


Norfast, Inc

Master Distributors of Progressive Construction Fasteners,
Equipment & Supplies



MADE IN USA

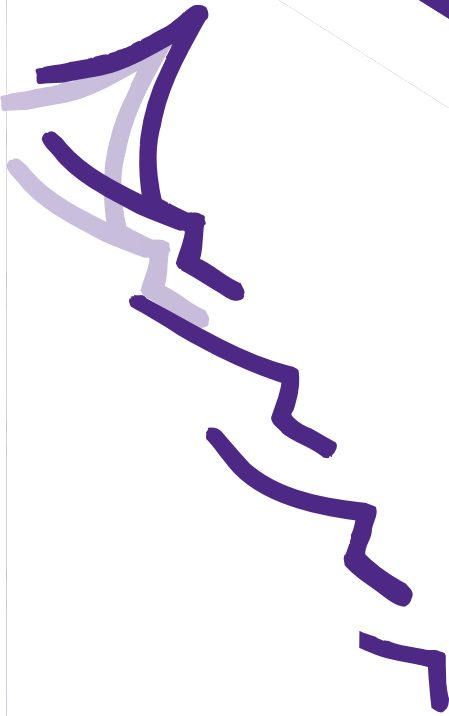

Trusted
Solutions

Contact us

norfastinc.com

info@norfastinc.com

Phone: 1.800.695.2088



Available
in PDF

Norfast, Inc.

Division of Colletti Companies, Inc.

Ordering Information

Phone

Local: 651-646-7677

Toll Free: 1-800-695-2088

Email

info@norfastinc.com

Website

www.norfastinc.com

Business Hours

7:00 AM - 3:45 PM CST

Monday — Friday

Trusted
Solutions

Terms and Conditions of Sale

Pricing Policy: prices are subject to change without notice.

Payment Terms

Net 30. All accounts 30 days past due will automatically go on hold status for future orders or back orders until account is brought up to date. All accounts over 30 days past due will be charged a finance fee of 1 1/2% per month. Norfast, Inc. reserves the right to withhold shipments from any account which has a balance exceeding the approved credit limit or does not pay invoices within stated terms. We accept checks and ACH. Payment by credit card will have an additional processing fee.

Freight Policy

Shipment prepaid on orders of \$500 net or more. F.O.B. St. Paul, Minnesota for Minnesota, North Dakota, South Dakota, Wisconsin, and Iowa. \$1,200 for other Mainland States.

Title and risk of loss shall pass to the customer upon delivery to carrier, regardless who pays the shipping costs.

Shipping Costs

Norfast, Inc. reserves the right to ship via the least expensive route. When instructed to ship via a more expensive route, customer will pay the shipping costs.

Shipping

Norfast, Inc. will make every effort to ship all orders the same day if orders are received before 2:00 PM, CST.

No Minimum Order

Blind Drop-Shipping

Shortages

If a shortage is incurred on a shipment, the carton must be retained for inspection by the carrier to determine if it was broken, open, or tampered with in any way. Norfast, Inc. must be notified of any shortages within 10 days of receipt of shipment or Norfast, Inc. will not be responsible for any shortages.

Return Goods Policy

- 1.** No credit will be given without prior approval. When material is returned, it must be accompanied by a copy of the original invoice and returned to Norfast, Inc. freight prepaid.
- 2.** A 20% restocking charge will be applied to returns. If product must be returned to the manufacturer, customer must pay those shipping charges.
- 3.** There will be no refund of shipping charges.
- 4.** Credit will be issued, less restocking charge, if applicable, at the prices originally charged if goods are returned with a copy of the original invoice, in salable condition, and in original packaging. If goods are returned otherwise, credit will be issued at a value determined by Norfast, Inc.
- 5.** Credit policy is valid for goods shipped within the preceding 3-month period. Goods purchased prior to the 3-month period are not eligible for return, exchange, or credit.

| | |
|--|---------------|
| A. Anchors..... | pages 6 - 23 |
| B. Acrylics & Epoxy Adhesives..... | pages 24 - 26 |
| C. Self-Drilling Screws..... | pages 27 - 34 |
| D. Drywall, Deck, & Construction Screws..... | pages 35 - 52 |
| E. Roofing & Insulation Screws..... | pages 53 - 56 |
| F. Polyurethane Foam & Sealants..... | pages 57 - 61 |
| G. Sammys® Threaded Rod Fasteners..... | pages 62 - 68 |
| H. Carbide Circular Saw Blades..... | pages 69 - 71 |
| I. Gas & Powder Actuated Fasteners..... | pages 72 - 73 |
| J. Carbide Drill Bits, Chisels, High Speed Bits..... | pages 74 - 86 |
| K. Insert Bits & Holders..... | pages 87 - 89 |
| L. Specialty Items..... | page 90 |
| M. Safety Glasses & Gloves..... | pages 91-92 |



Version 3.0
This product is made in the United States of America

Wedge Anchor

Carbon Steel - Zinc Plated



| Part Number | Size | Thread Length | Qty Per Box/Case |
|----------------|--------------|---------------|------------------|
| SIMSTB2-25134* | 1/4 x 1-3/4" | 15/16" | 100/500 |
| RHWS-1422 | 1/4 x 2-1/4" | 1-1/4" | 100/1000 |
| RHWS-1432 | 1/4 x 3-1/4" | 2-1/4" | 100/800 |
| RHWS-3822 | 3/8 x 2-1/4" | 1-1/8" | 50/500 |
| RHWS-3826 | 3/8 x 2-3/4" | 1-5/8" | 50/400 |
| RHWS-3830 | 3/8 x 3" | 1-3/4" | 50/400 |
| RHWS-3836 | 3/8 x 3-3/4" | 2-1/2" | 50/300 |
| RHWS-3850 | 3/8 x 5" | 3-3/4" | 50/250 |
| RHWS-3870 | 3/8 x 7" | 3-7/8" | 50/250 |
| RHWS-1226 | 1/2 x 2-3/4" | 1-1/4" | 25/200 |
| RHWS-1236 | 1/2 x 3-3/4" | 2-1/4" | 25/150 |
| RHWS-1242 | 1/2 x 4-1/4" | 2-3/4" | 25/150 |
| RHWS-1244 | 1/2 x 4-1/2" | 3" | 25/150 |
| RHWS-1254 | 1/2 x 5-1/2" | 4" | 25/150 |
| RHWS-1270 | 1/2 x 7" | 5-1/2" | 25/150 |
| RHWS-5834 | 5/8 x 3-1/2" | 1-3/4" | 10/100 |
| RHWS-5850 | 5/8 x 5" | 3-1/4" | 10/100 |
| RHWS-5860 | 5/8 x 6" | 4-1/4" | 10/50 |
| RHWS-5870 | 5/8 x 7" | 5-1/4" | 10/30 |
| RHWS-5884 | 5/8 x 8-1/2" | 5-3/4" | 10/30 |
| RHWS-58100 | 5/8 x 10" | 5-3/4" | 10/30 |
| RHWS-3446 | 3/4 x 4-3/4" | 2-7/8" | 10/60 |
| RHWS-3454 | 3/4 x 5-1/2" | 3-5/8" | 10/60 |
| RHWS-3462 | 3/4 x 6-1/4" | 4-3/8" | 10/30 |
| RHWS-3470 | 3/4 x 7" | 5-1/8" | 10/30 |
| RHWS-3484 | 3/4 x 8-1/2" | 5-3/4" | 10/30 |
| RHWS-34100 | 3/4 x 10" | 5-3/4" | 10/30 |
| RHWS-34120 | 3/4 x 12" | 1-3/4" | 10/30 |

*This anchor is not American Made



Wedge Anchor

304 Stainless Steel



| Part Numbers | Size | Thread Length | Qty Per Box/Case |
|--------------|--------------|---------------|------------------|
| RHWW-1416 | 1/4 x 1-3/4" | 3/4" | 100/1000 |
| RHWW-1422 | 1/4 x 2-1/4" | 1-1/4" | 100/1000 |
| RHWW-1432 | 1/4 x 3-1/4" | 2-1/4" | 100/800 |
| RHWW-3822 | 3/8 x 2-1/4" | 1-1/8" | 50/500 |
| RHWW-3826 | 3/8 x 2-3/4" | 1-5/8" | 50/400 |
| RHWW-3830 | 3/8 x 3" | 1-3/4" | 50/400 |
| RHWW-3836 | 3/8 x 3-3/4" | 2-1/2" | 50/300 |
| RHWW-3850 | 3/8 x 5" | 3-3/4" | 50/250 |
| RHWW-1226 | 1/2 x 2-3/4" | 1-1/4" | 25/200 |
| RHWW-1236 | 1/2 x 3-3/4" | 2-1/4" | 25/150 |
| RHWW-1242 | 1/2 x 4-1/4" | 2-3/4" | 25/150 |
| RHWW-1254 | 1/2 x 5-1/2" | 3" | 25/150 |
| RHWW-1270 | 1/2 x 7" | 3-1/2" | 25/150 |
| RHWW-5834 | 5/8 x 3-1/2" | 1-3/4" | 10/100 |
| RHWW-5842 | 5/8 x 4-1/4" | 2-1/2" | 10/100 |
| RHWW-5850 | 5/8 x 5" | 3-1/4" | 10/100 |
| RHWW-5860 | 5/8 x 6" | 4-1/4" | 10/50 |
| RHWW-5870 | 5/8 x 7" | 3-1/2" | 10/30 |
| RHWW-5884 | 5/8 x 8-1/2" | 3-1/2" | 10/30 |
| RHWW-3446 | 3/4 x 4-3/4" | 2-7/8" | 10/60 |
| RHWW-3454 | 3/4 x 5-1/2" | 3-5/8" | 10/50 |
| RHWW-3462 | 3/4 x 6-1/4" | 4-3/8" | 10/30 |
| RHWW-3470 | 3/4 x 7" | 3-1/2" | 10/30 |
| RHWW-3484 | 3/4 x 8-1/2" | 3-1/2" | 10/30 |
| RHWW-34100 | 3/4 x 10" | 1-3/4" | 10/30 |
| RHWW-10060 | 1 x 6" | 2-1/2" | 5/25 |
| RHWW-10090 | 1 x 9" | 2-1/2" | 5/15 |

316 Stainless Steel available by special order.

Wedge Anchor

Carbon Steel - Hot-Dipped Galvanized



| Part Number | Size | Thread Length | Qty Per Box/ Case |
|------------------|--------------|---------------|-------------------|
| RHWS-1226G | 1/2 x 2-3/4" | 1-1/4" | 25/200 |
| RHWS-1242G | 1/2 x 4-1/4" | 2-3/4" | 25/150 |
| RHWS-1254G | 1/2 x 5-1/2" | 4" | 25/150 |
| RHWS-1270G | 1/2 x 7" | 5-1/2" | 25/150 |
| RHWS-3446G | 3/4 x 4-3/4" | 2-7/8" | 10/60 |
| SIMSTB2-75512MG* | 3/4 x 5-1/2" | 3-3/16" | 10/40 |
| SIMSTB2-62600MG* | 5/8 x 6" | 3-15/16" | 10/80 |

*This anchor is not American Made

Tie Wire Wedge Anchor

Flathead



| Part Numbers | Size | Drill Size | Qty Per Box/Case |
|--------------|--------------|------------|------------------|
| RHTW-1400 | 1/4 x 2-1/8" | 1/4" | 100/1,000 |

Sleeve Anchors

Hex Nut - Carbon Steel - Zinc Plated



| Part Number | Size | Qty Per Box/Case |
|-------------|--------------|------------------|
| RHHN-3817 | 3/8 x 1-7/8" | 50/500 |
| RHHN-3830 | 3/8 x 3" | 50/400 |
| RHHN-1222 | 1/2 x 2-1/4" | 25/250 |
| RHHN-1230 | 1/2 x 3" | 25/200 |
| RHHN-1240 | 1/2 x 4" | 25/200 |
| RHHN-5842 | 5/8 x 4-1/4" | 10/100 |

Sleeve Anchors

Flat Head - Phillips - Carbon Steel - Zinc Plated



| Part Number | Size | Drive | Minimum Embedment | Maximum Material Thickness | Qty Per Box/Case |
|-------------|----------|-------|-------------------|----------------------------|------------------|
| RHFS-3840 | 3/8 x 4" | #3 | 1-1/2" | 2-1/2" | 50/400 |
| RHFS-3850 | 3/8 x 5" | #3 | 1-1/2" | 3-1/2" | 50/300 |
| SIM-FS3860 | 3/8 x 6" | #3 | 1-1/2" | 4-1/2" | 50/200 |

Other sizes available by special order.

Sleeve Anchors

Flat Head - Phillips - 303 Stainless Steel



| Part Number | Size | Drive | Minimum Embedment | Maximum Material Thickness | Qty Per Box/Case |
|-------------|--------------|-------------|-------------------|----------------------------|------------------|
| RHSFS-3826 | 3/8 x 2-7/8" | #3 Phillips | 1-1/2" | 1-3/8" | 50/500 |
| RHSFS-3840 | 3/8 x 4" | #3 Phillips | 1-1/2" | 2-1/2" | 50/400 |

Other sizes available by special order.

All American Anchor™

Carbon Steel - Yellow Zinc



| Part Number | Size | Thread Length | Minimum Embedment | Qty Per Case |
|-------------|--------------|---------------|-------------------|--------------|
| SAC-3060 | 3/8 x 2-3/8" | 1" | 1-1/4" | 100 |
| SAC-3090 | 3/8 x 3-1/2" | 1-1/8" | 1-1/4" | 100 |
| SAC-3120 | 3/8 x 5" | 2" | 1-1/4" | 50 |
| SAC-4070 | 1/2 x 2-3/4" | 1" | 1-1/2" | 50 |
| SAC-4090 | 1/2 x 3-1/2" | 1-1/8" | 1-1/2" | 50 |
| SAC-4120 | 1/2 x 4-3/4" | 2" | 1-1/2" | 50 |
| SAC-4150 | 1/2 x 6" | 2" | 1-1/2" | 30 |

Titen HD

Carbon Steel - Zinc Plated



| Part Number | Size | Drill Bit Diameter | Wrench Size | Qty Per Box/Case |
|-----------------|--------------|--------------------|-------------|------------------|
| SIMTHDB-25178H | 1/4 x 1-7/8" | 1/4" | 3/8" | 100/500 |
| SIMTHDB-25234H | 1/4 x 2-3/4" | 1/4" | 3/8" | 50/250 |
| SIMTHDB-25300H | 1/4 x 3" | 1/4" | 3/8" | 50/250 |
| SIMTHDB-25312H | 1/4 x 3-1/2" | 1/4" | 3/8" | 50/250 |
| SIMTHDB-25400H | 1/4 x 4" | 1/4" | 3/8" | 50/250 |
| SIMTHD-37134H | 3/8 x 1-3/4" | 3/8" | 9/16" | 50/250 |
| SIMTHD-37212H | 3/8 x 2-1/2" | 3/8" | 9/16" | 50/200 |
| SIMTHD-37300H* | 3/8 x 3" | 3/8" | 9/16" | 50/200 |
| SIMTHD-37400H* | 3/8 x 4" | 3/8" | 9/16" | 50/200 |
| SIMTHD-37500H* | 3/8 x 5" | 3/8" | 9/16" | 50/100 |
| SIMTHD-37600H* | 3/8 x 6" | 3/8" | 9/16" | 50/100 |
| SIMTHD-50300H | 1/2 x 3" | 1/2" | 3/4" | 25/100 |
| SIMTHD-50400H* | 1/2 x 4" | 1/2" | 3/4" | 20/80 |
| SIMTHD-50500H* | 1/2 x 5" | 1/2" | 3/4" | 20/80 |
| SIMTHD-50600H* | 1/2 x 6" | 1/2" | 3/4" | 20/80 |
| SIMTHD-50612H* | 1/2 x 6-1/2" | 1/2" | 3/4" | 20/40 |
| SIMTHD-50800H* | 1/2 x 8" | 1/2" | 3/4" | 20/40 |
| SIMTHD-501200H | 1/2 x 12" | 1/2" | 3/4" | 5/20 |
| SIMTHD-501300H | 1/2 x 13" | 1/2" | 3/4" | 5/20 |
| SIMTHD-501400H | 1/2 x 14" | 1/2" | 3/4" | 5/20 |
| SIMTHD-501500H | 1/2 x 15" | 1/2" | 3/4" | 5/20 |
| SIMTHDB-62100H | 5/8 x 10" | 5/8" | 15/16" | 10/20 |
| SIMTHDB-62400H | 5/8 x 4" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62500H* | 5/8 x 5" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62600H* | 5/8 x 6" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62612H* | 5/8 x 6-1/2" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62800H* | 5/8 x 8" | 5/8" | 15/16" | 10/20 |
| SIMTHD-75400H | 3/4 x 4" | 3/4" | 1-1/8" | 10/40 |
| SIMTHD-75500H | 3/4 x 5" | 3/4" | 1-1/8" | 5/20 |
| SIMTHDT-75600H | 3/4 x 6" | 3/4" | 1-1/8" | 5/20 |
| SIMTHD-75700H | 3/4 x 7" | 3/4" | 1-1/8" | 5/10 |
| SIMTHD-75812H* | 3/4 x 8-1/2" | 3/4" | 1-1/8" | 5/10 |
| SIMTHD-75100H* | 3/4 x 10" | 3/4" | 1-1/8" | 5/10 |

*Available Mechanically Galvanized

Titen HD Countersunk

Carbon Steel-Zinc Plated



| Part Number | Size | Drill Bit Diameter | Drive | Qty Per Box/Case |
|----------------|----------|--------------------|-------|------------------|
| SIMTHD-37400CS | 3/8 x 4" | 3/8" | T50 | 50/200 |
| SIMTHD-37500CS | 3/8 x 5" | 3/8" | T50 | 50/100 |

Titen HD

304 & 316 Stainless Steel



| 304 Part Number | 316 Part Number | Size | Drill Bit Diameter | Anchor Head Diameter | Qty Per Box/Case |
|-------------------|-------------------|--------------|--------------------|----------------------|------------------|
| SIMTHD-37300H4SS | SIMTHD-37300H6SS | 3/8 x 3" | 3/8" | 9/16" | 50/200 |
| SIMTHD-37400H4SS | SIMTHD-37400H6SS | 3/8 x 4" | 3/8" | 9/16" | 50/200 |
| SIMTHD-37500H4SS | SIMTHD-37500H6SS | 3/8 x 5" | 3/8" | 9/16" | 50/100 |
| SIMTHD-37600H4SS | SIMTHD-37600H6SS | 3/8 x 6" | 3/8" | 9/16" | 50/100 |
| SIMTHD-50300H4SS | SIMTHD-50300H6SS | 1/2 x 3" | 1/2" | 3/4" | 25/100 |
| SIMTHD-50400H4SS | SIMTHD-50400H6SS | 1/2 x 4" | 1/2" | 3/4" | 20/80 |
| SIMTHD-50500H4SS | SIMTHD-50500H6SS | 1/2 x 5" | 1/2" | 3/4" | 20/80 |
| SIMTHDB-62400H4SS | SIMTHDB-62400H6SS | 5/8 x 4" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62500H4SS | SIMTHDB-62500H6SS | 5/8 x 5" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62600H4SS | SIMTHDB-62600H6SS | 5/8 x 6" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62612H4SS | SIMTHDB-62612H6SS | 5/8 x 6-1/2" | 5/8" | 15/16" | 10/40 |
| SIMTHDB-62800H4SS | SIMTHDB-62800H6SS | 5/8 x 8" | 5/8" | 15/16" | 10/20 |
| SIMTHD-50600H4SS | SIMTHD-50600H6SS | 1/2 x 6" | 1/2" | 3/4" | 20/80 |
| SIMTHD-50612H4SS | SIMTHD-50612H6SS | 1/2 x 6-1/2" | 1/2" | 3/4" | 20/40 |
| SIMTHD-50800H4SS | SIMTHD-50800H6SS | 1/2 x 8" | 1/2" | 3/4" | 20/40 |
| SIMTHD-75400H4SS | SIMTHD-75400H6SS | 3/4 x 4" | 3/4" | 1-1/8" | 10/40 |
| SIMTHD-75500H4SS | SIMTHD-75500H6SS | 3/4 x 5" | 3/4" | 1-1/8" | 5/20 |
| SIMTHD-75600H4SS | SIMTHD-75600H6SS | 3/4 x 6" | 3/4" | 1-1/8" | 5/20 |
| SIMTHD-75700H4SS | SIMTHD-75700H6SS | 3/4 x 7" | 3/4" | 1-1/8" | 5/10 |
| | SIMTHD-75812H6SS | 3/4 x 8-1/2" | 3/4" | 1-1/8" | 5/10 |

LDT - Large Diameter Tapcon

Carbon Steel - Zinc Plated



| Part Number | Size | Drill Bit Diameter | Anchor Head Diameter | Qty Per Box/Case |
|-------------|--------------|--------------------|----------------------|------------------|
| RHLDT-3816 | 3/8 x 1-3/4" | 5/16" | 9/16" | 50/400 |
| RHLDT-3824 | 3/8 x 2-1/2" | 5/16" | 9/16" | 50/400 |
| RHLDT-3830 | 3/8 x 3" | 5/16" | 9/16" | 50/400 |
| RHLDT-3840 | 3/8 x 4" | 5/16" | 9/16" | 50/400 |
| RHLDT-3850 | 3/8 x 5" | 5/16" | 9/16" | 40/320 |
| RHLDT-1230 | 1/2 x 3" | 7/16" | 3/4" | 25/150 |
| RHLDT-1240 | 1/2 x 4" | 7/16" | 3/4" | 25/150 |
| RHLDT-1250 | 1/2 x 5" | 7/16" | 3/4" | 25/150 |
| RHLDT-1260 | 1/2 x 6" | 7/16" | 3/4" | 20/120 |
| RHLDT-5830 | 5/8 x 3" | 1/2" | 13/16" | 10/100 |
| RHLDT-5840 | 5/8 x 4" | 1/2" | 13/16" | 10/100 |
| RHLDT-5850 | 5/8 x 5" | 1/2" | 13/16" | 10/100 |
| RHLDT-5860 | 5/8 x 6" | 1/2" | 13/16" | 10/50 |
| RHLDT-3444 | 3/4 x 4-1/2" | 5/8" | 15/16" | 10/50 |
| RHLDT-3454 | 3/4 x 5-1/2" | 5/8" | 15/16" | 10/50 |
| RHLDT-3462 | 3/4 x 6-1/4" | 5/8" | 15/16" | 10/30 |

LDT - Large Diameter Tapcon

Stainless Steel



| Part Number | Size | Drill Bit Diameter | Anchor Head Diameter | Qty Per Box/Case |
|-------------|--------------|--------------------|----------------------|------------------|
| RHSLDT-3824 | 3/8 x 2-1/2" | 5/16" | 9/16" | 50/400 |
| RHSLDT-3830 | 3/8 x 3" | 5/16" | 9/16" | 50/400 |
| RHSLDT-3840 | 3/8 x 4" | 5/16" | 9/16" | 50/400 |
| RHSLDT-3850 | 3/8 x 5" | 5/16" | 9/16" | 40/320 |
| RHSLDT-1230 | 1/2 x 3" | 7/16" | 3/4" | 25/150 |
| RHSLDT-1240 | 1/2 x 4" | 7/16" | 3/4" | 25/150 |
| RHSLDT-1250 | 1/2 x 5" | 7/16" | 3/4" | 25/150 |



Drop-In Anchors

Flange-Top



| Part Number | Setting Tool | Bolt Size | Drill Size | Minimum Embedment | Qty Per Box/Case |
|-------------|--------------|-----------|------------|-------------------|------------------|
| SIMDIABL-25 | RHRT-114 | 1/4" | 3/8" | 1" | 100/500 |
| RHRM-38 | RHRT-138 | 3/8" | 1/2" | 1-5/8" | 50/500 |
| RHRM-12 | RHRT-112 | 1/2" | 5/8" | 2" | 50/400 |
| RHRM-58 | RHRT-158 | 5/8" | 7/8" | 2-1/2" | 25/125 |
| RHRM-34 | RHRT-134 | 3/4" | 1" | 3-3/16" | 25/100 |

Drop-In Anchors

Without Flange-Top



| Part Number | Setting Tool | Bolt Size | Drill Size | Minimum Embedment | Qty Per Box/Case |
|-------------|--------------|-----------|------------|-------------------|------------------|
| RHRL-14 | RHRT-114 | 1/4" | 3/8" | 1" | 100/1000 |
| RHRL-38 | RHRT-138 | 3/8" | 1/2" | 1-5/8" | 50/500 |
| RHRL-12 | RHRT-112 | 1/2" | 5/8" | 3/4" | 50/400 |
| RHRL-58 | RHRT-158 | 5/8" | 7/8" | 1" | 25/125 |
| RHRL-34 | RHRT-134 | 3/4" | 1" | 1-1/4" | 25/100 |

Drop-In Anchors

303 Stainless Steel without Flange



| Part Number | Setting Tool | Bolt Size | Drill Size | Minimum Embedment | Qty Per Box/Case |
|-------------|--------------|-----------|------------|-------------------|------------------|
| RHSRM-38 | RHRT-38 | 3/8" | 1/2" | 1-5/8" | 50/500 |
| RHSRM-12 | RHRT-112 | 1/2" | 5/8" | 2" | 50/400 |

Drop-In Anchors

Short Drop-In Flange-Top



| Part Number | Setting Tool | Bolt Size | Drill Size | Minimum Embedment | Qty Per Box/Case |
|-------------|--------------|-----------|------------|-------------------|------------------|
| RHRX-38 | RHRTX-138 | 3/8" | 1/2" | 3/4" | 100/1000 |
| RHRX-12 | RHRTX-112 | 1/2" | 5/8" | 1" | 50/500 |

Drive Nail Anchors

Zamac



| Part Number | Size | Pkg. Qty. | Pkgs./Master | Master Ctn. Qty. |
|------------------|--------------|-----------|--------------|------------------|
| TFZM187-0875-100 | 3/16 x 7/8" | 100 | 5 | 500 |
| SIMZN-25034 | 1/4 x 3/4" | 100 | 5 | 500 |
| TFZM250-1000-100 | 1/4 x 1" | 100 | 5 | 500 |
| TFZM250-1250-100 | 1/4 x 1-1/4" | 100 | 5 | 500 |
| TFZM250-1500-100 | 1/4 x 1-1/2" | 100 | 5 | 500 |
| TFZM250-2000-100 | 1/4 x 2" | 100 | 5 | 500 |
| SIMZN-25300 | 1/4 x 3" | 100 | 4 | 400 |

Drive Nail Anchors

304 Stainless Steel



| Part Number | Size | Drill Size | Minimum Embedment | Qty Per Box/Case |
|---------------|--------------|------------|-------------------|------------------|
| SIMZN-25100SS | 1/4 x 1" | 1/4" | 3/4" | 100/500 |
| SIMZN-25114SS | 1/4 x 1-1/4" | 1/4" | 3/4" | 100/500 |
| SIMZN-25112SS | 1/4 x 1-1/2" | 1/4" | 3/4" | 100/500 |
| SIMZN-25200SS | 1/4 x 2" | 1/4" | 3/4" | 100/500 |
| SIMZN-25300SS | 1/4 x 3" | 1/4" | 3/4" | 100/400 |

Nylon Anchors and Nylon Washers

Mushroom Head - Steel Nail



| Part Number | Size | Drill Size | Description | Qty Per Box/Case |
|----------------|--------------|------------|-------------------|------------------|
| GBT316-3XBU | 3/16 x 1" | 1/4" | | 100 |
| GBT416-8XSBU | 1/4 X 1" | 1/4" | | 100 |
| GBT416-10XSBU* | 1/4 X 1-1/2" | 1/4" | | 100 |
| GBT416-12XSBU | 1/4 X 2" | 1/4" | | 100 |
| GBT416-13XSBU | 1/4 X 3" | 1/4" | | 50 |
| GBT416-14XSBU | 1/4 x 4" | 1/4" | | 50 |
| GBT416-16XSBO | 1/4 x 3" | 1/4" | BODY ONLY/NO NAIL | 50 |
| BX-NYLON | 1/4 X 1-1/4" | 1/4" | NYLON WASHER | 1000 |

*1/4 x 1- 1/2 " is also available in Stainless Steel Nail

Toggler® Anchor System

Hollow Wall Anchors



| Part Number | Grip Range | Drill Size | Qty Per Box/Case |
|-------------|------------|------------|------------------|
| MPTA-100 | 1/8"-1/4" | 5/16" | 100/1,000 |
| MPTB-100 | 3/8"-1/2" | 5/16" | 100/1000 |
| MPTC-100 | 5/8"-3/4" | 5/16" | 100/1000 |
| MPTD-100 | 1" | 5/16" | 50/500 |

Toggle Bolts



| Part Number | Bolt Size | Grip Range | Hole Size | Qty Per Box/Case |
|-------------|-----------|-------------|-----------|------------------|
| MPBA-100 | 3/16"-24 | 3/8"-3-5/8" | 1/2" | 100/1000 |
| MPBB-100 | 1/4"-20 | 3/8"-3-5/8" | 1/2" | 100/1000 |
| MPBC-25 | 3/8"-16 | 3/8"-2-1/2" | 3/4" | 25/250 |
| MPBD-25 | 1/2"-13 | 3/8"-2-1/2" | 3/4" | 25/250 |

Alligator® Anchors

Solid Wall Anchors - Flange



| Part Number | Size | Screw Size | Hole Size | Qty Per Box/Case |
|-------------|-------|------------|-----------|------------------|
| MPAF5-5MM | 3/16" | #4-#10 | 3/16" | 200/2000 |
| MPAF6-6MM | 1/4" | #6-#14 | 1/4" | 100/1000 |
| MPAF8-8MM | 5/16" | #8-5/16 | 5/16" | 100/1000 |

E-Z ANCORS®

E-Z Ancor®



| Part Number | Length | Accommodates Screw Size | Qty Per Box/Case |
|-------------------|---------------|-------------------------|------------------|
| BX-5000902 | 1-5/8" | #6, #7, #8 | 100/1000 |

E-Z Ancor Plastic Plus™



| Part Number | Length | Accommodates Screw Size | Qty Per Box/Case |
|-------------------|---------------|-------------------------|------------------|
| BX-5035902 | 1-5/8" | #6, #7, #8 | 100/1000 |

E-Z Ancor Lite™



| Part Number | Length | Accommodates Screw Size | Qty Per Box/Case |
|-------------------|----------------|-------------------------|------------------|
| BX-5006902 | 1-5/16" | #6 | 100/1000 |

E-Z Toggle™



| Part Number | Length | Accommodates Screw Size | Qty Per Box/Case |
|-------------------|---------------|-------------------------|------------------|
| BX-5014901 | 2-1/2" | #8 | 50/500 |

Plastic Screw Anchors

Ribbed with Tabs



| Part Number | Size | Screw Size | Hole Size | Qty Per Box/Case |
|-------------|---------------|------------|-----------|------------------|
| CO-2001 | 3/16 x 1" | #8-10 | 3/16" | 100/1,000 |
| CO-2002 | 1/4 x 1-1/4" | #10-12 | 1/4" | 100/1,000 |
| CO-2003 | 5/16 x 1-1/2" | #12-14 | 5/16" | 100/1,000 |

Plastic Screw Anchors

Conical



| Part Number | Size | Screw Size | Drill Size | Qty Per Box |
|---------------|---------------|------------|------------|-------------|
| USCPA-48BXB | 3/16 x 3/4" | #6-8 | 3/16" | 100 |
| USCPA-610BXB | 3/16 x 7/8" | #8-10 | 3/16" | 100 |
| USCPA-1012BXB | 1/4 x 1" | #10-12 | 1/4" | 100 |
| USCPA-1416BXB | 5/16 x 1-3/8" | #14-16 | 5/16" | 50 |

Plastic Screw Anchors

Conical - Kit



| Part Number | Size | Screw Size | Drill Size | Qty Per Box |
|--------------|---------------|--------------|------------|-------------|
| IT-807AK0010 | 3/16 x 7/8" | #8 x 1" | 3/16" | 100 |
| IT-807AK0011 | 1/4 x 1" | #10 x -1/4" | 1/4" | 100 |
| IT-807AK0013 | 5/16 x 1-3/8" | #12 x 1-1/2" | 5/16" | 50 |

Plastic Screw Anchors

Ribbed with Tabs - Kit



| Part Number | Size | Screw Size | Drill Size | Qty Per Box |
|--------------|---------------|--------------|------------|-------------|
| IT-SUPRAK006 | 3/16 x 7/8" | #8 x 1" | 7/8" | 100 |
| IT-SUPRAK008 | 1/4 x 1" | #10 x -1/4" | 1/4" | 100 |
| IT-807AK0013 | 5/16 x 1-3/8" | #12 x 1-1/2" | 5/16" | 50 |

Perma-Grip® Concrete Anchors

Double Hot-Dipped Galvanized - Spiral-Shanked - Fluted
PACKAGED

THE ORIGINAL GRIPCON
perma-grip®



| Part Number | Size | SDS Bit - Usable - Overall | Weight Per Case (lbs) | Qty Per Box/Case |
|-------------|--------|----------------------------|-----------------------|------------------|
| PG-0118 | 1-1/8" | 3/16" x 2"-4" | 8 | 100/500 |
| PG-0112 | 1-1/2" | 3/16" x 2"-4" | 10 | 100/500 |
| PG-0200 | 2" | 3/16" x 4"-6" | 11 | 100/500 |
| PG-0212 | 2-1/2" | 3/16" x 4"-6" | 14 | 100/500 |
| PG-0300 | 3" | 3/16" x 4"-6" | 16 | 100/500 |
| PG-0312 | 3-1/2" | 3/16" x 4"-6" | 19 | 100/500 |
| PG-0400 | 4" | 3/16" x 6"-8" | 22 | 100/500 |
| PG-0500 | 5" | 3/16" x 6"-8" | 26 | 100/500 |
| PG-0512 | 5-1/2" | 3/16" x 6"-8" | 28 | 100/500 |

Packaged consists of fasteners only. No drill bits included

Perma-Grip® Concrete Anchors

Double Hot-Dipped Galvanized - Spiral-Shanked - Fluted - **BULK**



| Part Number | Size | SDS Bit - Usable - Overall | Weight Per Case (lbs) | Qty Per Box/Case |
|-------------|--------|----------------------------|-----------------------|------------------|
| PG-0118B | 1-1/8" | 3/16" x 2"-4" | 16 | 1,000 |
| PG-0112B | 1-1/2" | 3/16" x 2"-4" | 20 | 1,000 |
| PG-0200B | 2" | 3/16" x 4"-6" | 22 | 1,000 |
| PG-0212B | 2-1/2" | 3/16" x 4"-6" | 28 | 1,000 |
| PG-0300B | 3" | 3/16" x 4"-6" | 32 | 1,000 |
| PG-0312B | 3-1/2" | 3/16" x 4"-6" | 19 | 500 |
| PG-0400B | 4" | 3/16" x 6"-8" | 22 | 500 |
| PG-0500B | 5" | 3/16" x 6"-8" | 26 | 500 |
| PG-0512B | 5-1/2" | 3/16" x 6"-8" | 28 | 500 |

Packaged consists of fasteners only. No drill bits included

Drill Bits

SDS-Plus



| Part Number | Drill Bit Diameter | Usable Length | Overall Length |
|--------------|--------------------|---------------|----------------|
| DRAD-410-104 | 3/16" | 2" | 4 1/2" |
| DRAD-415-215 | 3/16" | 4" | 6 1/4" |
| DRAD-420-221 | 3/16" | 7" | 9 1/2" |
| DRAD-425-216 | 3/16" | 9" | 11 1/2" |
| DRAD-430-260 | 3/16" | 13" | 16" |

Stress Plates

26 Gauge Galvalume™ Plated Metal



| Part Number | Description | Diameter | Hole Size | Qty Per Case |
|-------------|-------------|----------|-----------|--------------|
| TFMP-2000 | Metal | 2" | 1/4" | 1000 |
| TFMP-3000 | Metal | 3" | 1/4" | 1000 |

Fastener Features


- Hot-Dipped galvanized for use in ACQ treated lumber
- No special driving tools required
- No head shearing
- Control of embedment
- Excellent shear strength
- High Performance at lower cost
- Available in extra long lengths
- Can be used with straight shank or SDS - Plus drill bits
- Compatible with metal stress plates

Fastener Installation

In selecting the correct Perma-grip® fastener length, add 1" to the fixture thickness. Then, with a 3/16" drill bit, drill through the fixture into the concrete. Pilot holes are to be 1/4" deeper than the engagement of the Perma-grip® fastener. Tap the Perma-grip® fastener with a hammer until securely seated.

perma-grip® Strength Characteristics: Average Ultimate Pullout Values


Concrete Pullout



Shank Engagement

(19.1 mm) (25.4 mm)
 420 lbs. (190.5 kg) at 3/4" engagement
 1016 lbs. (460.9 kg) at 1" engagement


Hollow Block Pullout



Shank Engagement

(19.1 mm) (25.4 mm)
 240 lbs. (108.9 kg) at 3/4" engagement
 380 lbs. (172.4 kg) at 1" engagement

Shear Strength

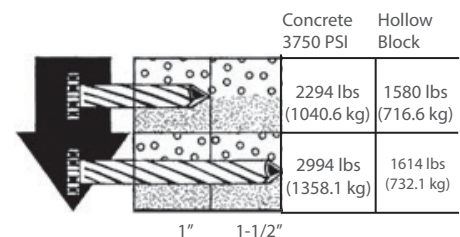

Shank Engagement

(25.4 mm) (38 mm)

www.perma-grip.com

1/4 " Concrete Spikes

Carbon Steel – Epoxy E-Coat



| Part Number | Size | Drill Bit Diameter | Weight Per Package (lbs) | Qty Per Package |
|---------------|--------|--------------------|--------------------------|-----------------|
| TFTS250-1250 | 1-1/4" | 1/4" | 11 | 500/Bucket |
| TFTS250-1500 | 1-1/2" | 1/4" | 13 | 500/Bucket |
| TFTS250-2000 | 2" | 1/4" | 17 | 500/Bucket |
| TFTS250-2500 | 2-1/2" | 1/4" | 20 | 500/Bucket |
| TFTS250-3000 | 3" | 1/4" | 24 | 500/Bucket |
| TFTS250-3500 | 3-1/2" | 1/4" | 27 | 500/Bucket |
| TFTS250-4000 | 4" | 1/4" | 31 | 500/Bucket |
| TFTS250-4500 | 4-1/2" | 1/4" | 34 | 500/Bucket |
| TFTS250-5000 | 5" | 1/4" | 38 | 500/Bucket |
| TFTS250-5500 | 5-1/2" | 1/4" | 41 | 500/Bucket |
| TFTS250-6000 | 6" | 1/4" | 23 | 250/Bucket |
| TFTS250-6500 | 6-1/2" | 1/4" | 25 | 250/Bucket |
| TFTS250-7000 | 7" | 1/4" | 27 | 250/Bucket |
| TFTS250-7500 | 7-1/2" | 1/4" | 28 | 250/Bucket |
| TFTS250-8000 | 8" | 1/4" | 30 | 250/Bucket |
| TFTS250-9000 | 9" | 1/4" | 34 | 250/Bucket |
| TFTS250-10000 | 10" | 1/4" | 37 | 250/Bucket |
| TFTS250-11000 | 11" | 1/4" | 16 | 100/Carton |
| TFTS250-12000 | 12" | 1/4" | 18 | 100/Carton |
| TFTS250-13000 | 13" | 1/4" | 19 | 100/Carton |
| TFTS250-14000 | 14" | 1/4" | 21 | 100/Carton |
| TFTS250-15000 | 15" | 1/4" | 22 | 100/Carton |
| TFTS250-16000 | 16" | 1/4" | 23 | 100/Carton |

ANSI Drill Bit Size: 1/4" diameter

- Pre-drill a 1/4" diameter hole using a drill bit that meets the requirement of ANSI Standard B212.15
- The hole must be a minimum of 1/2" deeper than the fastener embedment
- The fastener is installed with a hammer to a minimum embedment of 1"

Material Specifications

- Material: AISI 1038 Carbon Steel
- Coating: Tru-Kote™ Epoxy E-Coat

Code Approvals & Listings

- FM Global



Tapcon® Concrete Screw

Blue Climaseal™ Coated - Hi-Lo Thread Nail Point
Star Drive - Flat Head - PACKAGED



| Part Number | Size | Head Style | Drive | Straight Shank Bit | SDS Bit | | Qty Per Box/ Case |
|--------------|---------------|------------|-------|--------------------|----------------|--|----------------------|
| | | | | | Usable-Overall | | |
| BX-3169407V2 | 3/16 x 1-1/4" | FLAT | T-25 | 5/32 x 3-1/2" | 5/32 x 2-4" | | 100/500 |
| BX-3171407V2 | 3/16 x 1-3/4" | FLAT | T-25 | 5/32 x 3-1/2" | 5/32 x 2-4" | | 100/500 |
| BX-3173407V2 | 3/16 x 2-1/4" | FLAT | T-25 | 5/32 x 4-1/2" | 5/32 x 4-6" | | 100/500 |
| BX-3175407V2 | 3/16 x 2-3/4" | FLAT | T-25 | 5/32 x 4-1/2" | 5/32 x 4-6" | | 100/500 |
| BX-3177407V2 | 3/16 x 3-1/4" | FLAT | T-25 | 5/32 x 5-1/2" | 5/32 x 4-6" | | 100/500 |
| BX-3183407V2 | 1/4 x 1-1/4" | FLAT | T-30 | 3/16 x 3-1/2" | 3/16 x 2-4" | | 100/500 |
| BX-3185407V2 | 1/4 x 1-3/4" | FLAT | T-30 | 3/16 x 3-1/2" | 3/16 x 2-4" | | 100/500 |
| BX-3187407V2 | 1/4 x 2-1/4" | FLAT | T-30 | 3/16 x 4-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3189407V2 | 1/4 x 2-3/4" | FLAT | T-30 | 3/16 x 4-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3191407V2 | 1/4 x 3-1/4" | FLAT | T-30 | 3/16 x 5-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3193407V2 | 1/4 x 3-3/4" | FLAT | T-30 | 3/16 x 5-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3195407V2 | 1/4 x 4" | FLAT | T-30 | 3/16 x 5-1/2" | 3/16 x 6-8" | | 100/500 |
| BX-3197407V2 | 1/4 x 5" | FLAT | T-30 | 3/16 x 6-1/2" | 3/16 x 6-8" | | 100/500 |
| BX-3203407V2 | 1/4 x 6" | FLAT | T-30 | 3/16 x 7-1/2" | 3/16 x 10-12" | | 100/400 |

*One Tapcon drill bit included in each box of 100 anchors.

Tapcon® Concrete Screw

Blue Climaseal™ Coated - Hi-Lo Thread - Nail Point
Slotted - Hex Washer Head - PACKAGED



| Part Number | Size | Head Style | Drive | Straight Shank Bit | SDS Bit | | Qty Per Box/ Case |
|-------------|---------------|------------|-------|--------------------|----------------|--|----------------------|
| | | | | | Usable-Overall | | |
| BX-3139407 | 3/16 x 1-1/4" | HWH | 1/4" | 5/32 x 3-1/2" | 5/32 x 2-4" | | 100/500 |
| BX-3141407 | 3/16 x 1-3/4" | HWH | 1/4" | 5/32 x 3-1/2" | 5/32 x 2-4" | | 100/500 |
| BX-3143407 | 3/16 x 2-1/4" | HWH | 1/4" | 5/32 x 4-1/2" | 5/32 x 4-6" | | 100/500 |
| BX-3145407 | 3/16 x 2-3/4" | HWH | 1/4" | 5/32 x 4-1/2" | 5/32 x 4-6" | | 100/500 |
| BX-3147407 | 3/16 x 3-1/4" | HWH | 1/4" | 5/32 x 5-1/2" | 5/32 x 4-6" | | 100/500 |
| BX-3153407 | 1/4 x 1-1/4" | HWH | 5/16" | 3/16 x 3-1/2" | 3/16 x 2-4" | | 100/500 |
| BX-3155407 | 1/4 x 1-3/4" | HWH | 5/16" | 3/16 x 3-1/2" | 3/16 x 2-4" | | 100/500 |
| BX-3157407 | 1/4 x 2-1/4" | HWH | 5/16" | 3/16 x 4-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3159407 | 1/4 x 2-3/4" | HWH | 5/16" | 3/16 x 4-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3161407 | 1/4 x 3-1/4" | HWH | 5/16" | 3/16 x 5-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3163407 | 1/4 x 3-3/4" | HWH | 5/16" | 3/16 x 5-1/2" | 3/16 x 4-6" | | 100/500 |
| BX-3165407 | 1/4 x 4" | HWH | 5/16" | 3/16 x 5-1/2" | 3/16 x 6-8" | | 100/500 |
| BX-3167407 | 1/4 x 5" | HWH | 5/16" | 3/16 x 6-1/2" | 3/16 x 6-8" | | 100/500 |
| BX-3205407 | 1/4 x 6" | HWH | 5/16" | 3/16 x 7-1/2" | 3/16 x 10-12" | | 100/400 |

*One Tapcon drill bit included in each box of 100 anchors.



Tapcon® 410 Stainless Steel Concrete Screws

Silver Climaseal™ coated over 410 Stainless Steel - Hi-Lo Thread

Nail Point - Phillips Drive - Flat Head - Packaged



| Part Number | Size | Head Style | Drive | Straight Shank Bit | SDS Bit - Usable - Overall | Qty Per Box/Case |
|-------------|---------------|------------|-------|--------------------|----------------------------|------------------|
| BX-3418907 | 3/16 x 1-3/4" | FLAT | #2 | 5/32 x 4-1/2" | 5/32 x 7" | 100/500 |
| BX-3419907 | 3/16 x 2-1/4" | FLAT | #2 | 5/32 x 4-1/2" | 5/32 x 7" | 100/500 |
| BX-3420907 | 3/16 x 2-3/4" | FLAT | #2 | 5/32 x 4-1/2" | 5/32 x 7" | 100/500 |
| BX-3373907 | 1/4 x 1-1/4" | FLAT | #3 | 3/16 x 3-1/2" | 3/16 x 2-4" | 100/500 |
| BX-3374907 | 1/4 x 1-3/4" | FLAT | #3 | 3/16 x 3-1/2" | 3/16 x 2-4" | 100/500 |
| BX-3375907 | 1/4 x 2-1/4" | FLAT | #3 | 3/16 x 4-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3376907 | 1/4 x 2-3/4" | FLAT | #3 | 3/16 x 4-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3377907 | 1/4 x 3-1/4" | FLAT | #3 | 3/16 x 5-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3378907 | 1/4 x 3-3/4" | FLAT | #3 | 3/16 x 5-1/2" | 3/16 x 4-6" | 100/500 |

*One Tapcon drill bit included in each box of 100 anchors.

*410 Stainless Steel for added corrosion protection.

Tapcon® 410 Stainless Steel Concrete Screws

Silver Climaseal™ coated over 410 Stainless Steel - Hi-Lo Thread

Nail Point - Slotted - Hex Washer Head - Packaged



| Part Number | Size | Head Style | Drive | Straight Shank Bit | SDS Bit - Usable - Overall | Qty Per Box/Case |
|-------------|--------------|------------|-------|--------------------|----------------------------|------------------|
| BX-3367907 | 1/4 x 1-1/4" | HWH | 5/16" | 3/16 x 3-1/2" | 3/16 x 2-4" | 100/500 |
| BX-3368907 | 1/4 x 1-3/4" | HWH | 5/16" | 3/16 x 3-1/2" | 3/16 x 2-4" | 100/500 |
| BX-3369907 | 1/4 x 2-1/4" | HWH | 5/16" | 3/16 x 4-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3370907 | 1/4 x 2-3/4" | HWH | 5/16" | 3/16 x 4-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3371907 | 1/4 x 3-1/4" | HWH | 5/16" | 3/16 x 5-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3372907 | 1/4 x 3-3/4" | HWH | 5/16" | 3/16 x 5-1/2" | 3/16 x 4-6" | 100/500 |
| BX-3460907 | 1/4 x 5" | HWH | 5/16" | 3/16 x 5-1/2" | 3/16 x 4-6" | 100/500 |

*One Tapcon drill bit included in each box of 100 anchors.

*410 Stainless Steel for added corrosion protection.



Tapcon Drill Bits

Straight Shank



| Part Number | Drill Bit Diameter | Overall Length | Pack Qty |
|--------------|--------------------|----------------|----------|
| DRTA-010-001 | 5/32" | 3-1/2" | 10 |
| DRTA-020-002 | 5/32" | 4-1/2" | 10 |
| DRTA-030-003 | 5/32" | 5-1/2" | 10 |
| DRTA-040-004 | 3/16" | 3-1/2" | 10 |
| DRTA-050-005 | 3/16" | 4-1/2" | 10 |
| DRTA-060-006 | 3/16" | 5-1/2" | 10 |

SDS Plus Tapcon Bit

with Hex Drive for use with Condrive 1000



| Part Number | Drill Bit Diameter | Usable Length | Overall Length |
|--------------|--------------------|---------------|----------------|
| DRTS-002-002 | 5/32 | 3" | 6" |
| DRTS-003-003 | 5/32 | 4" | 7" |
| DRTS-005-005 | 3/16 | 3" | 6" |
| DRTS-006-006 | 3/16 | 4" | 7" |

Installation Tool

| Part Number | Description |
|-------------|----------------|
| BX-3103910 | Condrive® 1000 |



Kit includes:

- Drill adapter
- Sleeve
- 3/16" socket
- 1/4" socket
- Phillips socket



Red Head A7+ Adhesive



| Part Number | Description | Box Qty |
|-------------|--|---------|
| RHA7P-10 | Red Head A7+ 9.5 oz Cartridge w/ Nozzle | 6 |
| RHA7P-28 | Red Head A7+ 28oz Cartridge w/ Nozzle | 4 |

Key Features

- The only quick-cure ICC-ES approved for use in all wet conditions
- Qualified for use in concrete, block, brick, and clay tile. Solid or hollow base materials
- ICC-ES approved for cracked concrete and seismic applications (ICC-ES-ESR 3903)
- ICC-ES approved for masonry applications (ICC-ES ESR 3951)
- No drip formula that allows direct-injection overhead installation
- 18 month shelf life
- NSF/ANSI 61





Red Head C6+ Adhesive



| Part Number | Description | Box Qty |
|-------------|---|---------|
| RHC6P-15 | Red Head C6+ 15.2oz. Cartridge w/ Nozzle | 6 |
| RHC6P-30 | Red Head C6+ 30.4oz. Cartridge w/ Nozzle | 4 |

Key Features

- At least 25% stronger than the old C6+ formulation or threaded rod in cracked concrete and with seismic conditions
- Fastest cure time in its class, curing in just 2.75 hours at 90°F and in only 2 hours at 110°F!
- ICC-ES approved for use in core-drill holes, even in cracked concrete
- Can be used in oversized holes
- 24 month shelf life
- NSF/ANSI 61

|  |  |  |  |
|---|---|---|---|
| A7+ Adhesive | HY-100 HY-200 HY-270 HY-ICE | AC-100+ AC-200+ AC-50 | AT-XP AT-3G |
| C6+ Adhesive | RE-500V3 | Pure50+ Pure100+ Pure220+ | SET-XP SET-3G ET-3G |



Red Head A7+ Dispensing Tools

| Part Number | Description |
|-------------|--|
| RHA100 | 10oz. Manual Tool (RHA7P-10) |
| RHA102-V3 | 28oz. HD Manual Tool (RHA7P-28) |
| RHA200 | 28oz. Pneumatic Tool (RHA7P-28) |
| RHA300 | 28oz/30oz Battery Tool (A7P-28,C6P-30) |



Red Head C6+ Dispensing Tools

| Part Number | Description |
|-------------|--|
| RHD100 | 15.2oz HD Manual Tool (C6P-15) |
| RHD102 | 30.4oz HD Manual Tool (C6P-30) |
| RHD200 | 15.2oz Ergonomic Pneumatic Tool (C6P-15) |

| Part Number | Description |
|-------------|--|
| RHD202 | 30.4oz Pneumatic Tool (C6P-30) |
| RHD300 | 15.2oz Battery Tool (C6P-15) |
| RHA300 | 28oz/30oz Battery Tool (A7P-28 and C6P-30) |



Dispensing Accessories

| Part Number | Description | Used With | Box Qty |
|-------------|------------------|----------------|---------|
| RHA24S | Short Nozzle | A7P-10, C6P-15 | 24 |
| RHS55 | Standard Nozzle | A7P-28, C6P-30 | 24 |
| RHE55 | Long Nozzle | A7P-28, C6P-30 | 24 |
| RHS75 | High Flow Nozzle | A7P-28, C6P-30 | 24 |



Adhesive Selection Guide



A7 + 28 oz.



RHA102-V3



RHA300

RHS55



Qty/Carton: 24 "Standard" Mixing Nozzle

RHE55



Qty/Carton: 24 "Long" Mixing Nozzle

RHS75



Qty/Carton: 24 "High Flow" Mixing Nozzle

A7 + 10 oz.



RHA100

RHA24S



Qty/Carton: 24 "Short" Mixing Nozzle

C6 + 30 oz.



RHD102



RHA300

RHS55



Qty/Carton: 24 "Standard" Mixing Nozzle

RHE55



Qty/Carton: 24 "Long" Mixing Nozzle

RHS75



Qty/Carton: 24 "High Flow" Mixing Nozzle

C6 + 15 oz.



RHD100

RHA24S



Qty/Carton: 24 "Short" Mixing Nozzle

Hollow Base Material Applications

Additional accessories available by special order:


- Hole Plugs: 3/8"-1-1/4"
- Piston Plugs
- Wire Brushes - 3/8" - 1-1/4"
- Wire Brush Extensions
- Blow Pump
- 6 Foot Tubing
- Stainless Steel Screen Tubes - 1/4"-3/4"
- Nylon Screen Tubes 3/8"-3/4"
- Stubby Screens - 1/4"- 5/8"
- Umbrella Anchor



HB Stainless Screen

HBP Nylon Screen

Zinc Plated Self-Drilling Screws




Zinc Plated - Hex Washer Head - Unslotted - Indented

| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight per case | Qty Per Case |
|-------------|----------------|-------|------------|----------------------|-----------------|--------------|
| CIHHD-08012 | 8-18 x 1/2" | 2 | 1/4" | 22-15 gauge | 35 | 10,000 |
| CIHHD-08034 | 8-18 x 3/4" | 2 | 1/4" | 22-15 gauge | 45 | 10,000 |
| CIHHD-08100 | 8-18 x 1" | 2 | 1/4" | 22-15 gauge | 44 | 8,000 |
| CIHHD-08114 | 8-18 x 1-1/4" | 2 | 1/4" | 22-15 gauge | 33 | 5,000 |
| CIHHD-08112 | 8-18 x 1-1/2" | 2 | 1/4" | 22-15 gauge | 38 | 5,000 |
| CIHHD-10012 | 10-16 x 1/2" | 2 | 5/16" | 24-12 gauge | 40 | 8,000 |
| CIHHD-10034 | 10-16 x 3/4" | 3 | 5/16" | 24-12 gauge | 50 | 8,000 |
| CIHHD-10100 | 10-16 x 1" | 3 | 5/16" | 24-12 gauge | 40 | 5,000 |
| CIHHD-10114 | 10-16 x 1-1/4" | 3 | 5/16" | 24-12 gauge | 37 | 4,000 |
| CIHHD-10112 | 10-16 x 1-1/2" | 3 | 5/16" | 24-12 gauge | 32 | 3,000 |
| CIHHD-10200 | 10-16 x 2" | 3 | 5/16" | 24-12 gauge | 26 | 2,000 |
| CIHHD-10300 | 10-16 x 3" | 3 | 5/16" | 24-12 gauge | 18 | 1,000 |
| CIHHD-12034 | 12-14 x 3/4" | 3 | 5/16" | 20-12 gauge | 33 | 4,000 |
| CIHHD-12100 | 12-14 x 1" | 3 | 5/16" | 20-12 gauge | 40 | 4,000 |
| CIHHD-12114 | 12-14 x 1-1/4" | 3 | 5/16" | 20-12 gauge | 35 | 3,000 |
| CIHHD-12112 | 12-14 x 1-1/2" | 3 | 5/16" | 20-12 gauge | 40 | 3,000 |
| CIHHD-12200 | 12-14 x 2" | 3 | 5/16" | 20-12 gauge | 33 | 2,000 |
| CIHHD-12212 | 12-14 x 2-1/2" | 3 | 5/16" | 20-12 gauge | 30 | 1,500 |
| CIHHD-12300 | 12-14 x 3" | 3 | 5/16" | 20-12 gauge | 23 | 1,000 |
| CIHHD-12400 | 12-14 x 4" | 3 | 5/16" | 20-12 gauge | 16 | 500 |
| CIHHD-14034 | 14-14 x 3/4" | 3 | 3/8" | 18-8 gauge | 50 | 4,000 |
| CIHHD-14100 | 14-14 x 1" | 3 | 3/8" | 18-8 gauge | 45 | 3,000 |
| CIHHD-14114 | 14-14 x 1-1/4" | 3 | 3/8" | 18-8 gauge | 35 | 2,000 |
| CIHHD-14112 | 14-14 x 1-1/2" | 3 | 3/8" | 18-8 gauge | 40 | 2,000 |
| CIHHD-14134 | 14-14 x 1-3/4" | 3 | 3/8" | 18-8 gauge | 34 | 1,500 |
| CIHHD-14200 | 14-14 x 2" | 3 | 3/8" | 18-8 gauge | 38 | 1,500 |
| CIHHD-14212 | 14-14 x 2-1/2" | 3 | 3/8" | 18-8 gauge | 30 | 1,000 |
| CIHHD-14300 | 14-14 x 3" | 3 | 3/8" | 18-8 gauge | 35 | 1,000 |
| CIHHD-14400 | 14-14 x 4" | 3 | 3/8" | 18-8 gauge | 22 | 500 |
| CIHHD-14412 | 14-14 x 4-1/2" | 3 | 3/8" | 18-8 gauge | 24 | 500 |
| CIHHD-14500 | 14-14 x 5" | 3 | 3/8" | 18-8 gauge | 27 | 500 |
| CIHHD-14600 | 14-14 x 6" | 3 | 3/8" | 18-8 gauge | 31 | 500 |

25% up charge for broken cases.

Pan Head - Phillips Drive - Zinc Plated



| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|------------|----------------------|-----------------|--------------|
| CIPHD-08038 | 8-18 x 3/8" | 2 | #2 | 22-15 gauge | 28 | 10,000 |
| CIPHD-08012 | 8-18 x 1/2" | 2 | #2 | 22-15 gauge | 32 | 10,000 |
| CIPHD-08058 | 8-18 x 5/8" | 2 | #2 | 22-15 gauge | 37 | 10,000 |
| CIPHD-08034 | 8-18 x 3/4" | 2 | #2 | 22-15 gauge | 42 | 10,000 |
| CIPHD-08100 | 8-18 x 1" | 2 | #2 | 22-15 gauge | 41 | 8,000 |
| CIPHD-08114 | 8-18 x 1-1/4" | 2 | #2 | 22-15 gauge | 31 | 5,000 |
| CIPHD-08112 | 8-18 x 1-1/2" | 2 | #2 | 22-15 gauge | 35 | 5,000 |
| CIPHD-08200 | 8-18 x 2" | 2 | #2 | 22-15 gauge | 27 | 3,000 |
| CIPHD-10012 | 10-16 x 1/2" | 2 | #2 | 24-12 gauge | 45 | 10,000 |
| CIPHD-10058 | 10-16 x 5/8" | 2 | #2 | 24-12 gauge | 52 | 10,000 |
| CIPHD-10034 | 10-16 x 3/4" | 3 | #2 | 24-12 gauge | 47 | 8,000 |
| CIPHD-10100 | 10-16 x 1" | 3 | #2 | 24-12 gauge | 38 | 5,000 |
| CIPHD-10114 | 10-16 x 1-1/4" | 3 | #2 | 24-12 gauge | 41 | 5,000 |
| CIPHD-10112 | 10-16 x 1-1/2" | 3 | #2 | 24-12 gauge | 40 | 4,000 |
| CIPHD-10200 | 10-16 x 2" | 3 | #2 | 24-12 gauge | 38 | 3,000 |
| CIPHD-10212 | 10 x 2 1/2" | 3 | #2 | 24-12 gauge | 21 | 1,500 |
| CIPHD-10300 | 10-16 x 3" | 3 | #2 | 24-12 gauge | 19 | 1,000 |

25% upcharge for broken cases.

Oval Head - Phillips Drive - Zinc Plated



| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|---------------|-------|------------|----------------------|-----------------|--------------|
| CIOHD-08034 | 8-18 x 3/4" | 2 | #2 | 22-15 gauge | 40 | 10,000 |
| CIOHD-08100 | 8-18 x 1" | 2 | #2 | 22-15 gauge | 38 | 7,500 |
| CIOHD-08114 | 8-18 x 1-1/4" | 2 | #2 | 22-15 gauge | 36 | 6,000 |
| CIOHD-08112 | 8-18 x 1-1/2" | 2 | #2 | 22-15 gauge | 36 | 5,000 |

25% upcharge for broken cases.

Self-Drilling Screws with Bonded Washers

Hex Washer Head - Unslotted - Indented - Zinc Plated

Assembled with Bonded Neo-EPDM Washer



| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|------------|----------------------|-----------------|--------------|
| CIBW-08012 | 8-18 x 1/2" | 2 | 1/4" | 22-15 gauge | 28 | 5,000 |
| CIBW-08034 | 8-18 x 3/4" | 2 | 1/4" | 22-15 gauge | 33 | 5,000 |
| CIBW-08100 | 8-18 x 1" | 2 | 1/4" | 22-15 gauge | 30 | 4,000 |
| CIBW-08114 | 8-18 x 1-1/4" | 2 | 1/4" | 22-15 gauge | 26 | 3,000 |
| CIBW-08112 | 8-18 x 1-1/2" | 2 | 1/4" | 22-15 gauge | 24 | 2,500 |
| CIBW-08200 | 8-18 x 2" | 2 | 1/4" | 22-15 gauge | 29 | 2,500 |
| CIBW-10012 | 10-16 x 1/2" | 2 | 5/16" | 24-12 gauge | 30 | 4,000 |
| CIBW-10058 | 10-16 x 5/8" | 2 | 5/16" | 24-12 gauge | 32 | 4,000 |
| CIBW-10034 | 10-16 x 3/4" | 3 | 5/16" | 24-12 gauge | 35 | 4,000 |
| CIBW-10100 | 10-16 x 1" | 3 | 5/16" | 24-12 gauge | 32 | 3,000 |
| CIBW-10114 | 10-16 x 1-1/4" | 3 | 5/16" | 24-12 gauge | 30 | 2,500 |
| CIBW-10112 | 10-16 x 1-1/2" | 3 | 5/16" | 24-12 gauge | 26 | 2,000 |
| CIBW-10200 | 10-16 x 2" | 3 | 5/16" | 24-12 gauge | 23 | 1,500 |
| CIBW-10300 | 10-16 x 3" | 3 | 5/16" | 24-12 gauge | 21 | 1,000 |
| CIBW-12034 | 12-14 x 3/4" | 3 | 5/16" | 20-12 gauge | 32 | 3,000 |
| CIBW-12100 | 12-14 x 1" | 3 | 5/16" | 20-12 gauge | 37 | 3,000 |
| CIBW-12114 | 12-14 x 1-1/4" | 3 | 5/16" | 20-12 gauge | 35 | 2,500 |
| CIBW-12112 | 12-14 x 1-1/2" | 3 | 5/16" | 20-12 gauge | 31 | 2,000 |
| CIBW-12200 | 12-14 x 2" | 3 | 5/16" | 20-12 gauge | 29 | 1,500 |
| CIBW-12212 | 12-14 x 2-1/2" | 3 | 5/16" | 20-12 gauge | 22 | 1,000 |
| CIBW-12300 | 12-14 x 3" | 3 | 5/16" | 20-12 gauge | 26 | 1,000 |
| CIBW-12400 | 12-14 x 4" | 3 | 5/16" | 20-12 gauge | 16 | 500 |
| CIBW-14034 | 14-14 x 3/4" | 3 | 3/8" | 18-8 gauge | 45 | 3,000 |
| CIBW-14100 | 14-14 x 1" | 3 | 3/8" | 18-8 gauge | 44 | 2,500 |
| CIBW-14114 | 14-14 x 1-1/4" | 3 | 3/8" | 18-8 gauge | 40 | 2,000 |
| CIBW-14112 | 14-14 x 1-1/2" | 3 | 3/8" | 18-8 gauge | 45 | 2,000 |
| CIBW-14134 | 14-14 x 1-3/4" | 3 | 3/8" | 18-8 gauge | 38 | 1,500 |
| CIBW-14200 | 14-14 x 2" | 3 | 3/8" | 18-8 gauge | 41 | 1,500 |
| CIBW-14212 | 14-14 x 2-1/2" | 3 | 3/8" | 18-8 gauge | 33 | 1,000 |
| CIBW-14300 | 14-14 x 3" | 3 | 3/8" | 18-8 gauge | 38 | 1,000 |
| CIBW-14400 | 14-14 x 4" | 3 | 3/8" | 18-8 gauge | 23 | 500 |
| CIBW-14500 | 14-14 x 5" | 3 | 3/8" | 18-8 gauge | 27 | 500 |

Sold in full case quantities only.

410 Stainless Steel Self-Drilling Screws

Hex Washer Head - Unslotted - Indented

Super Passivated and Waxed or Zinc Plated on Stainless



| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|------------|----------------------|-----------------|--------------|
| FOHHD-08012 | 8-18 x 1/2" | 2 | 1/4" | 22-15 gauge | 28 | 5,000 |
| FOHHD-08034 | 8-18 x 3/4" | 2 | 1/4" | 22-15 gauge | 23 | 5,000 |
| FOHHD-08100 | 8-18 x 1" | 2 | 1/4" | 22-15 gauge | 22 | 4,000 |
| FOHHD-10012 | 10-16 x 1/2" | 2 | 5/16" | 24-12 gauge | 26 | 5,000 |
| FOHHD-10034 | 10-16 x 3/4" | 3 | 5/16" | 24-12 gauge | 25 | 4,000 |
| FOHHD-10100 | 10-16 x 1" | 3 | 5/16" | 24-12 gauge | 24 | 3,000 |
| FOHHD-10200 | 10-16 x 2" | 3 | 5/16" | 24-12 gauge | 15 | 1,500 |
| FOHHD-10114 | 10-16 x 1-1/4" | 3 | 5/16" | 24-12 gauge | 23 | 2,500 |
| FOHHD-10112 | 10-16 x 1-1/2" | 3 | 5/16" | 24-12 gauge | 21 | 2,000 |
| FOHHD-10200 | 10-16 x 2" | 3 | 5/16" | 24-12 gauge | 15 | 1,500 |
| FOHHD-12034 | 12-14 x 3/4" | 3 | 5/16" | 20-12 gauge | 33 | 4,000 |
| FOHHD-12100 | 12-14 x 1" | 3 | 5/16" | 20-12 gauge | 30 | 3,000 |
| FOHHD-12114 | 12-14 x 1-1/4" | 3 | 5/16" | 20-12 gauge | 35 | 3,000 |
| FOHHD-12112 | 12-14 x 1-1/2" | 3 | 5/16" | 20-12 gauge | 33 | 2,500 |
| FOHHD-12200 | 12-14 x 2" | 3 | 5/16" | 20-12 gauge | 33 | 2,000 |
| FOHHD-12212 | 12-14 x 2-1/2" | 3 | 5/16" | 20-12 gauge | 18 | 1,000 |
| FOHHD-12300 | 12-14 x 3" | 3 | 5/16" | 20-12 gauge | 18 | 1,000 |
| FOHHD-12400 | 12-14 x 4" | 3 | 5/16" | 20-12 gauge | 19 | 1,000 |
| FOHHD-14034 | 14-14 x 3/4" | 3 | 3/8" | 18-8 gauge | 38 | 3,000 |
| FOHHD-14100 | 14-14 x 1" | 3 | 3/8" | 18-8 gauge | 38 | 2,500 |
| FOHHD-14114 | 14-14 x 1-1/4" | 3 | 3/8" | 18-8 gauge | 35 | 2,000 |
| FOHHD-14112 | 14-14 x 1-1/2" | 3 | 3/8" | 18-8 gauge | 30 | 1,500 |
| FOHHD-14200 | 14-14 x 2" | 3 | 3/8" | 18-8 gauge | 25 | 1,000 |
| FOHHD-14212 | 14-14 x 2-1/2" | 3 | 3/8" | 18-8 gauge | 24 | 800 |
| FOHHD-14300 | 14-14 x 3" | 3 | 3/8" | 18-8 gauge | 17 | 500 |
| FOHHD-14400 | 14-14 x 4" | 3 | 3/8" | 18-8 gauge | 22 | 500 |
| FOHHD-14500 | 14-14 x 5" | 3 | 3/8" | 18-8 gauge | 13 | 250 |
| FOHHD-14600 | 14-14 x 6" | 3 | 3/8" | 18-8 gauge | 16 | 250 |

**Special order items sold in full case quantities.*

410 Stainless Steel Self Drilling Screws with Bonded Washer



Hex Washer Head - Unslotted - Indented

Super Passivated & Waxed or Zinc Plated on Stainless
Assembled with Stainless Backed Bonded Neo-EPDM Washer

| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|------------|----------------------|-----------------|--------------|
| FOBW-10034 | 10-16 x 3/4" | 3 | 5/16" | 24-14 gauge | 35 | 4,000 |
| FOBW-10100 | 10-16 x 1" | 3 | 5/16" | 24-14 gauge | 31 | 3,000 |
| FOBW-10114 | 10-16 x 1-1/4" | 3 | 5/16" | 24-14 gauge | 30 | 2,500 |
| FOBW-10112 | 10-16 x 1-1/2" | 3 | 5/16" | 24-14 gauge | 26 | 2,000 |
| FOBW-10200 | 10-16 x 2" | 3 | 5/16" | 24-14 gauge | 22 | 1,500 |
| FOBW-12034 | 12-14 x 3/4" | 3 | 5/16" | 20-12 gauge | 32 | 3,000 |
| FOBW-12100 | 12-14 x 1" | 3 | 5/16" | 20-12 gauge | 37 | 3,000 |
| FOBW-12114 | 12-14 x 1-1/4" | 3 | 5/16" | 20-12 gauge | 35 | 2,500 |
| FOBW-12112 | 12-14 x 1-1/2" | 3 | 5/16" | 20-12 gauge | 39 | 2,500 |
| FOBW-12200 | 12-14 x 2" | 3 | 5/16" | 20-12 gauge | 28 | 1,500 |
| FOBW-12212 | 12-14 x 2-1/2" | 3 | 5/16" | 20-12 gauge | 22 | 1,000 |
| FOBW-12300 | 12-14 x 3" | 3 | 5/16" | 20-12 gauge | 21 | 1,000 |
| FOBW-12400 | 12-14 x 4" | 3 | 5/16" | 20-12 gauge | 23 | 1,000 |
| FOBW-14034 | 14-14 x 3/4" | 3 | 3/8" | 18-8 gauge | 45 | 3,000 |
| FOBW-14100 | 14-14 x 1" | 3 | 3/8" | 18-8 gauge | 44 | 2,500 |
| FOBW-14114 | 14-14 x 1-1/4" | 3 | 3/8" | 18-8 gauge | 40 | 2,000 |
| FOBW-14112 | 14-14 x 1-1/2" | 3 | 3/8" | 18-8 gauge | 34 | 1,500 |
| FOBW-14200 | 14-14 x 2" | 3 | 3/8" | 18-8 gauge | 28 | 1,000 |
| FOBW-14212 | 14-14 x 2-1/2" | 3 | 3/8" | 18-8 gauge | 26 | 800 |
| FOBW-14300 | 14-14 x 3" | 3 | 3/8" | 18-8 gauge | 18 | 500 |
| FOBW-14400 | 14-14 x 4" | 3 | 3/8" | 18-8 gauge | 22 | 500 |
| FOBW-14500 | 14-14 x 5" | 3 | 3/8" | 18-8 gauge | 14 | 250 |

**Special order items sold in full case quantities.*



ITW Buildex Tek[®] for Light Duty Applications

Hex Washer Head - Sharp Convex Point - Climaseal™
Exterior Coated



| Part Number | Size | Point | Drive | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|-------|----------------------|-----------------|--------------|
| BX-1196200 | 8-18 x 1/2" | 2 | 1/4" | 20-12 gauge | 35 | 10,000 |
| BX-1397000 | 10-16 x 1/2" | 3 | 5/16" | 20-7 gauge | 29 | 5,000 |
| BX-1127000 | 10-16 x 5/8" | 3 | 5/16" | 20-7 gauge | 32 | 5,000 |
| BX-1128000 | 10-16 x 3/4" | 3 | 5/16" | 20-7 gauge | 34 | 5,000 |
| BX-1129000 | 10-16 x 1" | 3 | 5/16" | 20-7 gauge | 41 | 5,000 |
| BX-1130000 | 10-16 x 1-1/4" | 3 | 5/16" | 20-7 gauge | 38 | 4,000 |
| BX-1131000 | 10-16 x 1-1/2" | 3 | 5/16" | 20-7 gauge | 33 | 3,000 |

25% upcharge for broken cases.

ITW Buildex Tek[®] for Medium Duty Applications

Hex Washer Head - Sharp Convex Point - Climaseal™
Exterior Coated



| Part Number | Size | Point | Drive | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|-----------------|-------|-------|----------------------|-----------------|--------------|
| BX-1087000 | 12-14 x 3/4" | 3 | 5/16" | 20-5 gauge | 42 | 5,000 |
| BX-1136000 | 12-14 x 1" | 3 | 5/16" | 20-5 gauge | 40 | 4,000 |
| BX-1120000 | 12-14 x 1-1/4" | 2 | 5/16" | 20-5 gauge | 46 | 4,000 |
| BX-1123000 | 12-14 x 1-1/2" | 2 | 5/16" | 20-5 gauge | 33 | 2,500 |
| BX-1140000 | 12-14 x 2" | 3 | 5/16" | 20-5 gauge | 34 | 2,000 |
| BX-1553000 | 12-14 x 2-1/2" | 3 | 5/16" | 20-5 gauge | 24 | 1,000 |
| BX-1143000 | 12-14 x 3" | 3 | 5/16" | 20-5 gauge | 23 | 1,000 |
| BX-1146000 | 12-14 x 4" | 3 | 5/16" | 20-5 gauge | 14 | 500 |
| BX-1147000 | 1/4-14 x 3/4" | 3 | 3/8" | 20-5 gauge | 38 | 3,000 |
| BX-1149000 | 1/4-14 x 1" | 3 | 3/8" | 20-5 gauge | 38 | 2,500 |
| BX-1150000 | 1/4-14 x 1-1/4" | 3 | 3/8" | 20-5 gauge | 34 | 2,000 |
| BX-1152000 | 1/4-14 x 1-1/2" | 3 | 3/8" | 20-5 gauge | 39 | 2,000 |
| BX-1155000 | 1/4-14 x 2" | 3 | 3/8" | 20-5 gauge | 37 | 1,500 |
| BX-1157000 | 1/4-14 x 3" | 3 | 3/8" | 20-5 gauge | 33 | 1,000 |
| BX-1304000 | 1/4-14 x 4" | 3 | 3/8" | 20-5 gauge | 21 | 500 |

25% upcharge for broken cases.

ITW Buildex Tek[®] for Heavy Duty Applications

Hex Washer Head - Notched Threads - Double Fluted Point

Climaseal Exterior Coated



| Part Number | Size | Point | Drive | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|-------|----------------------|-----------------|--------------|
| BX-1007000 | 12-24 x 1-1/4" | 5 | 5/16" | 20-5 gauge | 49 | 4,000 |
| BX-1770000 | 12-24 x 1-1/2" | 5.0 | 5/16" | 20-5 gauge | 37 | 2,500 |
| BX-1088000 | 12-24 x 7/8" | 4 | 5/16" | 1/8"-1/4" | 48 | 5,000 |
| BX-1414000 | 12-24 x 1-1/4" | 4.5 | 5/16" | 1/8"-3/8" | 52 | 4,000 |
| BX-1007000 | 12-24 x 1-1/4" | 5.0 | 5/16" | 1/8"-1/2" | 37 | 4,000 |
| BX-1070000 | 12-24 x 1-1/2" | 5 | 5/16" | 1/8"-1/2" | 36 | 2,500 |
| BX-1072000 | 12-24 x 2" | 5 | 5/16" | 1/8"-1/2" | 37 | 2,000 |
| BX-1074000 | 1/4-28 x 3" | 5 | 5/16" | 1/8"-1/2" | 34 | 1,000 |
| BX-1075000 | 1/4-28 x 4" | 5 | 5/16" | 1/8"-1/2" | 22 | 500 |
| BX-1641000 | 1/4-28 x 5" | 5 | 3/8" | 1/8"-1/2" | 15 | 250 |
| BX-1431000 | 1/4-28 x 6" | 5 | 3/8" | 1/8"-1/2" | 17 | 250 |
| BX-1590000 | 1/4-28 x 8" | 5 | 3/8" | 1/8"-1/2" | 13 | 150 |

25% upcharge for broken cases.

Visit www.itwbuildex.com for literature, technical information & training modules for ITWBuildex products.

ITW Buildex Wood-to-Metal- Tek[®] Self-Drilling Screws

Gray Spex™ Exterior Coated



| Part Number | Description | Point | Drive | Wood Attachment Range | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|---|-------|-------|-----------------------|----------------------|-----------------|--------------|
| BX-1079000 | 10-24 x 1" Wafer Head | 3 | #2 | 1/4"-1/2" | 20-7 gauge | 37 | 5,000 |
| BX-1791000 | 10-16 x 1-13/16" Phillips-Square Drive Flat Head | 3 | #2 | 1/4"-3/4" | 20-7 gauge | 25 | 2,500 |
| BX-1082000 | 10-24 x 1-7/16" Phillips Drive Flat Head w/ Wings | 3 | #2 | 1/4"-3/4" | 20-7 gauge | 29 | 3,000 |
| BX-1092000 | 12-24 x 2-1/4" Phillips Drive Flat Head w/ Wings | 4 | #3 | 3/4"-1 3/8" | 1/8"-1/4" | 38 | 2,000 |
| BX-1094000 | 12-24 x 2 3/4" Phillips Drive Flat Head w/ Wings | 4 | #3 | 3/4"-1 5/8" | 1/8"-1/4" | 32 | 1,500 |
| BX-1096000 | 1/4-20 x 3" Phillips Drive Flat Head w/ Wings | 4 | #3 | 3/4"-2" | 1/8"-1/4" | 29 | 1,000 |



ITW Buildex Tek[®] with Bonded Washers

Hex Washer Head - Climaseal™ Exterior Coated

Assembled with 9/16" EPDM Bonded Washer



| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|-----------------|-------|------------|----------------------|-----------------|--------------|
| BX-1005000 | 10-16 x 3/4" | 3 | 5/16" | 20-7 gauge | 30 | 3,000 |
| BX-1308000 | 10-16 x 1-1/2" | 3 | 5/16" | 20-7 gauge | 34 | 2,500 |
| BX-1009000 | 12-14 x 3/4" | 3 | 5/16" | 20-5 gauge | 32 | 3,000 |
| BX-1011000 | 12-14 x 1" | 3 | 5/16" | 20-5 gauge | 36 | 3,000 |
| BX-1404000 | 12-14 x 1-1/2" | 2 | 5/16" | 20-5 gauge | 30 | 2,000 |
| BX-1016000 | 12-14 x 2" | 3 | 5/16" | 20-5 gauge | 28 | 1,500 |
| BX-1333000 | 12-14 x 3" | 3 | 5/16" | 20-5 gauge | 26 | 1,000 |
| BX-1160000 | 1/4-14 x 1" | 3 | 3/8" | 20-5 gauge | 44 | 2,500 |
| BX-1019000 | 1/4-14 x 1-1/4" | 3 | 3/8" | 20-5 gauge | 41 | 2,000 |
| BX-1021000 | 1/4-14 x 2" | 3 | 3/8" | 20-5 gauge | 27 | 1,000 |

ITW Buildex Tek[®] with Bonded Washers

Hex Washer Head - Notched Threads - Double Fluted Point

Climaseal™ Exterior Coated - Assembled with 9/16" EPDM Bonded Washer



| Part Number | Size | Point | Drive Size | Drill & Tap Capacity | Weight Per Case | Qty Per Case |
|-------------|----------------|-------|------------|----------------------|-----------------|--------------|
| BX-1010000 | 12-24 x 7/8" | 4 | 5/16" | 1/8"-1/4" | 34 | 3,000 |
| BX-1415000 | 12-24 x 1-1/4" | 4.5 | 5/16" | 1/8"-3/8" | 39 | 2,500 |
| BX-1000000 | 12-24 x 1-1/4" | 5 | 5/16" | 1/8"-1/2" | 36 | 2,500 |
| BX-1607000 | 12-24 x 1/4" | 5.0 | 5/16" | 1/8"-1/2" | 37 | 2,500 |
| BX-1001000 | 12-24 x 1-1/2" | 5 | 5/16" | 1/8"-1/2" | 33 | 2,000 |
| BX-1670000 | 12-24 x 1-1/2" | 5.0 | 5/16" | 1/8"-1/2" | 34 | 2,000 |
| BX-1002000 | 12-24 x 2" | 5 | 5/16" | 1/8"-1/2" | 33 | 1,500 |
| BX-1003000 | 1/4-28 x 3" | 5 | 5/16" | 1/8"-1/2" | 35 | 1,000 |
| BX-1004000 | 1/4-28 x 4" | 5 | 5/16" | 1/8"-1/2" | 18 | 500 |
| BX-1647000* | 1/4-28 x 5" | 5 | 3/8" | 1/8"-1/2" | 16 | 250 |
| BX-1619000* | 1/4-28 x 8" | 5 | 3/8" | 1/8"-1/2" | 14 | 150 |

*3/4" EPDM Bonded Washer

25% upcharge for broken cases.

Visit www.itwbuildex.com for literature, technical information & training modules for ITWBuildex products.

Quality Drywall Screws

Coarse Thread - Bugle Head - #2 Phillips Drive

Black Phosphate - Sharp Point For Attaching to Interior Wood



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| IFDWC-06100 | 6 x 1" | #2 Phillips | 29 | 10,000 |
| IFDWC-06118 | 6 x 1-1/8" | #2 Phillips | 32 | 10,000 |
| IFDWC-06114 | 6 x 1-1/4" | #2 Phillips | 30 | 8,000 |
| IFDWC-06158 | 6 x 1-5/8" | #2 Phillips | 22 | 5,000 |
| IFDWC-07200 | 7 x 2" | #2 Phillips | 21 | 3,500 |
| IFDWC-07214 | 7 x 2-1/4" | #2 Phillips | 20 | 3,000 |
| IFDWC-08212 | 8 x 2-1/2" | #2 Phillips | 19 | 2,500 |
| IFDWC-08300 | 8 x 3" | #2 Phillips | 21 | 2,000 |
| IFDWC-10400 | 10 x 4" | #2 Phillips | 24 | 1,000 |

Quality Drywall Screws

Fine Thread - Bugle Head - #2 Phillips Drive

Black Phosphate - Sharp Point For Attaching to Light Gauge Metal (25-20 gauge)



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| IFDWS-06100 | 6 x 1" | #2 Phillips | 29 | 10,000 |
| IFDWS-06118 | 6 x 1-1/8" | #2 Phillips | 32 | 10,000 |
| IFDWS-06114 | 6 x 1-1/4" | #2 Phillips | 30 | 8,000 |
| IFDWS-06158 | 6 x 1-5/8" | #2 Phillips | 22 | 5,000 |
| IFDWS-06200 | 6 x 2" | #2 Phillips | 22 | 3,500 |
| IFDWS-07214 | 7 x 2-1/4" | #2 Phillips | 20 | 3,000 |
| IFDWS-08212 | 8 x 2-1/2" | #2 Phillips | 19 | 2,500 |
| IFDWS-08300 | 8 x 3" | #2 Phillips | 21 | 2,000 |



Economy Drywall Screws

Coarse Thread - Bugle Head - #2 Phillips Drive

Black Phosphate - Sharp Point

For Attaching to Interior Wood



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| CIDWC-06100 | 6 x 1" | #2 Phillips | 30 | 10,000 |
| CIDWC-06118 | 6 x 1-1/8" | #2 Phillips | 33 | 10,000 |
| CIDWC-06114 | 6 x 1-1/4" | #2 Phillips | 29 | 8,000 |
| CIDWC-06158 | 6 x 1-5/8" | #2 Phillips | 22 | 5,000 |
| CIDWC-06200 | 6 x 2" | #2 Phillips | 19 | 3,500 |
| CIDWC-06214 | 6 x 2-1/4" | #2 Phillips | 18 | 3,000 |
| CIDWC-08212 | 8 x 2-1/2" | #2 Phillips | 22 | 2,500 |
| CIDWC-08300 | 8 x 3" | #2 Phillips | 21 | 2,000 |

Economy Drywall Screws

Fine Thread - Bugle Head - #2 Phillips Drive

Black Phosphate - Sharp Point

For Attaching to Light Gauge Metal (25-20 gauge)



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| CIDWS-06100 | 6 x 1" | #2 Phillips | 30 | 10,000 |
| CIDWS-06118 | 6 x 1-1/8" | #2 Phillips | 33 | 10,000 |
| CIDWS-06114 | 6 x 1-1/4" | #2 Phillips | 28 | 8,000 |
| CIDWS-06158 | 6 x 1-5/8" | #2 Phillips | 22 | 5,000 |
| CIDWS-06200 | 6 x 2" | #2 Phillips | 19 | 3,500 |
| CIDWS-06214 | 6 x 2-1/4" | #2 Phillips | 18 | 3,000 |
| CIDWS-08212 | 8 x 2-1/2" | #2 Phillips | 22 | 2,500 |
| CIDWS-08300 | 8 x 3" | #2 Phillips | 21 | 2,000 |



Self-Drilling Drywall Screws



Bugle Head - #2 Phillips Drive - Zinc Plated - Drill Point

For Attaching to 20-16 Gauge Metal

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| CIBDZ-06114 | 6 x 1-1/4" | #2 Phillips | 32 | 8,000 |
| CIBDZ-06158 | 6 x 1-5/8" | #2 Phillips | 25 | 5,000 |
| CIBDZ-06178 | 6 x 1-7/8" | #2 Phillips | 23 | 4,000 |
| CIBDZ-08238 | 8 x 2-3/8" | #2 Phillips | 24 | 2,500 |
| CIBDZ-08258 | 8 x 2-5/8" | #2 Phillips | 22 | 2,000 |
| CIBDZ-08300 | 8 x 3" | #2 Phillips | 24 | 2,000 |
| CIBDZ-10400 | 10 x 4" | #2 Phillips | 20 | 1,000 |
| CIBDZ-10500 | 10 x 5" | #2 Phillips | 20 | 500 |

Wall Panel Screws



Bugle Head - #2 Phillips Drive - Ceramic Coated - Drill Point

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|-------------|-------------|-----------------|--------------|
| IFWP-06158 | 6 x 1-5/8" | #2 Phillips | 5 | 1,000 |
| IFWP-06200 | 6 x 2" | #2 Phillips | 7 | 1,000 |
| IFWP-08212 | 8 x 2-1/2" | #2 Phillips | 10 | 1,000 |
| IFWP-08300 | 8 x 3" | #2 Phillips | 12 | 1,000 |
| IFWP-10312 | 10 x 3-1/2" | #2 Phillips | 18 | 1,000 |
| IFWP-10400 | 10 x 4" | #2 Phillips | 21 | 1,000 |
| IFWP-10412 | 10 x 4-1/2" | #2 Phillips | 24 | 1,000 |
| IFWP-10512 | 10 x 5-1/2" | #2 Phillips | 28 | 1,000 |
| IFWP-10600 | 10 x 6" | #2 Phillips | 31 | 1,000 |

*Sold in full case quantities only.

Lath & Plaster Washer - Galvanized for #6 - #10 Screws 

| Part Number | Size | Weight Per Case | Qty Per Case |
|-----------------|--------|-----------------|--------------|
| TFW-GPPW-L-1250 | 1-1/4" | 7 | 1,000 |



Prong Washer - Black - Plastic 

| Part Number | Size | Weight Per Case | Qty Per Case |
|--------------|------|-----------------|--------------|
| TFW-TGP-2000 | 2" | 9 | 1,000 |



Long Length Drywall Screws

Bugle Head - #2 Phillips Drive - Black Phosphate

Black Phosphate - Sharp Point

Sharp Point - Coarse Thread



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|-------------|-------------|-----------------|--------------|
| CIDWC-10312 | 10 x 3-1/2" | #2 Phillips | 18 | 1,000 |
| CIDWC-10400 | 10 x 4" | #2 Phillips | 17 | 800 |
| CIDWC-10412 | 10 x 4-1/2" | #2 Phillips | 12 | 500 |
| CIDWC-10500 | 10 x 5" | #2 Phillips | 14 | 500 |
| CIDWC-10600 | 10 x 6" | #2 Phillips | 16 | 500 |

High and Low Thread Screws

Bugle Head - #2 Phillips Drive - Black Phosphate - Sharp Point



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| CIDHL-06100 | 6 x 1" | #2 Phillips | 30 | 10,000 |
| CIDHL-06114 | 6 x 1-1/4" | #2 Phillips | 30 | 8,000 |
| CIDHL-06158 | 6 x 1-5/8" | #2 Phillips | 22 | 5,000 |
| CIDHL-06200 | 6 x 2" | #2 Phillips | 19 | 3,500 |
| CIDHL-06214 | 6 x 2-1/4" | #2 Phillips | 18 | 3,000 |
| CIDHL-08212 | 8 x 2-1/2" | #2 Phillips | 22 | 2,500 |
| CIDHL-08300 | 8 x 3" | #2 Phillips | 20 | 2,000 |

Particle Board Screws

Flat Head - #2 Phillips Drive - Deep Thread with Nibs

Zinc Plated - Type 17 Point



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------------|-----------------|--------------|
| CIPAB-08100 | 8 x 1" | #2 Phillips | 40 | 10,000 |
| CIPAB-08114 | 8 x 1-1/4" | #2 Phillips | 35 | 8,000 |
| CIPAB-08112 | 8 x 1-1/2" | #2 Phillips | 33 | 6,000 |
| CIPAB-08158 | 8 x 1-5/8" | #2 Phillips | 25 | 5,000 |
| CIPAB-08200 | 8 x 2" | #2 Phillips | 23 | 3,500 |
| CIPAB-09212 | 9 x 2-1/2" | #2 Phillips | 23 | 2,500 |
| CIPAB-09300 | 9 x 3" | #2 Phillips | 22 | 2,000 |



Rock-On Cement Board Screws

Ribbed Wafer Head - #2 Phillips Drive - Coated
Hi-Lo® Thread - "S" Point



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|---------------|------------|-------|-----------------|--------------|
| CICBCHL-08114 | 8 x 1-1/4" | #2 | 31 | 5,000 |
| CICBCHL-08158 | 8 x 1-5/8" | #2 | 30 | 4,000 |
| CICBCHL-08214 | 8 x 2-1/4" | #2 | 25 | 2,000 |
| IFCBGHL-08238 | 8 x 2-3/8" | #2 | 30 | 3,000 |

Ribbed Wafer Head - #2 Phillips Drive Point - Climacoat™ Coated
S-12 Drill Point



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------|-----------------|--------------|
| BX-2156500 | 8 x 1-1/4" | #2 | 29 | 5,000 |
| BX-2159500 | 8 x 1-5/8" | #2 | 29 | 4,000 |

Dec-King™ Deck Screws

Climacoat™ Coated - Bugle Head - #2 Phillips Drive
Sharp Point - Coarse Thread



| Phillips Drive Part Number | Square Drive Part Number | Drive | Size | Weight Per Case | Qty Per Case |
|----------------------------|--------------------------|-------|-------------|-----------------|--------------|
| BX-2176500 | | #2 | 6 x 1-1/4" | 31 | 8,000 |
| BX-2136500 | | #2 | 6 x 1-5/8" | 25 | 5,000 |
| BX-2138500 | | #2 | 7 x 2" | 24 | 3,500 |
| BX-2140500 | BX-2180500 | #2 | 8 x 2-1/2" | 24 | 2,500 |
| BX-2141500 | BX-2181500 | #2 | 8 x 3" | 24 | 2,000 |
| BX-2142500 | BX-2182500 | #2 | 10 x 3-1/2" | 19 | 1,000 |

Stainless Steel Deck Screws

305 Stainless Steel - Bugle Head
Type 17 Point - Coarse Thread



| Part Number | Drive | Size | Weight Per Case | Qty Per Case |
|-------------|-------|-------------|-----------------|--------------|
| CISSD-08114 | T-20 | 8 x 1-1/4" | 23 | 5,000 |
| CISSD-08158 | T-20 | 8 x 1-5/8" | 23 | 4,000 |
| CISSD-08200 | T-20 | 8 x 2" | 22 | 3,000 |
| CISSD-10212 | T-25 | 10 x 2-1/2" | 24 | 2,000 |
| CISSD-10300 | T-25 | 10 x 3" | 22 | 1,500 |
| CISSD-10312 | T-25 | 10 x 3-1/2" | 17 | 1,000 |

Star Drive Yellow Zinc Screws



True Flat Head with Cutting Nibs - Star (6 Lobe) Drive - Deep, Wide, Sharp Thread

Type 17 Notched Extra Sharp Point - Knurled Shoulder Yellow Zinc Coating

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|-------------|-------|-----------------|--------------|
| WBYTX-08100 | 8 x 1" | T-20 | 36 | 10,000 |
| WBYTX-08114 | 8 x 1-1/4" | T-20 | 37 | 9,000 |
| WBYTX-08112 | 8 x 1-1/2" | T-20 | 34 | 6,500 |
| WBYTX-08134 | 8 x 1-3/4" | T-20 | 23 | 4,000 |
| WBYTX-08200 | 8 x 2" | T-20 | 23 | 3,500 |
| WBYTX-08212 | 8 x 2-1/2" | T-20 | 21 | 2,500 |
| WBYTX-09200 | 9 x 2" | T-25 | 26 | 3,000 |
| WBYTX-09212 | 9 x 2-1/2" | T-25 | 27 | 2,500 |
| WBYTX-09234 | 9 x 2-3/4" | T-25 | 23 | 2,000 |
| WBYTX-09300 | 9 x 3" | T-25 | 25 | 2,000 |
| WBYTX-09318 | 9 x 3-1/8" | T-25 | 24 | 1,800 |
| WBYTX-10112 | 10 x 1-1/2" | T-25 | 23 | 3,000 |
| WBYTX-10200 | 10 x 2" | T-25 | 26 | 2,500 |
| WBYTX-10212 | 10 x 2-1/2" | T-25 | 26 | 2,000 |
| WBYTX-10300 | 10 x 3" | T-25 | 23 | 1,500 |
| WBYTX-10318 | 10 x 3-1/8" | T-25 | 24 | 1,500 |
| WBYTX-10312 | 10 x 3-1/2" | T-25 | 18 | 1,000 |
| WBYTX-10400 | 10 x 4" | T-25 | 20 | 1,000 |
| WBYTX-10500 | 10 x 5" | T-25 | 19 | 750 |
| WBYTX-10600 | 10 x 6" | T-25 | 18 | 600 |

***Screws that are zinc plated may rust and cause streaking and/or staining in some exterior applications. Do not use if streaking or staining is unacceptable. Sold in full case quantities only.*



Star Drive Deck Screws



True Flat Head with Cutting Nibs - Star (6 Lobe) Drive - Deep, Wide, Sharp Thread

Type 17 Notched Extra Sharp Point - Knurled Shoulder

1200-Hour Bronze Triple Ceramic Exterior Coating - Compatible with Pressure Treated Lumber

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|-------------|-------|-----------------|--------------|
| WBBTX-08114 | 8 x 1-1/4" | T-20 | 40 | 9,000 |
| WBBTX-08112 | 8 x 1-1/2" | T-20 | 33 | 6,500 |
| WBBTX-08134 | 8 x 1-3/4" | T-20 | 24 | 4,000 |
| WBBTX-08200 | 8 x 2" | T-20 | 24 | 3,500 |
| WBBTX-09112 | 9 x 1-1/2" | T-25 | 24 | 3,500 |
| WBBTX-09200 | 9 x 2" | T-25 | 26 | 3,000 |
| WBBTX-09212 | 9 x 2-1/2" | T-25 | 27 | 2,500 |
| WBBTX-09234 | 9 x 2-3/4" | T-25 | 24 | 2,000 |
| WBBTX-09300 | 9 x 3" | T-25 | 25 | 2,000 |
| WBBTX-09318 | 9 x 3-1/8" | T-25 | 25 | 1,800 |
| WBBTX-10200 | 10 x 2" | T-25 | 26 | 2,500 |
| WBBTX-10212 | 10 x 2-1/2" | T-25 | 26 | 2,000 |
| WBBTX-10300 | 10 x 3" | T-25 | 23 | 1,500 |
| WBBTX-10312 | 10 x 3-1/2" | T-25 | 18 | 1,000 |
| WBBTX-10400 | 10 x 4" | T-25 | 21 | 1,000 |
| WBBTX-10500 | 10 x 5" | T-25 | 20 | 750 |
| WBBTX-10600 | 10 x 6" | T-25 | 18 | 600 |
| WBBTX-14500 | 14 X 5" | T-30 | 17 | 500 |
| WBBTX-14600 | 14 X 6" | T-30 | 21 | 500 |
| WBBTX-14700 | 14 X 7" | T-30 | 24 | 500 |
| WBBTX-14800 | 14 X 8" | T-30 | 28 | 500 |

Sold in full case quantities only.

Star Drive Trim Head Screws



True Flat with Cutting Nibs - #20 Star (6 Lobe) Drive - Deep, Wide, Sharp Thread

Type 17 Notched Extra Sharp Point - Knurled Shoulder

1200-Hour Bronze Triple Ceramic Exterior Coating - Compatible with Pressure Treated Lumber

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------|-----------------|--------------|
| WBTHB-09158 | 9 x 1-5/8" | T-20 | 25 | 4,000 |
| WBTHB-09200 | 9 x 2" | T-20 | 23 | 3,000 |
| WBTHB-09212 | 9 x 2-1/2" | T-20 | 24 | 2,500 |
| WBTHB-09300 | 9 x 3" | T-20 | 22 | 2,000 |
| WBTHB-09400 | 9 x 4" | T-20 | 23 | 1,500 |
| WBTHB-09500 | 9 x 5" | T-20 | 21 | 1,000 |
| WBTHB-09600 | 9 X 6" | T-20 | 15 | 1,000 |

Sold in full case quantities only.

Star Drive Stainless Screws



True Flat Head with Cutting Nibs - Star (6 Lobe) Drive - Deep, Wide, Sharp Thread
Type 17 Notched Point - 305 Stainless

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|-------------|-------|-----------------|--------------|
| WBSTX-08114 | 8 x 1-1/4" | T-20 | 38 | 9,000 |
| WBSTX-08112 | 8 x 1-1/2" | T-20 | 33 | 6,500 |
| WBSTX-08200 | 8 x 2" | T-20 | 23 | 3,500 |
| WBSTX-09158 | 9 x 1-5/8" | T-25 | 26 | 4,000 |
| WBSTX-09200 | 9 x 2" | T-25 | 25 | 3,000 |
| WBSTX-09212 | 9 x 2-1/2" | T-25 | 25 | 2,500 |
| WBSTX-09300 | 9 x 3" | T-25 | 24 | 2,000 |
| WBSTX-10212 | 10 x 2-1/2" | T-25 | 24 | 2,000 |
| WBSTX-10300 | 10 x 3" | T-25 | 22 | 1,500 |
| WBSTX-10312 | 10 x 3-1/2" | T-25 | 17 | 1,000 |
| WBSTX-10400 | 10 x 4" | T-25 | 19 | 1,000 |

Sold in full case quantities only.

Star Drive Stainless Trim Head Screws



True Flat Head with Cutting Nibs - #20 Star (6 Lobe) Drive - Deep, Wide, Sharp Thread
Type 17 Notched Point - 305 Stainless

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------|-----------------|--------------|
| WBSTH-09158 | 9 x 1-5/8" | T-20 | 23 | 4,000 |
| WBSTH-09214 | 9 x 2-1/4" | T-20 | 20 | 2,500 |
| WBSTH-09212 | 9 x 2-1/2" | T-20 | 22 | 2,500 |
| WBSTH-09300 | 9 x 3" | T-20 | 22 | 2,000 |
| WBSTH-09400 | 9 x 4" | T-20 | 22 | 1,500 |

Sold in full case quantities only.

Star Drive Construction Lag Screws



Round Washer Head with Cutting Nibs - Star (6 Lobe) Drive

Type 17 Extra Sharp Point - Deep, Wide, Sharp Thread

1200-Hour Bronze Triple Ceramic Exterior Coated - Compatible with Pressure Treated Lumber

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|-------------|-------|-----------------|--------------|
| WBCTX-14100 | 14 x 1" | T-25 | 17 | 2,000 |
| WBCTX-14112 | 14 x 1-1/2" | T-25 | 17 | 1,500 |
| WBCTX-14200 | 14 x 2" | T-25 | 14 | 1,000 |
| WBCTX-14212 | 14 x 2-1/2" | T-25 | 13 | 750 |
| WBCTX-14300 | 14 x 3" | T-25 | 12 | 600 |
| WBCTX-14400 | 14 x 4" | T-25 | 14 | 500 |
| WBCTX-14500 | 14 x 5" | T-25 | 17 | 500 |
| WBCTX-14600 | 14 x 6" | T-25 | 16 | 400 |
| WBCTX-15200 | 15 x 2" | T-30 | 16 | 700 |
| WBCTX-15212 | 15 x 2-1/2" | T-30 | 16 | 600 |
| WBCTX-15300 | 15 x 3" | T-30 | 16 | 500 |
| WBCTX-15312 | 15 x 3-1/2" | T-30 | 18 | 500 |
| WBCTX-15400 | 15 x 4" | T-30 | 16 | 400 |
| WBCTX-15500 | 15 x 5" | T-30 | 17 | 350 |
| WBCTX-15600 | 15 x 6" | T-30 | 18 | 300 |
| WBCTX-17700 | 17 x 7" | T-40 | 21 | 250 |
| WBCTX-17800 | 17 x 8" | T-40 | 24 | 250 |
| WBCTX-17100 | 17 x 10" | T-40 | 30 | 250 |
| WBCTX-17160 | 17 x 16" | T-40 | 48 | 250 |
| WBCTX-17400 | 17 x 4" | T-40 | 19 | 350 |
| WBCTX-17500 | 17 x 5" | T-40 | 21 | 300 |
| WBCTX-17600 | 17 x 6" | T-40 | 20 | 250 |

Sold in full case quantities only.

Star Drive Finish Screws



T-10 Star Drive - Type 17 Set-Back Point - Knurled Shoulder

Strong, Extra-Small Finish Head - Yellow Zinc Coating

| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------|-----------------|--------------|
| WBFS-07114 | 7 x 1-1/4" | T-10 | 24 | 7,000 |
| WBFS-07158 | 7 x 1-5/8" | T-10 | 25 | 5,500 |
| WBFS-07200 | 7 x 2" | T-10 | 23 | 4,000 |
| WBFS-07212 | 7 x 2-1/2" | T-10 | 21 | 3,000 |
| WBFS-07300 | 7 x 3" | T-10 | 21 | 2,500 |

Sold in full case quantities only.



Features

- No pre-drilling required
- Code listings ICC-ES ESR-1782
- Low profile, large diameter head designs provide exceptional draw down of even rogue logs.
- Deep T-Star Drive provides superior bit engagement and allows for easy backout of the fastener if necessary when the head is countersunk.
- Patented thread serrations require up to 40% less driving torque to increase installation speed, while helping to prevent cracking in logs.
- Proprietary coating provides excellent corrosion resistance and prevents staining wet logs.
- Fastener length stamp on the head provides convenient identification without measuring and aids on-site inspections.
- German engineered thread technology; American made.

SPAX® Hex Washer Head



Zinc Coating- Interior Use

| PART NUMBER | Description | Drive Bit | Thread | Qty Per Case |
|-------------------|------------------------------|-----------|---------|--------------|
| SPX-4571010700505 | 1/4 x 2 PWR LAG HEX HEAD | 3/8 Hex | Full | 200 |
| SPX-4571010700755 | 1/4 x 3 PWR LAG HEX HEAD | 3/8 Hex | Full | 200 |
| SPX-4571010700905 | 1/4 x 3-1/2 PWR LAG HEX HEAD | 3/8 Hex | Full | 200 |
| SPX-4571010701005 | 1/4 x 4 PWR LAG HEX HEAD | 3/8 Hex | Partial | 200 |
| SPX-4571010701155 | 1/4 x 4-1/2 PWR LAG HEX HEAD | 3/8 Hex | Partial | 200 |
| SPX-4571010701275 | 1/4 x 5 PWR LAG HEX HEAD | 3/8 Hex | Partial | 200 |
| SPX-4571010701525 | 1/4 x 6 PWR LAG HEX HEAD | 3/8 Hex | Partial | 200 |
| SPX-4571010800755 | 5/16 x 3 PWR LAG HEX HEAD | 7/16 Hex | Full | 200 |
| SPX-4571010801005 | 5/16 x 4 PWR LAG HEX HEAD | 7/16 Hex | Partial | 200 |
| SPX-4571011001275 | 3/8 x 5 PWR LAG HEX HEAD | 1/2 Hex | Partial | 100 |
| SPX-4571011001525 | 3/8 x 6 PWR LAG HEX HEAD | 1/2 Hex | Partial | 100 |
| SPX-4571011201275 | 1/2 x 5 PWR LAG HEX HEAD | 5/8 Hex | Partial | 100 |
| SPX-4571011201525 | 1/2 x 6 PWR LAG HEX HEAD | 5/8 Hex | Partial | 100 |

Sold in full case quantities only.

SPAX® Hex Washer Head

High Corrosion Resistant (HCR)- Exterior Use



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Case |
|-------------------|-------------------------------|-----------|---------|--------------|
| SPX-4571820700505 | 1/4 x 2 PWR LAG HEX HEAD | 3/8 Hex | Full | 200 |
| SPX-4571820700755 | 1/4 x 3 PWR LAG HEX HEAD | 3/8 Hex | Full | 200 |
| SPX-4571820701275 | 1/4 x 5 PWR LAG HEX HEAD | 3/8 Hex | Partial | 200 |
| SPX-4571820701525 | 1/4 x 6 PWR LAG HEX HEAD | 3/8 Hex | Partial | 200 |
| SPX-4571820800755 | 5/16 x 3 PWR LAG HEX HEAD | 7/16 Hex | Full | 200 |
| SPX-4571820800905 | 5/16 x 3-1/2 PWR LAG HEX HEAD | 7/16 Hex | Full | 200 |
| SPX-4571820801005 | 5/16 x 4 PWR LAG HEX HEAD | 7/16 Hex | Partial | 200 |
| SPX-4571820801275 | 5/16 x 5 PWR LAG HEX HEAD | 7/16 Hex | Partial | 200 |
| SPX-4571821001275 | 3/8 x 5 PWR LAG HEX HEAD | 1/2 Hex | Partial | 100 |
| SPX-4571821001525 | 3/8 x 6 PWR LAG HEX HEAD | 1/2 Hex | Partial | 100 |
| SPX-4571821201275 | 1/2 x 5 PWR LAG HEX HEAD | 5/8 Hex | Partial | 100 |
| SPX-4571821201525 | 1/2 x 6 PWR LAG HEX HEAD | 5/8 Hex | Partial | 100 |

Sold in full case quantities only.

SPAX® Washer T-Star Drive - Flat Head

Yellow Zinc - Interior Use



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Case |
|-------------------|--------------------------|-----------|---------|--------------|
| SPX-4581020700635 | 1/4 x 2-1/2 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020700765 | 1/4 x 3 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020700905 | 1/4 x 3-1/2 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020701005 | 1/4 x 4 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020701555 | 1/4 x 4-1/2 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020701275 | 1/4 x 5 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020701525 | 1/4 x 6 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581020800765 | 5/16 x 3 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581020800905 | 5/16 x 3-1/2 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581020801005 | 5/16 x 4 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581020801155 | 5/16 x 4-1/2 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581021001275 | 3/8 x 5 PWR LAG BOX | T-50 | Partial | 100 |
| SPX-4581021001525 | 3/8 x 6 PWR LAG BOX | T-50 | Partial | 100 |

Sold in full case quantities only.

SPAX® Washer T-Star Drive - Flat Head

High Corrosion Resistant (HCR)- Exterior Use



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Case |
|-------------------|--------------------------|-----------|---------|--------------|
| SPX-4581820700635 | 1/4 x 2-1/2 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820700765 | 1/4 x 3 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820700905 | 1/4 x 3-1/2 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820701005 | 1/4 x 4 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820701555 | 1/4 x 4-1/2 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820701275 | 1/4 x 5 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820701525 | 1/4 x 6 PWR LAG BOX | T-30 | Partial | 200 |
| SPX-4581820800765 | 5/16 x 3 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581820800905 | 5/16 x 3-1/2 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581820801005 | 5/16 x 4 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581820801155 | 5/16 x 4-1/2 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581820801275 | 5/16 x 5 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581820801525 | 5/16 x 6 PWR LAG BOX | T-40 | Partial | 200 |
| SPX-4581820801715 | 5/16 x 6 3/4 PWR LAG BOX | T-40 | Partial | 100 |
| SPX-4581820802035 | 5/16 x 8 PWR LAG BOX | T-40 | Partial | 100 |
| SPX-4581820802545 | 5/16 x 10 PWR LAG BOX | T-40 | Partial | 100 |
| SPX-4581820803045 | 5/16 x 12 PWR LAG BOX | T-40 | Partial | 100 |
| SPX-4581821001275 | 3/8 x 5 PWR LAG BOX | T-50 | Partial | 100 |
| SPX-4581821001525 | 3/8 x 6 PWR LAG BOX | T-50 | Partial | 100 |

Sold in full case quantities only.

SPAX® Hex Washer Head - Bulk

Zinc Coating- Interior Use



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Pail |
|-------------------|--|-----------|---------|--------------|
| SPX-3571010700500 | 1/4 x 2 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Full | 500 |
| SPX-3571010700750 | 1/4 x 3 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Full | 500 |
| SPX-3571010700900 | 1/4 x 3-1/2 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Full | 500 |
| SPX-3571010701000 | 1/4 x 4 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Partial | 500 |
| SPX-3571010701150 | 1/4 x 4-1/2 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Partial | 500 |
| SPX-3571010701270 | 1/4 x 5 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Partial | 500 |
| SPX-3571010701520 | 1/4 x 6 PWR LAG HEX HEAD ZINC PAIL | 3/8 Hex | Partial | 500 |
| SPX-3571010800750 | 5/16 x 3 PWR LAG HEX HEAD ZINC PAIL | 7/16 Hex | Full | 250 |
| SPX-3571010801000 | 5/16 x 4 PWR LAG HEX HEAD ZINC PAIL | 7/16 Hex | Partial | 250 |
| SPX-3571011001270 | 3/8 x 5 PWR LAG HEX HEAD ZINC PAIL | 1/2 Hex | Partial | 150 |
| SPX-3571011001520 | 3/8 x 6 PWR LAG HEX HEAD ZINC PAIL | 1/2 Hex | Partial | 150 |
| SPX-3571011002030 | 3/8 x 8 PWRLAG HEX HEAD ZINC PAIL | 1/2 Hex | Partial | 150 |
| SPX-3571011201270 | 1/2 x 5 PWR LAG HEX HEAD ZINC PAIL | 5/8 Hex | Partial | 100 |
| SPX-3571011201520 | 1/2 x 6 PWR LAG HEX HEAD ZINC PAIL | 5/8 Hex | Partial | 100 |
| SPX-3571011202030 | 1/2 x 8 PWR LAG HEX HEAD ZINC PAIL | 5/8 Hex | Partial | 100 |
| SPX-3571011202540 | 1/2 x 10 PWR LAG HEX HEAD ZINC PAIL | 5/8 Hex | Partial | 100 |

Sold in full case quantities only.

SPAX® Hex Washer Head - Bulk

High Corrosion Resistant (HCR)- Exterior Use



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Pail |
|-------------------|--|-----------|---------|--------------|
| SPX-3571820700500 | 1/4 x 2 PWR LAG HEX HEAD HCR PAIL | 3/8 Hex | Full | 500 |
| SPX-3571820700750 | 1/4 x 3 PWR LAG HEX HEAD HCR PAIL | 3/8 Hex | Full | 500 |
| SPX-3571820701520 | 1/4 x 6 PWR LAG HEX HEAD HCR PAIL | 3/8 Hex | Partial | 500 |
| SPX-3571820800750 | 5/16 x 3 PWR LAG HEX HEAD HCR PAIL | 7/16 Hex | Full | 250 |
| SPX-3571820800900 | 5/16 x 3-1/2 PWR LAG HEX HEAD HCR PAIL | 7/16 Hex | Full | 250 |
| SPX-3571820801000 | 5/16 x 4 PWR LAG HEX HEAD HCR PAIL | 7/16 Hex | Partial | 250 |
| SPX-3571820801270 | 5/16 x 5-1/2 PWR LAG HEX HEAD HCR PAIL | 7/16 HEX | Partial | 250 |
| SPX-3571821001270 | 3/8 x 5 PWR LAG HEX HEAD HCR PAIL | 1/2 Hex | Partial | 150 |
| SPX-3571821001520 | 3/8 x 6 PWR LAG HEX HEAD HCR PAIL | 1/2 Hex | Partial | 150 |
| SPX-3571821201270 | 1/2 x 5 PWR LAG HEX HEAD HCR PAIL | 5/8 Hex | Partial | 100 |
| SPX-3571821201520 | 1/2 x 6 PWR LAG HEX HEAD PAIL HCR | 5/8 Hex | Partial | 100 |
| SPX-3571821202030 | 1/2 x 8 PWR LAG HEX HEAD PAIL HCR | 5/8 Hex | Partial | 100 |
| SPX-3571821202540 | 1/2 x 10 PWR LAG HEX HEAD PAIL HCR | 5/8 Hex | Partial | 100 |
| SPX-3571821203040 | 1/2 x 12 PWR LAG HEX HEAD PAIL HCR | 5/8 Hex | Partial | 100 |

Sold in full case quantities only.

SPAX® Washer T-Star Drive - Flat Head - Bulk

Yellow Zinc - Interior Use



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Pail |
|-------------------|--|-----------|---------|--------------|
| SPX-3581020700630 | 1/4 x 2-1/2 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020700760 | 1/4 x 3 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020700900 | 1/4 x 3-1/2 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020701000 | 1/4 x 4 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020701550 | 1/4 x 4-1/2 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020701270 | 1/4 x 5 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020701520 | 1/4 x 6 PWR LAG WASHER HEAD PAIL YZ | T-30 | Partial | 500 |
| SPX-3581020800600 | 5/16 x 2-3/8 PWR LAG WASHER HEAD PAIL YZ | T-40 | Partial | 500 |
| SPX-3581020800760 | 5/16 x 3 PWR LAG WASHER HEAD PAIL YZ | T-40 | Partial | 250 |
| SPX-3581020800900 | 5/16 x 3-1/2 PWR LAG WASHER HEAD PAIL YZ | T-40 | Partial | 250 |
| SPX-3581020801000 | 5/16 x 4 PWR LAG WASHER HEAD PAIL YZ | T-40 | Partial | 250 |
| SPX-3581020801150 | 5/16 x 4 1/2 PWR LAG WASHER HEAD PAIL YZ | T-40 | Partial | 250 |
| SPX-3581021001270 | 3/8 x 5 PWR LAG WASHER HEAD PAIL YZ | T-50 | Partial | 150 |
| SPX-3581021001520 | 3/8 x 6 PWR LAG WASHER HEAD PAIL YZ | T-50 | Partial | 150 |
| SPX-3581021002030 | 3/8 x 8 PWR LAG WASHER HEAD PAIL YZ | T-50 | Partial | 150 |
| SPX-3581021002540 | 3/8 x 10 PWR LAG WASHER HEAD PAIL YZ | T-50 | Partial | 150 |

Sold in full case quantities only.

SPAX® Washer T-Star Drive - Flat Head - Bulk

High Corrosion Resistant (HCR) - Exterior



| PART NUMBER | Description | Drive Bit | Thread | Qty Per Pail |
|-------------------|---|-----------|---------|--------------|
| SPX-3581820700630 | 1/4 x 2-1/2 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820700760 | 1/4 x 3 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820700900 | 1/4 x 3-1/2 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820701000 | 1/4 x 4 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820701550 | 1/4 x 4-1/2 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820701270 | 1/4 x 5 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820701520 | 1/4 x 6 PWR LAG WASHER HEAD PAIL HCR | T-30 | Partial | 500 |
| SPX-3581820800760 | 5/16 x 3 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820800900 | 5/16 x 3-1/2 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820801000 | 5/16 x 4 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820801150 | 5/16 x 4-1/2 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820801270 | 5/16 x 5 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820801520 | 5/16 x 6 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820801710 | 5/16 X 6-3/4 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 250 |
| SPX-3581820802030 | 5/16 x 8 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 150 |
| SPX-3581820802540 | 5/16 x 10 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 150 |
| SPX-3581820803040 | 5/16 x 12 PWR LAG WASHER HEAD PAIL HCR | T-40 | Partial | 150 |
| SPX-3581821001270 | 3/8 x 5 PWR LAG WASHER HEAD PAIL HCR | T-50 | Partial | 150 |
| SPX-3581821001520 | 3/8 x 6 PWR LAG WASHER HEAD PAIL HCR | T-50 | Partial | 150 |
| SPX-3581821002030 | 3/8 x 8 PWR LAG WASHER HEAD PAIL HCR | T-50 | Partial | 150 |
| SPX-3581821002540 | 3/8 x 10 PWR LAG WASHER HEAD PAIL HCR | T-50 | Partial | 150 |

Sold in full case quantities only.

SPAX[®] Multi-Material UNIDRIVE - Zinc

UNIDRIVE (Phillips and Square), Flat Head, Full Thread, Zinc



| Part Number | Size | Description | Drive | | Qty Per Pail |
|-------------------|-------------|------------------------------|------------|----------|--------------|
| | | | Phillips # | Square # | |
| SPX-4101010350164 | 6 x 5/8" | Flat Head, Full Thread, Zinc | 2 | 1 | 2,825 |
| SPX-4101010350204 | 6 x 3/4" | Flat Head, Full Thread, Zinc | 2 | 1 | 2,330 |
| SPX-4101010350254 | 6 x 1" | Flat Head, Full Thread, Zinc | 2 | 1 | 1,920 |
| SPX-4101010350324 | 6 x 1-1/4" | Flat Head, Full Thread, Zinc | 2 | 1 | 1,625 |
| SPX-4101010350404 | 6 x 1-1/2" | Flat Head, Full Thread, Zinc | 2 | 1 | 1,415 |
| SPX-4101010400164 | 8 x 5/8" | Flat Head, Full Thread, Zinc | 2 | 2 | 2,025 |
| SPX-4101010400204 | 8 x 3/4" | Flat Head, Full Thread, Zinc | 2 | 2 | 1,750 |
| SPX-4101010400324 | 8 x 1-1/4" | Flat Head, Full Thread, Zinc | 2 | 2 | 1,200 |
| SPX-4101010400404 | 8 x 1-1/2" | Flat Head, Full Thread, Zinc | 2 | 2 | 985 |
| SPX-4101010400504 | 8 x 2" | Flat Head, Full Thread, Zinc | 2 | 2 | 805 |
| SPX-4101010400604 | 8 x 2-1/2" | Flat Head, Full Thread, Zinc | 2 | 2 | 665 |
| SPX-4101010500404 | 10 x 1-1/2" | Flat Head, Full Thread, Zinc | 2 | 2 | 650 |
| SPX-4101010500504 | 10 x 2" | Flat Head, Full Thread, Zinc | 2 | 2 | 525 |
| SPX-4101010500604 | 10 x 2-1/2" | Flat Head, Full Thread, Zinc | 2 | 2 | 440 |
| SPX-4101010500754 | 10 x 3" | Flat Head, Full Thread, Zinc | 2 | 2 | 360 |
| SPX-4101010500904 | 10 x 3-1/2" | Flat Head, Full Thread, Zinc | 2 | 2 | 285 |

Sold in full case quantities only.



SPAX® Multi-Material UNIDRIVE - Yellow Zinc

UNIDRIVE (Phillips and Square), Flat Head, Full Thread, Yellow Zinc



| Part Number | Size | Description | Drive | | Qty Per Pail |
|-------------------|-------------|-------------------------------------|------------|----------|--------------|
| | | | Phillips # | Square # | |
| SPX-4101020400404 | 8 x 1-1/2" | Flat Head, Full Thread, Yellow Zinc | 2 | 2 | 985 |
| SPX-4101020400504 | 8 x 2" | Flat Head, Full Thread, Yellow Zinc | 2 | 2 | 805 |
| SPX-4101020400604 | 8 x 2-1/2" | Flat Head, Full Thread, Yellow Zinc | 2 | 2 | 665 |
| SPX-4101020500504 | 10 x 2" | Flat Head, Full Thread, Yellow Zinc | 2 | 2 | 525 |
| SPX-4101020500604 | 10 x 2-1/2" | Flat Head, Full Thread, Yellow Zinc | 2 | 2 | 440 |
| SPX-4101020500754 | 10 x 3" | Flat Head, Full Thread, Yellow Zinc | 2 | 2 | 360 |

Sold in full case quantities only.

SPAX® Multi-Material UNIDRIVE - Zinc

UNIDRIVE (Phillips and Square), Pan Head, Full Thread, Zinc



| Part Number | Size | Description | Drive | | Qty Per Pail |
|-------------------|------------|-----------------------------|------------|----------|--------------|
| | | | Phillips # | Square # | |
| SPX-4111010350134 | 6 x 1/2" | Pan Head, Full Thread, Zinc | 2 | 1 | 2,500 |
| SPX-4111010350164 | 6 x 5/8" | Pan Head, Full Thread, Zinc | 2 | 1 | 2,225 |
| SPX-4111010350204 | 6 x 3/4" | Pan Head, Full Thread, Zinc | 2 | 1 | 2,000 |
| SPX-4111010400164 | 8 x 5/8" | Pan Head, Full Thread, Zinc | 2 | 2 | 1,600 |
| SPX-4111010400204 | 8 x 3/4" | Pan Head, Full Thread, Zinc | 2 | 2 | 1,400 |
| SPX-4111010400254 | 8 x 1" | Pan Head, Full Thread, Zinc | 2 | 2 | 1,125 |
| SPX-4111010400324 | 8 x 1-1/4" | Pan Head, Full Thread, Zinc | 2 | 2 | 1,000 |
| SPX-4111010400404 | 8 x 1-1/2" | Pan Head, Full Thread, Zinc | 2 | 2 | 900 |
| SPX-4111010400504 | 8 x 2" | Pan Head, Full Thread, Zinc | 2 | 2 | 700 |
| SPX-4111010500164 | 10 x 5/8" | Pan Head, Full Thread, Zinc | 2 | 2 | 875 |
| SPX-4111010500204 | 10 x 3/4" | Pan Head, Full Thread, Zinc | 2 | 2 | 800 |
| SPX-4111010500254 | 10 x 1" | Pan Head, Full Thread, Zinc | 2 | 2 | 675 |

Sold in full case quantities only.



SPAX® Multi-Material T-Star Plus

T-Star Drive, Flat Head, Partial Thread, Yellow Zinc



| Part Number | Size | Description | Drive | Qty Per Pail |
|-------------------|-------------|---|-------|--------------|
| SPX-4191020400324 | 8 x 1-1/4" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 1,200 |
| SPX-4191020400404 | 8 x 1-1/2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 985 |
| SPX-4191020400504 | 8 x 2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 805 |
| SPX-4191020400604 | 8 x 2-1/2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 665 |
| SPX-4191020450604 | 9 x 2-1/2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 580 |
| SPX-4191020450804 | 9 x 3-1/4" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 445 |
| SPX-4191020500404 | 10 x 1-1/2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 665 |
| SPX-4191020500504 | 10 x 2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 535 |
| SPX-4191020500604 | 10 x 2-1/2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 435 |
| SPX-4191020500754 | 10 x 3" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 360 |
| SPX-4191020500904 | 10 x 3-1/2" | Flat Head, Partial Thread, Yellow Zinc, T-Star Plus | T-20 | 285 |

Sold in full case quantities only.

SPAX® Exterior/ Deck Screws



T-Star Drive, Flat Head, Partial Thread, Zinc Nickel, HCR X-Coated

| Part Number | Size | Description | Drive | Qty Per Pail |
|-------------------|-------------|---|-------|--------------|
| SPX-3191670400600 | 8 x 2-1/2" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-20 | 1,500 |
| SPX-3191670450600 | 9 x 2-1/2" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-20 | 1,500 |
| SPX-3191670450800 | 9 x 3-1/4" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-20 | 1,500 |
| SPX-3191670500600 | 10 x 2-1/2" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-20 | 1,500 |
| SPX-3191670500750 | 10 x 3" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-20 | 1,500 |
| SPX-3191670500900 | 10 x 3-1/2" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-20 | 1,500 |
| SPX-3191670600600 | 14 x 2-1/2" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-30 | 1,000 |
| SPX-3191670600750 | 14 x 3" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-30 | 1,000 |
| SPX-3191670600900 | 14 x 3-1/2" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-30 | 1,000 |
| SPX-3191670601000 | 14 x 4" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-30 | 1,000 |
| SPX-3191670601200 | 14 x 3-3/4" | Flat Head, Partial Thread, Zinc Nickel, T-Star Plus | T-30 | 750 |

Sold in full case quantities only.

Modified Truss Head

Zinc Plated - Sharp Point - Fine Thread - #2 Phillips Drive



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------|-----------------|--------------|
| CIMTS-08916 | 8 x 9/16" | #2 | 37 | 10,000 |
| CIMTS-08012 | 8 X 1/2" | #2 | 35 | 10,000 |
| CIMTS-08034 | 8 x 3/4" | #2 | 37 | 8,000 |
| CIMTS-08100 | 8 x 1" | #2 | 27 | 5,000 |
| CIMTS-08114 | 8 x 1-1/4" | #2 | 32 | 5,000 |
| CIMTS-08158 | 8 x 1-5/8" | #2 | 34 | 4,000 |
| CIMTS-08178 | 8 x 1-7/8" | #2 | 23 | 2,500 |
| CIMTS-08212 | 8 x 2-1/2" | #2 | 21 | 2,000 |
| CIMTS-08300 | 8 x 3" | #2 | 20 | 1,500 |

Modified Truss Head

Zinc Plated - #2 Phillips - Self Drill Point

For attaching to Light Gauge Metal (25-20 Gauge)



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|-------------|------------|-------|-----------------|--------------|
| CIMTD-08012 | 8 x 1/2" | #2 | 37 | 10,000 |
| CIMTD-08034 | 8 x 3/4" | #2 | 37 | 8,000 |
| CIMTD-08100 | 8 x 1" | #2 | 28 | 5,000 |
| CIMTD-08114 | 8 x 1-1/4" | #2 | 34 | 5,000 |
| CIMTD-08158 | 8 x 1-5/8" | #2 | 32 | 4,000 |
| CIMTD-08178 | 8 x 1-7/8" | #2 | 18 | 2,000 |
| CIMTD-08212 | 8 x 2-1/2" | #2 | 23 | 2,000 |
| CIMTD-08300 | 8 x 3" | #2 | 20 | 1,500 |

Self Piercing Screws

Hex Washer Head - Slotted - Zinc Plated - Sharp Point



| Part Number | Size | Drive | Weight Per Case | Qty Per Case |
|--------------|-------------|-------|-----------------|--------------|
| CIHHS-08012 | 8 x 1/2" | 1/4" | 50 | 15,000 |
| CIHHS-08034 | 8 x 3/4" | 1/4" | 40 | 10,000 |
| CIHHS-08100 | 8 x 1" | 1/4" | 40 | 8,000 |
| CIHHS-08112 | 8 x 1-1/2" | 1/4" | 33 | 5,000 |
| CIHHS-10012 | 10 x 1/2" | 1/4" | 36 | 10,000 |
| CIHHS-10034 | 10 x 3/4" | 1/4" | 38 | 8,000 |
| CIHHS-10100 | 10 x 1" | 1/4" | 31 | 5,000 |
| CIHHS-10112 | 10 x 1-1/2" | 1/4" | 40 | 5,000 |
| CIHHS-10200 | 10 x 2" | 1/4" | 22 | 2,000 |
| CIHHS-10112+ | 10 x 1-1/2" | 5/16" | 29 | 3,000 |
| CIHHS-10200+ | 10 x 2" | 5/16" | 26 | 2,000 |
| CIHHS-10300+ | 10 x 3" | 5/16" | 26 | 1,500 |

Metal Sheet to Wood Screws

1/4" Hex Washer Head - Climaseal® Exterior Coated - Sharp Point



| Part Number | Size | Color | Weight Per Case | Qty Per Case |
|--------------|----------------|--------|-----------------|--------------|
| BX-1271000 | 9-15 x 1" | Silver | 40 | 7,000 |
| BX-1272000 | 9-15 x 1-1/2" | Silver | 32 | 4,000 |
| CIHHSC-10200 | 10-14 x 2" | Silver | 26 | 2,500 |
| CIHHSC-10212 | 10-14 x 2-1/2" | Silver | 18 | 1,500 |
| BX-1276000 | 9-15 x 3" | Silver | 22 | 1,500 |

Metal Sheet to Wood Screws

1/4" Hex Washer Head - Climaseal® Exterior Coated - Sharp Point

Assembled with 1/2" EPDM Bonded Washer



| Part Number | Size | Color | Weight Per Case | Qty Per Case |
|---------------|---------------|--------|-----------------|--------------|
| BX-1262000 | 9-15 x 1" | Silver | 29 | 4,000 |
| BX-1264000 | 9-15 x 1-1/2" | Silver | 24 | 2,500 |
| CIHSCBW-09200 | 9-15 x 2" | Silver | 26 | 2,000 |
| BX-1268000 | 9-15 x 2-1/2" | Silver | 21 | 1,500 |
| CIHSCBW-09300 | 9-15 x 3" | Silver | 18 | 1,000 |

Hollow Metal Wood Screws

Phillips Drive - Zinc Planted



| Part Number | Size | Drive | Qty Per Case |
|-------------------------------|----------|-------------|--------------|
| HO-24400 SS (Stainless Steel) | 24 x 4" | #4 Phillips | 8/Pack |
| HO-24400 | 24 x 4" | #4 Phillips | 300 |
| HO-24500 PHIL | 24 x 5" | #4 Phillips | 350 |
| HO-24600 | 24 x 6" | #4 Phillips | 200 |
| HO-14500SD | 14 x 5" | #3 Phillips | 500 |
| CIMTSS-0612 | 6 x 1/2" | #2 Phillips | 1,000 |

| Insert Bits | Point Size | Overall Length |
|-------------|------------|----------------|
| VE-125P4A | 4 | 1" |
| VE-170P4A | 4 | 2 3/4" |



Acoustical Eye Lag Screws

Zinc Plated



| Part Number | Size | Point Type | Qty Per Case |
|-------------|--------------|------------|--------------|
| CIEYL-14300 | 1/4 x 3" | Sharp | 1,000 |
| CIEYL-14400 | 1/4 x 4" | Sharp | 1,000 |
| CIEYL-14500 | 1/4 x 5" | Sharp | 1,000 |
| CIEYD-14200 | 1/4 x 2" | Self Drill | 1,000 |
| CIEYD-14314 | 1/4 x 3-1/4" | Self Drill | 1,000 |

Drill Point Screws

#12 Drill Point - #3 Phillips Drive
Truss Head - Black E-Coat

TRUFast



| Part Number | Size | Weight Per Pail | Qty Per Pail |
|-------------|-------------|-----------------|--------------|
| TFDP-1625 | 12 x 1-5/8" | 12 | 1,000 |
| TFDP-2250 | 12 x 2-1/4" | 16 | 1,000 |
| TFDP-3000 | 12 x 3" | 25 | 1,000 |
| TFDP-4000 | 12 x 4" | 30 | 1,000 |
| TFDP-5000 | 12 x 5" | 32 | 1,000 |
| TFDP-6000 | 12 x 6" | 38 | 1,000 |
| TFDP-7000 | 12 x 7" | 22 | 500 |
| TFDP-8000 | 12 x 8" | 25 | 500 |

One (1) #3 Phillips Bit included per pail

1/4" Hex Head Drill Point screws are available in the above sizes by special order

- Designed for insulation attachment to 16-18 gauge steel roof deck
- Only #12 Drill Point Roofing Fasteners on the market that will drill a 16 gauge deck
- Excellent corrosion resistance - Double Flute Drill Point speeds penetration through steel deck

Heavy Duty Drill Point Screws

#14 Drill Point - #3 Phillips Drive
Truss Head - Black E-Coat



| Part Number | Size | Weight Per Pail | Qty Per Pail |
|-------------|-------------|-----------------|--------------|
| TFHD-1250 | 14 x 1-1/4" | 11 | 1,000 |
| TFHD-1500 | 14 x 1-1/2" | 14 | 1,000 |
| TFHD-2000 | 14 x 2" | 17 | 1,000 |
| TFHD-2500 | 14 x 2-1/2" | 21 | 1,000 |
| TFHD-3000 | 14 x 3" | 24 | 1,000 |
| TFHD-3500 | 14 x 3-1/2" | 28 | 1,000 |
| TFHD-4000 | 14 x 4" | 32 | 1,000 |
| TFHD-4500 | 14 x 4-1/2" | 35 | 1,000 |
| TFHD-5000 | 14 x 5" | 36 | 1,000 |
| TFHD-5500 | 14 x 5-1/2" | 42 | 1,000 |
| TFHD-6000 | 14 x 6" | 46 | 1,000 |
| TFHD-7000 | 14 x 7" | 27 | 500 |
| TFHD-8000 | 14 x 8" | 31 | 500 |
| TFHD-9000 | 14 x 9" | 17 | 250 |
| TFHD-10000 | 14 x 10" | 19 | 250 |
| TFHD-11000 | 14 x 11" | 20 | 250 |
| TFHD-12000 | 14 x 12" | 22 | 250 |

One (1) #3 Phillips Bit included per pail

- For use in Steel, Structural Concrete, and Wood Decks for insulation or lap attachment
- Double Flute Drill Point speeds penetration through steel deck
- Exclusive tapered entry threads wedges fastener tightly into the deck for superior back-out resistance - Excellent corrosion resistance
- Pre-drilling is required for concrete using 3/16" carbide drill bit

Stainless Steel Heavy Duty Drill Point Screws

TRUFAST

#14 HD Stainless Steel Bi-Metal - #3 Phillips Drive
Truss Head



| Part Number | Size | Thread Length | Weight Per Pail | Qty Per Pail |
|----------------|--------------|---------------|-----------------|--------------|
| TFHDB-1500-SS | 14" x 1-1/2" | 1-1/2"(Full) | 13 | 1,000 |
| TFHDB-2000-SS | 14" x 2" | 2"(Full) | 16 | 1,000 |
| TFHDB-3000-SS | 14" x 3" | 2-7/8" | 24 | 1,000 |
| TFHDB-4000-SS | 14" x 4" | 3-7/8" | 31 | 1,000 |
| TFHDB-5000-SS | 14" x 5" | 3-7/8" | 37 | 1,000 |
| TFHDB-6000-SS | 14" x 6" | 3-7/8" | 44 | 1,000 |
| TFHDB-7000-SS | 14" x 7" | 3-7/8" | 26 | 500 |
| TFHDB-8000-SS | 14" x 8" | 3-7/8" | 30 | 500 |
| TFHDB-10000-SS | 14" x 10" | 3-7/8" | 18 | 250 |
| TFHDB-12000-SS | 14" x 12" | 3-7/8" | 21 | 250 |

One (1) #3 Phillips Bit included per pail

- For use in Steel, Structural Concrete, and Wood Decks for insulation or lap attachment
- Double Flute Drill Point speeds penetration through steel deck
- Exclusive tapered entry threads wedges fastener tightly into the deck for superior back-out resistance
- Stainless Steel offers excellent corrosion resistance

Extra Heavy Duty Drill Point Screws

#15 Drill Point - #3 Phillips Drive
Truss Head - Black E-Coat



| Part Number | Size | Thread Length | Weight Per Pail | Qty Per Pail |
|----------------|-------------|---------------|-----------------|--------------|
| TFEHD-1250-15 | 15 x 1-1/4" | 1 1/4" (Full) | 13 | 1,000 |
| TFEHD-2000-15 | 15 x 2" | 2" (Full) | 20 | 1,000 |
| TFEHD-3000-15 | 15 x 3" | 3" (Full) | 28 | 1,000 |
| TFEHD-4000-15 | 15 x 4" | 3" | 38 | 1,000 |
| TFEHD-5000-15 | 15 x 5" | 4" | 48 | 1,000 |
| TFEHD-6000-15 | 15 x 6" | 4" | 28 | 500 |
| TFEHD-7000-15 | 15 x 7" | 4" | 34 | 500 |
| TFEHD-8000-15 | 15 x 8" | 4" | 37 | 500 |
| TFEHD-9000-15 | 15 x 9" | 4" | 21 | 250 |
| TFEHD-10000-15 | 15 x 10" | 4" | 24 | 250 |
| TFEHD-11000-15 | 15 x 11" | 4" | 25 | 250 |
| TFEHD-12000-15 | 15 x 12" | 4" | 29 | 250 |
| TFEHD-14000-15 | 15 x 14" | 4" | 33 | 250 |
| TFEHD-16000-15 | 15 x 16" | 4" | 37 | 250 |
| TFEHD-18000-15 | 15 x 18" | 4" | 42 | 250 |
| TFEHD-20000-15 | 15 x 20" | 4" | 47 | 250 |
| TFEHD-22000-15 | 15 x 22" | 4" | 51 | 250 |
| TFEHD-24000-15 | 15 x 24" | 4" | 56 | 250 |

One (1) #3 Phillips Bit included per pail

- Created for lap attachment in higher wind uplift roof assembly
- Double Flute Drill Point speeds penetration through steel deck
- Exclusive tapered entry threads wedges fastener tightly into the deck for superior back out resistance
- Deep buttress thread design provides exceptional pull-out resistance



Structural Insulation Panel Screws

Pancake Head - T-30 6-Lobe Drive - Black E-Coat

Drill Point or Thread Point For Attaching Panels

to Corrugated Steel Deck and Wood



| Drill Point Part Number | Thread Point Part Number | Size | Weight Per Pail | Qty Per Pail |
|-------------------------|--------------------------|-------------|-----------------|--------------|
| | TFSIPTP-2000 | 14 x 2" | 10 | 500 |
| | TFSIPTP-2500 | 14 x 2-1/2" | 12 | 500 |
| TFSIPLD-3000 | TFSIPTP-3000 | 14 x 3" | 14 | 500 |
| TFSIPLD-3500 | TFSIPTP-3500 | 14 x 3-1/2" | 16 | 500 |
| TFSIPLD-4000 | TFSIPTP-4000 | 14 x 4" | 18 | 500 |
| TFSIPLD-4500 | TFSIPTP-4500 | 14 x 4-1/2" | 20 | 500 |
| TFSIPLD-5000 | TFSIPTP-5000 | 14 x 5" | 23 | 500 |
| TFSIPLD-5500 | TFSIPTP-5500 | 14 x 5-1/2" | 24 | 500 |
| TFSIPLD-6000 | TFSIPTP-6000 | 14 x 6" | 26 | 500 |
| TFSIPLD-6500 | TFSIPTP-6500 | 14 x 6-1/2" | 28 | 500 |
| TFSIPLD-7000 | TFSIPTP-7000 | 14 x 7" | 30 | 500 |
| TFSIPLD-7500 | TFSIPTP-7500 | 14 x 7-1/2" | 32 | 500 |
| TFSIPLD-8000 | TFSIPTP-8000 | 14 x 8" | 35 | 500 |
| TFSIPLD-8500 | TFSIPTP-8500 | 14 x 8-1/2" | 18 | 250 |
| TFSIPLD-9000 | TFSIPTP-9000 | 14 x 9" | 19 | 250 |
| TFSIPLD-9500 | TFSIPTP-9500 | 14 x 9-1/2" | 20 | 250 |
| TFSIPLD-10000 | TFSIPTP-10000 | 14 x 10" | 22 | 250 |
| TFSIPLD-11000 | TFSIPTP-11000 | 14 x 11" | 23 | 250 |
| TFSIPLD-12000 | TFSIPTP-12000 | 14 x 12" | 25 | 250 |
| TFSIPLD-13000 | TFSIPTP-13000 | 14 x 13" | 27 | 250 |
| TFSIPLD-14000 | TFSIPTP-14000 | 14 x 14" | 29 | 250 |
| TFSIPLD-15000 | TFSIPTP-15000 | 14 x 15" | 31 | 250 |
| TFSIPLD-16000 | TFSIPTP-16000 | 14 x 16" | 32 | 250 |
| TFSIPLD-18000 | TFSIPTP-18000 | 14 x 18" | 39 | 250 |

Two (2) T-30 Driver Bits included per pail

- Able to attach panels up to 18 gauge thick steel members without pre-drilling

Pancake Head - T-30 6-Lobe Drive

Black E-Coat - Drill Point



| Part Number | Size | Weight Per Pail | Qty Per Pail |
|---------------|--------------|-----------------|--------------|
| TFSIPHD-4500 | 12 x 4-1/2" | 21 | 500 |
| TFSIPHD-6000 | 14 x 6" | 32 | 500 |
| TFSIPHD-8000 | 14 x 8" | 21 | 250 |
| TFSIPHD-9750 | 14 x 9-3/4" | 25 | 250 |
| TFSIPHD-11750 | 14 x 11-3/4" | 30 | 250 |
| TFSIPHD-13750 | 14 x 13-3/4" | 39 | 250 |

Two (2) T-30 Driver Bits included per pail

- Able to attach panels up to 3/16" thick steel members without predrilling

PFC Purlin Screws

#3 Square Drive - Pancake Head
Black E-Coat - Drill Point



TRUFAST

| Part Number | Size | Weight Per Pail | Qty Per Pail |
|-------------|-------------|-----------------|--------------|
| TFPF-1375 | 14 x 1-3/8" | 28 | 2,500 |
| TFPF-2750 | 14 x 2-3/4" | 20 | 1,000 |
| TFPF-3750 | 14 x 3-3/4" | 27 | 1,000 |
| TFPF-4750 | 14 x 4-3/4" | 37 | 1,000 |
| TFPF-5750 | 14 x 5-3/4" | 42 | 1,000 |
| TFPF-6750 | 14 x 6-3/4" | 49 | 1,000 |
| TFPF-7750 | 14 x 7-3/4" | 28 | 500 |
| TFPF-8750 | 14 x 8-3/4" | 32 | 500 |

One (1) #3 Square Drive Bit included per package

- Purlin Fasteners are designed to drill structural steel purlins up to 3/16" thick. Allow a minimum of 1" penetration through the purlin. For best results, install fasteners using a screw gun no faster than 1800 rpm.

Stress Plates

26 Gauge Galvalume™ Metal Plates



| Part Number | Description | Diameter | Hole Size | Qty Per Case |
|-------------|-------------|----------|-----------|--------------|
| TFMP-2000 | Metal | 2" | 1/4" | 1,000 |
| TFMP-3000 | Metal | 3" | 1/4" | 1,000 |

Plates are for use with Phillips Truss Head Fastener only.

Aluminum Termination Bar



| Part # | Length | Hole Punch | Qty & Ft./Pkg | Pkg. Type | Wgt./Pkg |
|------------|--------|------------|---------------|-------------|----------|
| TFTB-50-6 | 10 FT | 6" o.c. | 50 - 500 ft | 4" Tube | 40 lbs |
| TFTB-75-6 | 10 FT | 6" o.c. | 50 - 500 ft | 3-1/2" Tube | 50 lbs |
| TFTB-90F-6 | 10 FT | 6" o.c. | 50 - 500 ft | 3-1/2" Tube | 55 lbs |
| TFTB-100-6 | 10 FT | 6" o.c. | 50 - 500 ft | 4" Tube | 65 lbs |
| TFTB-100-8 | 10 FT | 8" o.c. | 50 - 500 ft | 4" Tube | 65 lbs |
| TFTB-125-6 | 10 FT | 6" o.c. | 50 - 500 ft | 4" Tube | 75 lbs |

Sold in full tube quantity only.

TOD-EZ01 (25 oz.)

EZ FLO gun foam

12 cans/case
25 lbs/case
11 Dispensed Gallons/Can
2400 Cubic Inches
High Volume
R factor 6 per inch
Closed Cell Foam
1/2" Bead = 1080 Linear Feet
Low Expansion



Perfect for around doors and windows
Stops passage of air, gases, water, dust
Around pipe chases
Seals out insects

TOD-GF600 (22.3 oz.)

Pur Fill 1G 600

12 cans/case
22 lbs/case
10 Dispensed Gallons/Can
1/2" Bead = 960 Linear Feet
2200 Cubic Inches
R factor 6 per inch
1.3 Cubic Feet
15 Board Feet
U.S.D.A approved
Fills voids



Stops passage of air, gases, water, sound, etc
Perfect for around windows and doors
One hour moisture cure
Professional control

TOD-GF01 (27.8 oz.)

Pur Fill 1G 750

12 cans/case
27 lbs/case
12 Dispensed Gallons/Can
1/2" Bead= 1200 Linear Feet
2820 Cubic Inches
R factor 6 per inch
1.6 Cubic Feet
19 Board Feet
U.S.D.A. approved
Fills voids



Stops passage of air, gases, water, sound, etc.
Perfect for around windows and doors.
One hour moisture cure.
Professional control

TOD-PS01 (22.4 oz.)

Pur Stick

12 cans/case
22 lbs/case
Equivalent to 10-20 Quart Tubes
of Constructive Adhesive
1/2" Bead = 825 Linear Feet
Quick Open Time
ASTM-C 557
APA: AFG-01



Bonds to most materials
Subfloor and drywall adhesive
Cuts labor time in half
Complete Control
Eliminates Squeaks

TOD-BF01 (27.8 oz.)

Pur Black

12 cans/case
27 lbs/case
12 Dispensed Gallons/Can
1/2" Bead = 1200 Linear Feet
2820 Cubic Inches
1.6 Cubic Feet
19 Board Feet
R factor 6.0 per inch
Black in color



Will not change color in exterior applications
Nuisance/Pest Control
RV Manufacturing
Outside Applications
Sealing out bats and birds

TOD-CW01 (20.3 oz.)

Cold Weather 1G 600

12 cans/case
22 lbs/case
10 Dispensed Gallons/Can
1/2" Bead = 960 Linear Feet
2200 Cubic Inches
R factor 6.0 per inch
1.3 Cubic Feet
15 Board Feet



Quicker cure time in cold temperature
10 minutes tackfree time
Tighter cell structure
Good for around windows and doors
Resists solvents, water, and age hardening

TOD-IPF01 (22.3 oz.)

IPF Foam

12 cans/case
22 lbs/case
9 Dispensed Gallons/Can
1/2" Bead = 700 Linear Feet
2200 Cubic Inches
Scented Formulation
1.3 Cubic Feet
16 Board Feet
One hour moisture cure

Perfect for sealing out

Insects
Birds & bats
Rodents & small animals



TOD-FB01 (24 oz.)

Pur Fill Fireblock

12 cans/case
24 lbs/case
11 Dispensed Gallons/Can
1/2" Bead = 1100 Linear Feet
2200 Cubic Inches
ICC-ES Evaluation ESR-2977
1.5 Cubic Feet

Orange in color
Fireblock
Smoke seal
Low VOC
ASTM E84
ASTM E-814 (Modified)



TOD-WF01 (22.4 oz.)

Pur Fill Window

12 cans/case
23 lbs/case
10 Dispensed Gallons/Can
1/2" Bead = 960 Linear Feet
2200 Cubic Inches
R Factor 5.9 per inch
1.3 Cubic Feet
15 Board Feet

AAMA-812-04 tested & approved
Stops drafts
Air sealing
Energy efficiency



TOD-NF12 (12 oz.)

Pur Fill NF 12

12 cans/case
13 lbs/case
4 Dispensed Gallons/Can
3/8" Bead = 780 Linear Feet
960 Cubic Inches
UL listed
.6 cu. Ft
5.0 R factor per inch

Straw dispensed
Fills voids
Perfect for small jobs
Convenient & economical
Cures in 24 hours



TOD-NF01 (21.9 oz.)

Pur Fill NF 24

12 cans/case
22 lbs/case
9 Dispensed Gallons/Can
1/2" Bead = 800 Linear Feet
1800 Cubic Inches
5.0 R factor per inch

Straw dispensed
Fills voids
Perfect for small jobs
Expands and bonds
Cures in 24 hours



TOD-BF16 (14.9 oz.)

Pur Black NF

12 cans/case
15 lbs/case
5 Dispensed Gallons/Can
3/8" Bead = 1025 Linear Feet
1000 Cubic Inches
R factor 5.0 per inch
Black in color

Straw dispensed
Perfect for outside application
Sandable and paintable
Seals out small animals
Cures in 24 hours
Will not change color in exterior applications



TOD-DF01 (12.7 oz.)

Duo Fill 400

15 cans/case
18 lbs/case
11 Dispensed Gallons/Can
600 Cubic Inches
Light blue in color
1 actuator per can
Rigid dispensing
R factor 8.0 per inch
Expands 30 times

Two component foam system
Stops flowing water
Fast 3 minute cure
Dynamic expansion perfect for
Gas and electric utilities
Water municipalities
Telephone and cable companies
Unique can-inside-a-can packaging



TOD-GC01 (12.5 oz.)

Pur Fill Gun Cleaner

12 cans/case
14 lbs/case
Flushes out uncured foam
Fits all dispensing guns

Acetone
Flammable
Please wear gloves
Use only when flow of foam stops or slows
Use with caution



TOD-CS01

Plastic Carrying Case

Green in color
Strong molded plastic
Durable
20" x 17" x 5 1/2"
Holds a mounted gun system plus 3 extra cans



TOD-N1401

**14 Gauge 2 Inch Plastic
Needle for Dispensing**

Use with
Pageris
Pageris Eco
Long Barrel Pageris



TOD-PA01

Plastic Adapters


Used with
Pageris
Pageris Eco
Long Barrel Pageris



TOD-FT01

Flexible Tubing

Used with
Pageris
Pageris Eco
Long Barrel Pageris



TOD-AC09

Duo Fill 400 9" Actuator



TOD-FR01

Foam Reducers

Used with
Pageris
Pageris Eco
Long Barrel Pageris





TOD-SH01
Pur Shooter Gun
Inexpensive
All metal
Heavy duty
Excellent starter gun



TOD-SH02
Pur Shooter Plus Gun
Purshooter with added benefits
Less weight
More O-ring seals



TOD-ECO
Pageris Eco Gun
Steel
Warranty
Teflon-Coated adapter
Professional



TOD-GU01
Pageris Gun
Stainless steel
Warranty
Teflon-Coated adapter
Top of the line



TOD-GU24
Long Barrel Pageris Gun
Pageris Gun with 24 inch stainless steel long barrel
Ideal for hard to reach places

BEST RESULTS

- NO NEED FOR GUN CLEANER!
- ALWAYS LEAVE A CAN ON THE GUN
 - SHAKE THE CAN WELL
- CAN TEMPERATURE SHOULD BE OVER 60 DEGREES

Sikaflex 15LM Sealant



- Low-modulus, 1 - Component, Polyurethane-base
- Non-Sag Elastomeric Sealant
- Paintable, sandable, stainable, and waterproof
- Excellent adhesion to most construction materials without a primer
- +100%/-50% joint movement capabilities
- Application temperature is 40 degrees to 100 degrees F
- Tack-free time is 3-6 hours
- Easy to tool
- Fits standard caulk gun
- Meets ASTM C-920
- Covers 12.4 Lineal Feet of 1/2 inch x 1/4 inch joint



| Part Number | Color | Fluid Oz Per Tube | Qty Per Case |
|-------------|----------------|-------------------|--------------|
| SI-90995 | White | 10.1 | 24 |
| SI-90986 | Aluminum Gray | 10.1 | 24 |
| SI-92804 | Black | 10.1 | 24 |
| SI-90990 | Colonial White | 10.1 | 24 |
| SI-90989 | Capital Tan | 10.1 | 24 |
| SI-90993 | Limestone | 10.1 | 24 |
| SI-90991 | Dark Bronze | 10.1 | 24 |
| SI-90987 | Beige | 10.1 | 24 |
| SI-107760 | Medium Bronze | 10.1 | 24 |
| SI-92805 | Coping Stone | 10.1 | 24 |
| SI-90994 | Redwood Tan | 10.1 | 24 |
| SI-92806 | Off White | 10.1 | 24 |
| SI-90985 | Almond | 10.1 | 24 |
| SI-92807 | Aluminum Stone | 10.1 | 24 |
| SI-187645 | Stone | 10.1 | 24 |

Cure time: 1/2" bead is tack free in 6 hours at 75 degrees F with 50% relative humidity. Full cure is in 7-10 days.

Allow 7-10 days for temporary water immersion. For best results, store at 40-75 degrees F. Condition material to 65 - 75 degrees F before using.

Allow sealant to cure 72 hours before painting or exposing to traffic.

Use for sealing cracks, expansion joints, doors, windows, siding, roofing, gutters, sills, thresholds, basements, vents, skylights, wall penetrations, and precast panels.

Apply to concrete, wood, brick, aluminum, steel, glass, tile, marble, stone, and etched PVC.

Sikaflex 1C Self Leveling Sealant



- High performane, single component material
- Used to seal horizontal joints
- No mixing/no tooling
- Self-leveling, pourable
- Permanently elastic
- Excellent adhesion
- Accelerated curing
- High durability
- Resists aging, weathering
- Paintable, sandable, stainable, and waterproof
- Meets ASTM C-920
- Covers 36 linear feet of 1/2 x 1/4" joint

| Part Number | Color | Fluid Oz Per Tube | Qty Per Case |
|-------------|-----------|-------------------|--------------|
| SI-90942 | Limestone | 29 | 12 |

Cure time: 1/2" bead is tack free in 1-2 hours at 73 degrees F with 50% relative humidity. Full cure is 3-5 days.

Allow 7-10 days for temporary water immersion. For best results, store at 40-75 degrees F. Condition material to 65-75 degrees F before using.

Allow sealant to cure 72 hours before painting or exposing to traffic

Use on driveways, garage floors, sidewalks, balconies, pavements, patios, steps, basements, and warehouses.



Sammys® Vertical Mount for Wood




| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|------------|----------|--------------------|-----------------------------------|------------------|
| BX-8002957 | GST 100 | 1/4" | 1/4" x 1" | 210 (7/16" OSB) 670 (3/4" Ply) | 25/125 |
| BX-8003957 | GST 200 | 1/4" | 1/4" x 2" | 1760 (Fir) | 25/125 |
| BX-8007957 | GST 10 | 3/8" | 1/4" x 1" | 210 (7/16" OSB) 670 (3/4" Ply) | 25/125 |
| BX-8008957 | GST 20 | 3/8" | 1/4" x 2" | 1760 (Fir) | 25/125 |
| BX-8068925 | GST 20-SS | 3/8" | 1/4" x 2" | 1760 (Fir) | 25/125 |
| BX-8009925 | GST 25-380 | 3/8" | 1/4" x 2-1/2" | 2113 (Fir) | 25/125 |
| BX-8010957 | GST 30 | 3/8" | 1/4" x 3" | 2060 (Fir) | 25/125 |
| BX-8013925 | GST 2 | 1/2" | 1/4" x 2" | 1760 (Fir) | 25/125 |
| BX-8015925 | GST 3 | 1/2" | 1/4" x 3" | 2275 (Fir) | 25/125 |

SPECIAL NUT DRIVER SYSTEM

- The nut drivers were designed with a unique spin-off feature which provides a fast and safe installation each time. When the face of the driver comes into contact with the material you are installing into, continue drilling until nut driver spins free. Installation is complete. Warranty requires use of the appropriate nut driver for installations.

Visit www.itwbuildex.com for literature, technical information, and training modules for Sammys® products.

Sidewinder® Horizontal Mount for Wood



| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|------------|----------|--------------------|------------------|------------------|
| BX-8020957 | SWG 10 | 3/8" | 1/4 x 1" | 622 (Fir) | 25/125 |
| BX-8021957 | SWG 20 | 3/8" | 1/4 x 2" | 1725 (Fir) | 25/125 |
| BX-8022925 | SWG 25-380 | 3/8" | 3/8 x 2-1/2" | 2249 (Fir) | 25/125 |
| BX-8023925 | SWG 30 | 3/8" | 1/4 x 3" | 1884 (Fir) | 25/125 |

#14 SW Red Nut Driver
Part # BX-8114910

Sammys Swivel Head™

Swivel Head Mount for Wood



SAMMYS®



#14 Black Nut Driver
Part # BX-8139957





#14 SH Orange Nut Driver
Part # BX-8269957

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|---------------|----------|--------------------|--|------------------|
| BX-8139957 | SH-GST 20 | 3/8" | 1/4" x 2" | 1257 (Fir) | 25/125 |
| BX-8269957 | SH-GST/CST 20 | 3/8" | 5/16" x 1-3/4" | 1406 @ 45 degrees off vertical Dim. Lumber 903 Dim. Lumber | 25/125 |

Product Features

- Eliminates distortion of threaded rod.
- Accomodates 3 1/2" x 12 pitch roof.
- Allows 17 degree deflection from vertical
- Saves times from traditional methods.
- Reduces installation costs.



Sammys®

Vertical Mount for Steel



#14 Black Nut Driver
Part # BX-8113910



#14 SW Red Nut Driver
Part # BX-8114910

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|-------------|----------|-------------------------|---------------------------|------------------|
| BX-8024957 | DSTR 100* | 1/4" | 1/4-20 x 1" TEKS 3 | 1510 (20 ga.) | 25/125 |
| BX-8025957 | DST 100 | 1/4" | 1/4-14 x 1 TEKS 3 | 446 (20 ga.) | 25/125 |
| BX-8026957 | DST 150 | 1/4" | 1/4-14 x 1-1/2" TEKS 3 | 970 (16 ga.) | 25/125 |
| BX-8027957 | DST 200 | 1/4" | 1/4-14 x 2" TEKS 3 | 446 (20 ga.) | 25/125 |
| BX-8038957 | DSTR 1* | 3/8" | 1/4-20 x 1" TEKS 3 | 1510 (20 ga.) | 25/125 |
| BX-8037957 | DSTR 1-1/2* | 3/8" | 12-24 x 1-1/2" TEKS 5 | 1510 (3/16") | 25/125 |
| BX-8039957 | DSTR 516* | 3/8" | 5/16-18 x 1-1/4" TEKS 3 | 2200 (20 ga.) | 25/125 |
| BX-8040957 | DST 10 | 3/8" | 1/4-14 x 1" TEKS 3 | 446 (20 ga.) 970 (16 ga.) | 25/125 |
| BX-8041957 | DST 15 | 3/8" | 1/4-14 x 1-1/2" TEKS 3 | 446 (20 ga.) 970 (16 ga.) | 25/125 |
| BX-8042957 | DST 20 | 3/8" | 1/4-14 x 2" TEKS 3 | 446 (20 ga.) 970 (16 ga.) | 25/125 |
| BX-8044957 | DST 30 | 3/8" | 1/4-14 x 3" TEKS 3 | 446 (20 ga.) 970 (16 ga.) | 25/125 |
| BX-8045957 | DST 516 | 3/8" | 5/16-18 x 1-1/4" TEKS 3 | 1500 (3/16") | 25/125 |
| BX-8046957 | TEK 50 | 3/8" | 12-14 x 1-1/2" TEKS 5 | 3125 (3/16") | 25/125 |
| BX-8031925 | DST 2.0 | 1/2" | 1/4-14 x 2 TEKS 3 | 446 (20 ga.) 970 (16 ga.) | 25/125 |

*Includes retaining nut



Sidewinder® Horizontal Mount for Steel



#14 SW Red Nut Driver
Part # BX-8114910

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|-------------|----------|-----------------------|------------------|------------------|
| BX-8050957 | SWD 10 | 3/8" | 1/4-14 x 1" TEKS 3 | 1477 (16 ga.) | 25/125 |
| BX-8052957 | SWD 20 | 3/8" | 1/4-14 x 2" TEKS 3 | 1477 (16 ga.) | 25/125 |
| BX-8055957 | SWDR 1* | 3/8" | 1/4-20 x 1" TEKS 3 | 1900 (20 ga.) | 25/125 |
| BX-8054957 | SWDR 1-1/2* | 3/8" | 12-24 x 1-1/2" TEKS 5 | 2375 (3/16") | 25/125 |
| BX-8056957 | SWDR 516* | 3/8" | 5/16-18 x 1-1/4" TEKS | 2480 (20 ga.) | 25/125 |

*Includes retaining nut

Sammys Swivel Head™ Swivel Head Mount for Steel



#14 Black Nut Driver
Part # BX-8113910



#14 SW Red Nut Driver
Part # BX-8114910

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|-----------|----------|-----------------------|-------------------------------------|------------------|
| BX-8137957 | SH-DSTR 1 | 3/8" | 1/4-20 x 1" TEKS 3 | 3220 (3/16") | 25/125 |
| BX-8268957 | SH-TEK 50 | 3/8" | 12-24 x 1 3/4" TEKS 5 | 2368 (1/2" Steel Vertical) | 25/125 |
| | | | | 1306 (45 degree off vertical) | |
| | | | | 2281 (3/16" HSS) | |
| | | | | 1585 (3/16" HSS 45 degree Vertical) | |

Product Features

- Eliminates distortion of threaded rod in sloped roof applications.
- Accomodates 3 1/2" x 12 pitch.
- Installs into angled z-purlin; allows threaded rod to hang plumb.
- Allows 17 degree deflection from vertical.
- Saves times from traditional methods.





Sammy X-Press Drill/Drive™ **NEW!**



| Part Number | Model | Rod Size | Descriptions | "Ultimate Pullout (lbs)" | Application | Qty Per Box/Case |
|-------------|---------|----------|------------------------------|---|-------------------|------------------|
| 8151957 | XPDD 40 | 3/8" | Sammy X-Press Drill/Drive 40 | 1092 (22 ga.) 1340 (20 ga.) 1733 (16 ga.) | Metal Deck/Purlin | 25/125 |

Sammy X-Press™


Vertical Mount for Steel Deck or Purlin

Product Features

- The Sammy X-Press expands to provide direct vertical attachment in light gauge steel deck or purlin (22 ga. - 1.8").
- Installs in seconds with Sammy X-Press It Tool, saving time & installation costs.
- Use in applications where access to the back of the installed fastener is prohibited; ie. metal roof deck, tubular steel, or vapor barrier fabric.
- Less jobsite material needed.
- No retaining nut required.



| Part Number | Model | Rod Size | Descriptions | "Ultimate Pullout (lbs)" | Application | Qty Per Box/Case |
|-------------|--------|----------|-------------------|--------------------------|-------------------|------------------|
| BX-8181922 | XP 200 | 1/4" | Sammy X-Press 200 | 1146 (22 ga.) | Metal Deck | 25/125 |
| BX-8150922 | XP 20 | 3/8" | Sammy X-Press 20 | 1146 (22 ga.) | Metal Deck/Purlin | 25/125 |
| BX-8153922 | XP 35 | 3/8" | Sammy X-Press 35 | 1783 (16 ga.) | Purlin | 25/125 |

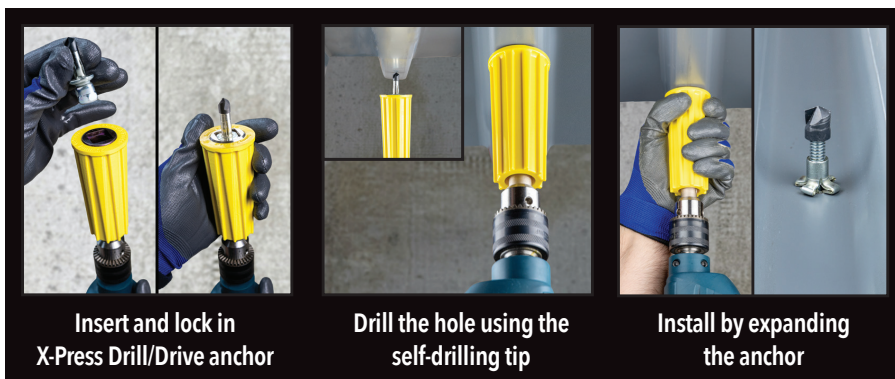

| Part Number | Model | Description | Qty |
|-------------|--------|---------------------|-----|
| BX-8196910 | IT 2.0 | X-Press It Tool 2.0 | 1 |
| BX-8152910 | XPDB | 25/64" Drill Bit | 1 |

*Tool includes: Sleeve, Bit Receiver, Hex Wrench, and 25/64" Drill Bit



The Sammy X-Press

expands to provide direct vertical attachment in:

- Metal Deck (22-16 gauge)
- Purlin (18-16 gauge)




Sidewinder X-Press™

Horizontal Mount for Steel Deck or Purlin

Product Features


- The Sidewinder X-Press expands to provide horizontal attachment in: 16 gauge - 3/16" steel - purlin, tubular steel.
- Installs in seconds with Sammy X-Press It Tool, saving time & installation costs.
- Use in applications where access to the back of the installed fastener is prohibited; ie. metal roof deck, tubular steel, or vapor barrier fabric.
- Less jobsite material needed.
- No retaining nut required.
- Provides design flexibility.

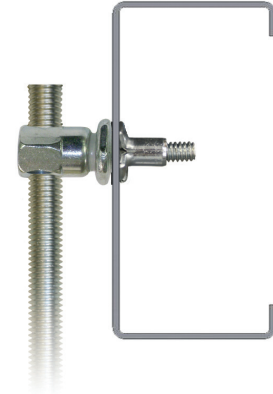

| Part Number | Model | Rod Size | Descriptions | "Ultimate Pullout (lbs)" | Application | Qty Per Box/Case |
|-------------|---------|----------|-----------------------|--------------------------|-------------|------------------|
| BX-8293957 | SWXP 35 | 3/8" | Sidewinder X-Press 35 | 1798 (16 ga.) | Purlin | 25/125 |

Swivel X-Press™

Swivel Head Mount for Steel Deck or Purlin

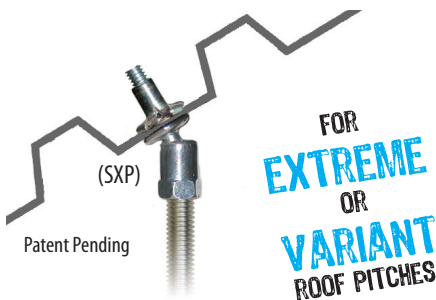

Product Features

- The *Swivel X-Press* allows you to hang plumb in extreme roof pitches: 89 degrees in z-purlin. 45 degrees in metal deck for 12/12 pitch
- Installs in seconds with Sammy X-Press It® Tool, saving time and installation costs
- Use in applications where access to the back of the installed fastener is prohibited; ie. Metal roof deck, tubular steel, or vapor barrier fabric
- Less jobsite material needed
- No retaining nut required
- Provides design flexibility

| Part Number | Model | Rod Size | Descriptions | "Ultimate Pullout (lbs)" | Application | Qty Per Box/Case |
|-------------|---------|----------|--------------------|----------------------------|-------------|------------------|
| BX-8294922 | SXP 20 | 3/8" | Swivel X-Press 20 | 1061 (22 ga. Vert) | Metal Deck | 25/125 |
| | | | | 829 (45 degrees off vert) | | |
| BX-8295922 | SXP 35 | 3/8" | Swivel X-press 35 | 1675 (16 ga. Vert) | Purlin | 25/125 |
| | | | | 1558 (89 degrees off vert) | | |
| BX-8272957 | SXP 2.0 | 1/2" | Swivel X-press 2.0 | 1061 (22 ga. Vert) | Metal Deck | 25/125 |
| | | | | 829 (45 degrees off vert)" | | |
| BX-8271957 | SXP 3.5 | 1/2" | Swivel X-press 3.5 | 1675 (16 ga. Vert) | Purlin | 25/125 |
| | | | | 1558 (89 degrees off vert) | | |

Sammys® Vertical Mount for Concrete



SAMMYS®



#14 Black Nut Driver
Part # BX-8113910



#14 SW Red Nut Driver
Part # BX-8114910

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|---------|----------|--------------------|------------------|------------------|
| BX-8058957 | CST 200 | 1/4" | 5/16 x 1-3/4" | 2400 | 25/125 |
| BX-8059957 | CST 20 | 3/8" | 5/16 x 1-3/4" | 2400 | 25/125 |
| BX-8060925 | CST 2 | 1/2" | 5/16 x 1-3/4" | 2400 | 25/125 |

Sidewinder® Horizontal Mount for Concrete



#14 SW Red Nut Driver
Part # BX-8114910

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|--------|----------|--------------------|------------------|------------------|
| BX-8061957 | SWC 20 | 3/8" | 5/16 x 1-3/4" | 2450 | 25/125 |

Sammy's Swivel Head® Swivel Head Mount for Concrete



#14 SH Orange Nut Driver
Part # BX-8273910

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout | Qty Per Box/Case |
|-------------|---------------|----------|--------------------|---|------------------|
| BX-8269957 | SH-GST/CST 20 | 3/8" | 5/16 x 1-3/4" | 2537 in 3000 psi concrete 1459 @ 45 degree off vertical in 3000 psi concrete 2852 in 6000 psi concrete 1636 @ 45 degrees off vertical in 6000 psi concrete | 25/125 |



#14 Black Nut Driver
Part # BX-8113910

Sammys Toggle™ Vertical Mount for Sheetrock



SAMMYS®

| Part Number | Model | Rod Size | Screw Descriptions | Ultimate Pullout (lbs) | Qty Per Box/Case |
|-------------|--------|----------|--------------------|---|------------------|
| BX-8064925 | SST 30 | 3/8" | 1/4 x 3" | 450 (Lath & Plaster) 404 (2 Layers 5/8 Rock) | 25/125 |



Speedy Pole Tool

| Part Number | Descriptions | Qty Per Box | Qty |
|-------------|-------------------------------|-------------|-----|
| BX-SP6 | Speedy Pole 6 feet to 18 feet | 1 | 1 |



TENRYU
Saw Blades



| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
|---------------|-----------------|----------|---------|-----|------|-------|------|---------------|------------------|---|
| ALUMINIUM | TECF-16560A | 6-1/2" | 5/8" | 60 | 0 | 0.079 | 3900 | Cordless Trim | Alumi-Cut | Cutting Aluminum w/ 6-1/2" Cordless saws |
| | TEIA-18560D | 7-1/4" | 5/8" KO | 60 | 0 | 0.079 | 8300 | Circular | Industrial | Quiet Cutting, General Purpose |
| | TEIA-25580DN | 10" | 5/8" | 80 | -5 | 0.094 | 5870 | Miter/RA | Industrial | Quiet Cutting, General Purpose |
| | TEIA-305100DN | 12" | 1" | 100 | -5 | 0.11 | 5000 | Miter | Industrial | Quiet Cutting, General Purpose |
| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
| FERROUS METAL | TECF-13532M | 5-3/8" | 20mm | 32 | 0 | 0.059 | 3700 | Cord Free | Metal | Mild Steel |
| | TECF-13536M | 5-3/8" | 20mm | 36 | 0 | 0.057 | 3700 | Cord Free | Metal | Spiral Duct |
| | TEPRF-18548BW | 7-1/4" | 5/8" KO | 48 | 0 | 0.079 | 5800 | Circular Saw | Steel-Pro | Signature Steel-Pro Blade for mechanical construction. Up to 1/8" Wall Thickness |
| | TEPRF-18548CBWD | 7-1/4" | 5/8" KO | 48 | 0 | 0.079 | 5800 | Circular Saw | Steel-Pro Gold | Unique Modified ATB grind for efficient cutting on thin and shaped sheet material |
| | TEPRF-18548BWK | 7-1/4" | 5/8" KO | 48 | 0 | 0.079 | 5800 | Circular Saw | Stabilizer | Ferrous (Up to 1/8") |
| | TEHMC-18536BW | 7-1/4" | 5/8" KO | 36 | 0 | 0.073 | 4800 | Circular Saw | Heavy Metal Plus | 1/8"-1/4" Wall Thickness |
| | TEPRF-20348CBN | 8" | 5/8" KO | 48 | 0 | 0.087 | 4300 | Circular Saw | Steel-Pro | General Purpose. Up to 1/8" Wall Thickness. Milwaukee Saw. |
| | TEHMC-20342BW | 8" | 5/8" KO | 48 | 0 | 0.087 | 4300 | Circular | Stabilizer | Ferrous (Up to 1/8") Many Cuts, Milwaukee |
| | TEPRF-30560DK | 12" | 1" | 60 | 0 | 0.098 | 2000 | Dry Cut | Stabilizer | General Purpose. Up to 3/8" Wall Thickness. For 12" Dry Cutters |
| | TEHMC-30554DX | 12" | 1" | 54 | 2 | 0.087 | 2000 | Dry Cut | Stabilizer | Ferrous for 12" Dry Cutter (Low RPM) |
| | TEHMC-30572DX | 12" | 1" | 72 | 2 | 0.087 | 2000 | Dry Cut | Heavy Metal Plus | General Purpose |
| | TEPRF-35572DK | 14" | 1" | 72 | 0 | 0.098 | 1700 | Dry Cut | Stabilizer | Ferrous (Up to 1/8") Many Cuts, 14" Dry Cutter |
| | TEHMC-35566DX | 14" | 1" | 66 | 2 | 0.087 | 1800 | Dry Cut | Heavy Metal | For 1/8"-1/2" Heavy Stock |
| | TEHMC-35581DX | 14" | 1" | 81 | 2 | 0.087 | 1800 | Dry Cut | Heavy Metal Plus | General Purpose |
| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
| FIBER CEMENT | TEBP-16504 | 6-1/2" | 5/8" KO | 4 | 10 | .091 | 9250 | Cord Free | Board-Pro | Fiber-Cement Siding. For stacked sheet cuts |
| | TEBP-18505 | 7-1/4" | 5/8" KO | 5 | 12 | 0.091 | 8300 | Circular Saw | Board-Pro | Good for Single or Stack (up to 5 sheets) cutting |
| | TEBP-25506 | 10" | 5/8" KO | 6 | 8 | 0.098 | 5870 | Table/Miter | Board-Pro | Good for Single or Stack (up to 5 sheets) cutting |
| | TEBP-30508 | 12" | 1" | 8 | 8 | 0.098 | 5000 | Table/Miter | Board-Pro | Good for Single or Stack (up to 5 sheets) cutting |

TENRYU
Saw Blades




TENRYU

| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
|----------|---------------|----------|---------|-----|------|-------|------|---------------|------------|---|
| WOOD | TECF-16524W | 6-1/2" | 5/8" | 24 | 20 | 0.059 | 3900 | Cordless Trim | Cord-Free | For General Purpose w/ 6-1/2" Cordless Saws |
| | TECF-16540W | 6-1/2" | 5/8" | 40 | 20 | 0.059 | 3700 | Cordless Trim | Cord-Free | For Finish Cutting w/ 6-1/2" Cordless Saws |
| | TESL-16552C | 6-1/2" | 5/8" KO | 52 | 15 | 0.063 | 9250 | Trim | Silencer | Cordless Circular Saw, Ultra Fine Trim Cuts |
| | TEPT-18524AM | 7-1/4" | 5/8" KO | 24 | 20 | 0.073 | 8300 | Circular | Power Tool | The AMIGO 24 tooth contractor blade. Fast and long cutting life |
| | TEPT-18524V | 7-1/4" | 5/8" KO | 24 | 20 | 0.073 | 8300 | Circular | Power Tool | Variable Pitch Framing - Citation - Fast, Smooth |
| | TEPT-18524P | 7-1/4" | 5/8" KO | 24 | 20 | 0.073 | 8300 | Circular | Power Tool | Great for wet, or pressure treated lumber. Green coating |
| | TERS-25540 | 10" | 5/8" | 40 | 15 | 0.118 | 5870 | Table | Rapid Cut | General purpose. Economically Priced. Great Value. |
| | TERS-25550-2 | 10" | 5/8" | 40 | 15 | 0.126 | 5870 | Table | Rapid Cut | Super Quiet Combo, Resin Filled Laser Slots |
| | TERS-25560 | 10" | 5/8" | 60 | 10 | 0.118 | 5870 | Table | Rapid Cut | General Purpose Cross-Cutting. Economically Priced. ATAF Grind |
| | TESL-25550C | 10" | 5/8" | 50 | 15 | 0.126 | 5870 | Table | Silencer | Combination for Table Saw |
| | TESL-25550TC | 10" | 5/8" | 50 | 15 | 0.11 | 5870 | Table | Silencer | Intermediate Kerf Combination |
| | TESL-25572C | 10" | 5/8" | 72 | 10 | 0.11 | 5870 | Miter | Silencer | Signature All Purpose Blade |
| | TESL-25580C | 10" | 5/8" | 80 | 5 | 0.11 | 5870 | Miter | Silencer | Very Quiet Finish Cuts |
| | TEMP-25580AB | 10" | 5/8" | 80 | -3 | 0.11 | 5870 | Miter | Miter Pro | Smoothest Finish Cuts in Wide Range Thickness |
| | TESL-30580C | 12" | 1" | 80 | 5 | 0.106 | 5000 | Miter | Silencer | Very Quiet Finish Cuts |
| | TESL-305100C | 12" | 1" | 100 | 5 | 0.106 | 5000 | Miter | Silencer | Very Quiet Fine Finish Cuts |
| | TEMP-305100AB | 12" | 1" | 100 | -3 | 0.118 | 5000 | Miter | Miter Pro | Smoothest Finish Cuts in Wide Range Thickness |
| | TEGM-25540 | 10" | 5/8" | 40 | 2 | 0.111 | 5870 | Table | Gold Medal | Combination (Premium) Gold Medal Award |
| | TEGM-25540-2 | 10" | 5/8" | 40 | 2 | 0.125 | 5870 | Table | Gold Medal | Combination (Premium) Gold Medal Award |

TENRYU
Heavy Metal Plus X Series



| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
|---|-----------------|----------|-------|----|------|-------|------|--------------|--------|------------------|
| C O R D L E S S + | TECF-13632MT | 5-3/8" | 20mm | 32 | -5 | 0.043 | 3900 | Cordless | Plus X | General Purpose |
| | TECF-13636M | 5-3/8" | 20mm | 36 | -2 | 0.049 | 3900 | Cordless | Plus X | Spiral Duct Pipe |
| | TECF-13656MT | 5-3/8" | 20mm | 56 | -10 | 0.043 | 3900 | Cordless | Plus X | Thin Sheet Metal |
| | TECF-16544MT | 6-1/2" | 5/8" | 44 | -5 | 0.049 | 5500 | Cordless | Plus X | General Purpose |
| | TECF-16564MT | 6-1/2" | 5/8" | 64 | -10 | 0.049 | 5500 | Cordless | Plus X | Thin Sheet Metal |
| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
| H E A V Y M E T A L + | TEHMC-18542DT | 7-1/4" | 5/8" | 42 | -5 | 0.055 | 6000 | Circular Saw | Plus X | General Purpose |
| | TEHMC-18572CBDT | 7-1/4" | 5/8" | 72 | -10 | 0.051 | 6000 | Circular Saw | Plus X | Roofing/Siding |
| | TEHMC-20344DT | 8" | 5/8" | 44 | -5 | 0.061 | 4300 | Circular Saw | Plus X | General Purpose |
| | TEHMC-20372CBDT | 8" | 5/8" | 72 | -10 | 0.051 | 4300 | Circular Saw | Plus X | Roofing/Siding |



Plus X Standard Kerf

Product Features

- PLUS X Technology is available for cordless and corded metal cutting saws
- Now experience even less effort with more cuts per blade than ever before

TENRYU
Corded / Cordless Circular Saws



| Material | Item # | Diameter | Arbor | #T | Rake | Kerf | RPM | Machine | Series | Application |
|--------------------------|-------------|----------|---------|----|------|-------|------|-----------------------|----------|---------------------------------------|
| FIBER CEMENT BOARD | TEBP-16504T | 6-1/2" | 5/8" | 4 | 12 | 0.073 | 5800 | Cordless Saw Board | Pro Plus | Cordless Saws, Thinner Kerf |
| | TEBP-18505T | 7-1/4" | 5/8" KO | 5 | 12 | 0.073 | 5800 | Circular Saw | Pro Plus | Corded/Cordless Saws, Thinner Kerf |

Product Features

- Especially good for 6-1/2", or 7-1/4" cordless circular saws
- Ultra thin-kerf (.073") extends the battery life per charge, reducing a significant amount of saw dust
- Easy to feed, and great for single sheet, or stacked sheets cutting (up to 5-6 sheets at a time) with no deflection



Features

- Semi-Automatic
- Economical
- Length: 13-1/4"
- Weight: 4.5 lbs
- Muzzle Bushing O.D.: 9/16"
- Maximum Pin Length: 2-1/2" (3" w/ Washer)

| Pin # | Shank Length – Inches | Qty Per Box |
|------------|----------------------------|-------------|
| RM-1503K | 1/2" Knurled | 100 |
| RM-1506 | 3/4" | 100 |
| RM-1508 | 1" | 100 |
| RM-1510 | 1-1/4" | 100 |
| RM-1512 | 1-1/2" | 100 |
| RM-1514 | 2" | 100 |
| RM-1516 | 2-1/2" | 100 |
| RM-1524 | 3" | 100 |
| RM-1506SD | 3/4" (Washed) | 100 |
| RM-1508SD | 1" (Washed) | 100 |
| RM-1510SD | 1-1/4" (Washed) | 100 |
| RM-1512SD | 1-1/2" (Washed) | 100 |
| RM-1514SD | 2" (Washed) | 100 |
| RM-1516SDC | 2-1/2" (Washed) | 100 |
| RM-1524SDP | 3" (Washed) | 100 |
| RM-1516E | 2-1/2" w/RAMGUARD | 100 |
| RM-1516SDE | 2-1/2" (Washed) w/RAMGUARD | 100 |
| RM-1524SDE | 3" (Washed) w/RAMGUARD | 100 |

.27 Caliber Strip Loads:

(3 green) - (4 yellow) - (5 red)

- RM-3RS27 (green)
- RM-4RS27 (yellow)
- RM-5RS27 (red)



Features

- 42 Pin Magazine
- Fully Automatic
- Length: 17.5"
- Height: 15-1/2"
- Weight: 7.9 lbs
- Maximum Pin Length: 1-1/2"

| Pin # | Pin Length | Most Common Application |
|------------|------------|-------------------------|
| RM-FPP012S | 1/2 | Track to Steel |
| RM-FPP034B | 3/4 | Track to Concrete |

RM-TFUEL



RM-B0092

- The 6-volt Ni-Cd battery can drive more than 3,000 shots per charge



Ramset®



RM-T4IF
Insulfast



Features

- Single Shot Gas Tool
- One Step Fuel Injection & Eject
- Length: 15"
- Height: 15.25"
- Weight: 7.6 lbs. (with battery)
- Maximum Pin Length: 6"

Fasteners for Concrete and CMU Studs

- Available in sizes 1"-6"

Fasteners for Steel Studs

- Available in sizes 1"-6"

RM-T4FUEL

- Replaces conventional powder loads and drives more than 1,000 pins



RM-18581

- The 6-volt Ni-Cd battery can drive more than 3,000 shots per charge



RM-G2
GYPFAST



Features

- 150 Pin Coil
- Fully Automatic
- Length: 15"
- Height: 15.25"
- Weight: 7.6 lbs. (with battery)
- Maximum Pin Length: 2-1/2"

| Pin # | In. | Master Carton | Application |
|----------|-------|----------------------------------|---|
| RM-GF112 | 1-1/2 | 6,000 nails/ ctn 6 fuel cells | Single Layer of Exterior Sheathing, Wood Furring and Blocking |
| RM-GF200 | 2 | 4,800 nails/ ctn 5 fuel cells | Double Layer of Exterior Gypsum Sheathing, Wood Furring and Blocking |
| RM-GF212 | 2-1/2 | 2,700 nails/ ctn 3 fuel cells | Multi-Layers of Sheathing, Wood Blocking, and Dimensional Lumber |

RM-TFUEL



RM-B0092

- The 6-volt Ni-Cd battery can drive more than 3,000 shots per charge



RM-LD100

- Plated 1" Lathing Disc



Driltec



ADX bits for drilling Rebar and metal deck

| Part # | Diameter | Usable Length | Overall Length |
|-------------|----------|---------------|----------------|
| DRADX006014 | 3/16" | 2" | 4-1/4" |
| DRADX006018 | 3/16" | 4" | 6-1/4" |
| DRADX006022 | 3/16" | 6" | 8-1/4" |
| DRADX006026 | 3/16" | 8" | 10-1/4" |
| DRADX006030 | 3/16" | 10" | 12-1/4" |
| DRADX007025 | 1/4" | 2" | 4-1/4" |
| DRADX007029 | 1/4" | 4" | 6-1/4" |
| DRADX007041 | 1/4" | 6" | 8" |
| DRADX007048 | 1/4" | 8" | 10-1/4" |
| DRADX007052 | 1/4" | 10" | 12-1/4" |
| DRADX011031 | 5/16" | 4" | 6" |
| DRADX011049 | 5/16" | 10" | 12" |
| DRADX011053 | 5/16" | 16" | 18" |
| DRADX017059 | 3/8" | 4" | 6" |
| DRADX017067 | 3/8" | 10" | 12" |
| DRADX017075 | 3/8" | 16" | 18" |
| DRADX018012 | 7/16" | 4" | 6 1/4" |
| DRADX018019 | 7/16" | 10" | 12 1/4" |
| DRADX018028 | 7/16" | 16" | 18" |
| DRADX019073 | 1/2" | 4" | 6" |
| DRADX019081 | 1/2" | 10" | 12" |
| DRADX019090 | 1/2" | 16" | 18" |
| DRADX021071 | 9/16" | 4" | 6" |
| DRADX021087 | 9/16" | 10" | 12" |
| DRADX021096 | 9/16" | 16" | 18" |
| DRADX024015 | 5/8" | 6" | 8" |
| DRADX024023 | 5/8" | 8" | 10" |
| DRADX024036 | 5/8" | 10" | 12" |
| DRADX024047 | 5/8" | 16" | 18" |
| DRADX027024 | 3/4" | 6" | 8" |
| DRADX027035 | 3/4" | 8" | 10" |
| DRADX027043 | 3/4" | 10" | 12" |
| DRADX027056 | 3/4" | 16" | 18" |
| DRADX030038 | 7/8" | 6" | 8" |
| DRADX030044 | 7/8" | 8" | 10" |
| DRADX030051 | 7/8" | 10" | 12" |
| DRADX030062 | 7/8" | 16" | 18" |
| DRADX034045 | 1" | 8" | 10" |
| DRADX034055 | 1" | 10" | 12" |
| DRADX034063 | 1" | 16" | 18" |
| DRADX038057 | 1-1/8" | 8" | 10" |
| DRADX038064 | 1-1/8" | 16" | 18" |
| DRADX043070 | 1-1/4" | 16" | 18" |

Please note: For drilling diameters 1/2" and large, use RL-Series RebarCUTTER for superior performance.



Driltec SDS-Plus Drill Bits

| Single Cutter Part | Diameter | Usable Length | Overall Length |
|--------------------|----------|---------------|----------------|
| DRAD-406-224 | 5/32" | 7" | 9" |
| DRAD-400-219 | 5/32" | 2" | 4 1/4" |
| DRAD-405-220 | 5/32" | 4" | 6 1/2" |
| DRAD-410-104 | 3/16" | 2" | 4 1/2" |
| DRAD-415-215 | 3/16" | 4" | 6 1/4" |
| DRAD-420-221 | 3/16" | 7" | 9 1/2" |
| DRAD-425-216 | 3/16" | 9" | 11 1/2" |
| DRAD-430-260 | 3/16" | 13" | 16" |
| DRAD-435-236 | 7/32" | 4" | 6 1/4" |
| DRAD-440-237 | 7/32" | 7" | 9 1/2" |
| DRAD-445-238 | 7/32" | 9" | 11 1/2" |
| DRAD-450-265 | 7/32" | 13" | 16" |
| DRAD-455-105 | 1/4" | 2" | 4 1/2" |
| DRAD-460-106 | 1/4" | 4" | 6 1/4" |
| DRAD-465-218 | 1/4" | 6" | 8 1/2" |
| DRAD-470-183 | 1/4" | 9" | 11 1/2" |
| DRAD-475-270 | 1/4" | 13" | 16" |
| DRAD-480-107 | 5/16" | 4" | 6 1/4" |
| DRAD-485-108 | 5/16" | 6" | 8 1/2" |
| DRAD-490-222 | 5/16" | 10" | 12 1/2" |
| DRAD-495-109 | 3/8" | 4" | 6 1/4" |
| DRAD-500-110 | 3/8" | 8" | 10 1/2" |
| DRAD-505-111 | 3/8" | 10" | 12 1/2" |
| DRAD-510-112 | 3/8" | 15 1/2" | 18" |
| DRAD-515-239 | 3/8" | 19 1/2" | 22" |
| DRAD-520-113 | 7/16" | 4" | 6 1/4" |
| DRAD-525-223 | 7/16" | 10" | 12" |
| DRAD-530-114 | 1/2" | 4" | 6 1/2" |
| DRAD-535-115 | 1/2" | 8" | 10" |
| DRAD-540-116 | 1/2" | 10" | 12" |
| DRAD-545-117 | 1/2" | 15 1/2" | 18" |
| DRAD-550-240 | 1/2" | 21 1/2" | 24" |
| DRAD-555-118 | 9/16" | 4" | 6 1/2" |
| DRAD-560-228 | 9/16" | 10" | 12 1/2" |
| DRAD-565-229 | 9/16" | 15 1/2" | 18" |
| DRAD-570-119 | 5/8" | 4" | 6 1/2" |
| DRAD-575-120 | 5/8" | 7" | 9 1/2" |
| DRAD-585-121 | 5/8" | 10" | 12" |
| DRAD-595-122 | 5/8" | 15 1/2" | 18" |
| DRAD-605-241 | 5/8" | 21 1/2" | 24" |
| DRAD-610-123 | 11/16" | 5" | 7" |
| DRAD-615-230 | 11/16" | 10" | 12" |
| DRAD-625-124 | 3/4" | 7" | 9 1/2" |
| DRAD-635-125 | 3/4" | 10" | 12" |
| DRAD-645-126 | 3/4" | 15 1/2" | 18" |
| DRAD-655-128 | 7/8" | 7" | 9 1/2" |
| DRAD-665-129 | 7/8" | 10" | 12" |
| DRAD-670-130 | 7/8" | 15 1/2" | 18" |
| DRAD-680-184 | 1" | 7" | 10" |
| DRAD-690-185 | 1" | 15 1/2" | 18" |
| DRAD-700-250 | 1 1/8" | 7 1/2" | 10" |
| DRAD-710-255 | 1 1/8" | 15 1/2" | 18" |





Driltec

SDS-Plus Bulk Pack



| Part Number | Diameter | Usable Length | Overall Length | Qty Per Pack |
|--------------|----------|---------------|----------------|--------------|
| DRAD-008-101 | 5/32" | 4" | 6-1/2" | 12 |
| DRAD-010-224 | 5/32" | 7" | 9-1/2" | 12 |
| DRAD-012-104 | 3/16" | 2" | 4-1/2" | 12 |
| DRAD-016-215 | 3/16" | 4" | 6-1/4" | 12 |
| DRAD-048-105 | 1/4" | 2" | 4-1/2" | 12 |
| DRAD-052-106 | 1/4" | 4" | 6-1/4" | 12 |
| DRAD-056-218 | 1/4" | 6" | 8-1/2" | 12 |
| DRAD-062-107 | 5/16" | 4" | 6-1/4" | 6 |
| DRAD-080-109 | 3/8" | 4" | 6-1/4" | 6 |
| DRAD-124-114 | 1/2" | 4" | 6-1/2" | 6 |
| DRAD-128-115 | 1/2" | 8" | 10" | 6 |
| DRAD-156-119 | 5/8" | 4" | 6-1/2" | 6 |

ADX Bits Bulk Pack



| Part Number | Diameter | Usable Length | Overall Length | Qty Per Pack |
|-------------|----------|---------------|----------------|--------------|
| ADX-001024 | 3/16" | 4" | 6 1/4" | 12 |
| ADX-001068 | 1/4" | 4" | 6 1/4" | 12 |
| ADX-001121 | 3/8" | 4" | 6 1/4" | 6 |
| ADX-001157 | 1/2" | 4" | 6 1/4" | 6 |

SDS-Plus Drill Bits with Drill Stop



| Part # | Description | Drill Bit Diameter | Drilling Depth |
|--------------|----------------------------|--------------------|----------------|
| DRADS-250065 | 1/4" Drill Stop | 1/4" | 13/16" |
| DRADS-375095 | 3/8" Drill Stop | 3/8" | 11/16" |
| DRADS-375106 | Drill bit for 1/4" Drop in | 3/8" | 1-1/16" |
| DRADS-500081 | Drill bit for 3/8" Drop in | 1/2" | 13/16" |
| DRADS-500169 | Drill bit for 3/8" Drop in | 1/2" | 1-11/16" |
| DRADS-625106 | Drill bit for 1/2" Drop in | 5/8" | 1-1/16" |
| DRADS-625206 | Drill bit for 1/2" Drop in | 5/8" | 2-1/16" |



Features

- Sturdy drill stop ring to avoid concrete penetration.
- Centering tip for quick spot drilling!
- Enhanced dust removal with full fluting to drill stop!

For a faster more secure drop-in anchor installation with the perfect anchor setting depth

Driltec



SDS-Max Drill Bits

| Single Cutter Part | Multi Cutter Part | Diameter | Usable Length | Overall Length |
|--------------------|-------------------|----------|---------------|----------------|
| DRSM-015-015 | | 3/8" | 7 1/4" | 13 1/2" |
| DRSM-030-030 | | 1/2" | 7 1/4" | 13 1/2" |
| DRSM-045-045 | | 1/2" | 10 3/4" | 17" |
| DRSM-060-060 | | 1/2" | 15" | 21 1/2" |
| DRSM-075-075 | | 1/2" | 21 3/4" | 28" |
| DRSM-075-801 | | 1/2" | 30 1/2" | 36" |
| DRSM-090-090 | | 9/16" | 7 1/4" | 13 1/2" |
| DRSM-105-105 | | 9/16" | 15" | 21 1/2" |
| | DRSM-120-120 | 5/8" | 7 1/2" | 13 1/2" |
| | DRSM-135-135 | 5/8" | 11" | 17" |
| | DRSM-150-150 | 5/8" | 15 1/4" | 21 1/2" |
| | DRSM-165-165 | 5/8" | 22" | 28" |
| | DRSM-180-180 | 5/8" | 30 1/4" | 36 1/4" |
| | DRSM-195-195 | 11/16" | 7 1/2" | 13 1/2" |
| | DRSM-210-210 | 11/16" | 15 1/4" | 21 1/2" |
| | DRSM-225-225 | 3/4" | 7 1/2" | 12 1/2" |
| | DRSM-240-240 | 3/4" | 11" | 16 1/2" |
| | DRSM-255-255 | 3/4" | 15 1/2" | 20 1/2" |
| | DRSM-270-270 | 3/4" | 22 1/4" | 28" |
| | DRSM-285-285 | 3/4" | 30 1/2" | 36 1/4" |
| | DRSM-360-360 | 7/8" | 8" | 12 1/4" |
| | DRSM-375-375 | 7/8" | 11 1/2" | 16 1/2" |
| | DRSM-390-390 | 7/8" | 15 3/4" | 20 1/4" |
| | DRSM-405-405 | 7/8" | 30 3/4" | 36" |
| | DRSM-420-420 | 1" | 8" | 12 1/4" |
| | DRSM-435-435 | 1" | 11 1/2" | 16 1/2" |
| | DRSM-450-450 | 1" | 15 3/4" | 20 1/4" |
| | DRSM-465-465 | 1" | 30 3/4" | 36 1/2" |
| | DRSM-495-495 | 1 1/8" | 11 1/2" | 16 1/2" |
| | DRSM-510-510 | 1 1/8" | 17" | 22 1/2" |
| | DRSM-525-525 | 1 1/8" | 30 3/4" | 36 1/4" |
| | DRSM-540-540 | 1 1/4" | 11 1/2" | 16 1/2" |
| | DRSM-555-555 | 1 1/4" | 17" | 22 1/2" |
| | DRSM-570-570 | 1 1/4" | 30 3/4" | 36 1/4" |
| | DRSM-600-600 | 1 3/8" | 11 1/2" | 16 1/2" |
| | DRSM-615-615 | 1 3/8" | 17" | 22 1/2" |
| | DRSM-630-630 | 1 3/8" | 30 3/4" | 36 1/4" |
| | DRSM-690-690 | 1 1/2" | 11 1/2" | 16 1/2" |
| | DRSM-705-705 | 1 1/2" | 17" | 22 1/2" |
| | DRSM-745-745 | 1 3/4" | 17" | 20 1/2" |
| | DRSM-765-765 | 2" | 17" | 20 1/2" |



Driltec

Spline Drill Bits



| Single Cutter Part | Multi Cutter Part | Diameter | Usable Length | Overall Length |
|--------------------|-------------------|----------|---------------|----------------|
| DRAE-050-131 | | 3/8" | 4" | 10" |
| DRAE-055-218 | | 3/8" | 7" | 13" |
| DRAE-060-132 | | 1/2" | 4" | 10" |
| DRAE-065-219 | | 1/2" | 7" | 13" |
| DRAE-070-133 | | 1/2" | 9 1/2" | 16" |
| DRAE-075-217 | | 1/2" | 15 1/2" | 22" |
| DRAE-080-134 | | 1/2" | 20 1/2" | 29" |
| DRAE-085-301 | | 1/2" | 30" | 36" |
| | DRAE-305-136 | 5/8" | 4" | 10" |
| | DRAE-325-137 | 5/8" | 9 1/2" | 16" |
| | DRAE-335-212 | 5/8" | 15 1/2" | 22" |
| | DRAE-345-138 | 5/8" | 20 1/2" | 29" |
| | DRAE-355-228 | 5/8" | 30" | 36" |
| | DRAE-365-139 | 11/16" | 9 1/2" | 16" |
| | DRAE-375-180 | 3/4" | 4" | 10" |
| | DRAE-385-223 | 3/4" | 7" | 13" |
| | DRAE-395-140 | 3/4" | 9 1/2" | 16" |
| | DRAE-405-141 | 3/4" | 15 1/2" | 22" |
| | DRAE-415-142 | 3/4" | 20 1/2" | 29" |
| | DRAE-425-229 | 3/4" | 30" | 36" |
| | DRAE-455-143 | 7/8" | 9 1/2" | 16" |
| | DRAE-465-144 | 7/8" | 15 1/2" | 22" |
| | DRAE-475-230 | 7/8" | 30" | 36" |
| | DRAE-505-145 | 1" | 9 1/2" | 16" |
| | DRAE-515-146 | 1" | 15 1/2" | 22" |
| | DRAE-525-231 | 1" | 30" | 36" |
| | DRAE-535-147 | 1 1/8" | 9 1/2" | 16" |
| | DRAE-545-148 | 1 1/8" | 15 1/2" | 22" |
| | DRAE-560-149 | 1 1/4" | 9 1/2" | 16" |
| | DRAE-570-150 | 1 1/4" | 15 1/2" | 22" |
| | DRAE-600-152 | 1 3/8" | 15 1/2" | 22" |
| | DRAE-630-153 | 1 1/2" | 15 1/2" | 22" |
| | DRAE-660-245 | 1 3/4" | 17" | 22 1/2" |
| | DRAE-680-265 | 2" | 17" | 22 1/2" |



d-go Expert™ dust extraction bits

SDS Max

| Part # | Description |
|-------------|------------------------------------|
| DRDMX14-600 | 1/2" x 15-1/2" x 23-1/2" SDS-Max |
| DRDMX16-600 | 5/8" x 15-1/2" x 23-1/2" SDS-Max |
| DRDMX20-600 | 3/4" x 15-1/2" x 23-1/2" SDS-Max |
| DRDMX22-600 | 7/8" x 15-1/2" x 23-1/2" SDS-Max |
| DRDMX25-600 | 1" x 15-1/2" x 23-1/2" SDS-Max |
| DRDMX28-600 | 1-1/8" x 15-1/2" x 23-1/2" SDS-Max |
| DRDMX32-600 | 1-1/4" x 15-1/2" x 23-1/2" SDS-Max |

Features

- Vacuum cleaned holes
- Increased productivity
- Available in SDS-Max
- Attach to professional vacuum cleaners
- Clean, dustless work area
- ANSI diameters

SDS Plus

| Part # | Description |
|-------------|-----------------------------------|
| DRDPL02-400 | 3/8" x 7-7/8" x 12-1/2" SDS-Plus |
| DRDPL04-400 | 1/2" x 9-3/4" x 14-1/2" SDS-Plus |
| DRDPL06-400 | 9/16" x 9-3/4" x 14-1/2" SDS-Plus |
| DRDPL08-400 | 5/8" x 9-3/4" x 14-1/2" SDS-Plus |
| DRDPL10-400 | 3/4" x 9-3/4" x 14-1/2" SDS-Plus |
| DRDPL12-400 | 7/8" x 9-3/4" x 14-1/2" SDS-Plus |



d-go Pro™

| Part # | Description | Pack Qty |
|-----------|----------------------------|----------|
| DG042-000 | Dustless Vacuum Attachment | 10 |

Features

- Dustless
- Easy
- Economical
- Clean
- Versatile
- Can be used when drilling with any drill and sizes up to 1-1/8" in diameter
- Attaches to professional vacuum cleaner





Snap Lock Adapters

SDS-Plus Adapter

| Part # | Description |
|--------------|--------------|
| DRAH-222-222 | Spline Shank |
| DRAH-230-230 | SDS-Max |

For drilling small diameter holes with SDS-Plus drill bits. Maximize usable range of large capacity Rotary Hammers.



DRAH-222-222

SDS-Max / Spline Shank Adapter

| Part # | Description |
|--------------|------------------------|
| DRAH-223-223 | Spline To SDS-Max Bits |
| DRAH-231-231 | SDS-Max To Spline Bits |

For using Spline Shank drill bits in SDS-Max Rotary Hammers and visa versa. Optimize usage of drill bit inventory.

Ratio Rebar Cutter

For use with SDS-Plus Rotary Hammers ONLY

| Part Number | Diameter | Usable Length |
|--------------|----------|------------------|
| DRRL-056-190 | 9/16" | 7-1/2" |
| DRRL-056-420 | 9/16" | 16" |
| DRRL-063-190 | 5/8" | 7-1/2" |
| DRRL-063-420 | 5/8" | 16" |
| DRRL-069-190 | 11/16" | 7-1/2" |
| DRRL-069-420 | 11/16" | 16" |
| DRRL-113-190 | 1-1/8" | 7-1/2" |
| DRRL-113-420 | 1-1/8" | 16" |
| DRRL-125-190 | 1-1/4" | 7-1/2" |
| DRRL-125-420 | 1-1/4" | 16" |
| DRRA-030-030 | | SDS Plus Adapter |



Features

- Uniquely durable and aggressive carbide tips.
- Use with engaged hammer action. Allows for continuous drilling without change of drill mode!
- Integrated ejection support for removal of reinforcement from drill body.
- Note: Consult with structural design engineer/architect before drilling rebar!

1 Piece RebarCUTTER

| Part Number | Diameter | Usable Length |
|-------------|----------|---------------|
| RL-375-300 | 3/4" | 7-1/2" |
| RL-375-460 | 3/4" | 16" |
| RL-388-300 | 7/8" | 7-1/2" |
| RL-388-460 | 7/8" | 16" |
| RL-400-300 | 1" | 7-1/2" |
| RL-400-460 | 1" | 16" |





Ratio Core Bits

Ratio Core Bit
(shown with pilot)



| Item | Description | Diameter | Overall Length | Part Number |
|-----------------------------------|---|----------|----------------|--------------|
| Core Bits (Ratio-Thread) | Use with "RA" Adapter and "DRRP-255-255" Pilot Bit. For deeper holes use "DRRE-300-300 & DRRE-450-450" extensions. | 1 1/2" | 3" | DRRK-150-150 |
| | | 2" | 3" | DRRK-200-200 |
| | | 2 1/2" | 3" | DRRK-250-250 |
| | | 3" | 3" | DRRK-300-300 |
| | | 3 1/2" | 3" | DRRK-350-350 |
| | | 3 3/4" | 3" | DRRK-375-375 |
| | | 4" | 3" | DRRK-400-400 |
| | | 4 1/2" | 3" | DRRK-450-450 |
| | | 5" | 3" | DRRK-500-500 |
| Adapter (Ratio-Thread) | Spline Shank | | 2" | DRRA-010-010 |
| | SDS-Max | | 2" | DRRA-020-020 |
| | SDS-Top | | 2" | DRRA-025-025 |
| | SDS-Plus | | 2" | DRRA-030-030 |
| Extension (with Ratio Coupler) | 11" Extension | | 11" | DRRE-300-300 |
| | 18" Extension | | 18" | DRRE-450-450 |
| Pilot Bit | Ratio Core Bits Only! | 11/16" | 6" | DRRP-255-255 |
| Coupler | Ratio Replacements | N/A | N/A | DRRT-001-001 |

One Piece Core Bits



| Description | Diameter | Usable Length | Overall Length | Spline Part Number | SDS-Max Part Number |
|-----------------------|----------|---------------|----------------|--------------------|---------------------|
| | 1 3/4" | 3" | 12" | DRCB-100-175 | DRCB-300-175 |
| | 1 3/4" | 3" | 22" | DRCB-105-175 | |
| | 2" | 3" | 12" | DRCB-110-200 | DRCB-310-200 |
| | 2" | 3" | 22" | DRCB-115-200 | DRCB-315-200 |
| | 2 3/4" | 3" | 12" | | DRCB-320-250 |
| | 2 3/4" | 3" | 22" | DRCB-125-250 | DRCB-325-250 |
| | 3 1/4" | 3" | 12" | | DRCB-330-300 |
| | 3 1/4" | 3" | 22" | DRCB-135-300 | DRCB-335-300 |
| | 3 1/2" | 3" | 12" | DRCB-140-350 | DRCB-340-350 |
| | 3 1/2" | 3" | 22" | DRCB-145-350 | DRCB-345-350 |
| | 4" | 3" | 22" | DRCB-155-400 | DRCB-355-400 |
| | 4 1/2" | 3" | 22" | DRCB-165-450 | DRCB-365-450 |
| | 5" | 3" | 22" | DRCB-175-500 | DRCB-375-500 |
| | 6" | 3" | 22" | DRCB-185-600 | DRCB-385-600 |
| Replacement Pilot Bit | | | | DRCB-985-900 | DRCB-985-900 |



Straight Shank Drill Bits



| Part Number | Diameter | Overall Length | Shank Diameter |
|--------------|----------|----------------|----------------|
| DRAS-003-003 | 1/8" | 2 1/2" | 1/8" |
| DRAS-003-009 | 1/8" | 6" | 1/8" |
| DRAS-004-009 | 5/32" | 6" | 5/32" |
| DRAS-006-006 | 3/16" | 3 1/2" | 3/16" |
| DRAS-009-009 | 3/16" | 6" | 3/16" |
| DRAS-011-015 | 7/32" | 6" | 7/32" |
| DRAS-012-012 | 1/4" | 4" | 1/4" |
| DRAS-015-015 | 1/4" | 6" | 1/4" |
| DRAS-024-024 | 5/16" | 6" | 5/16" |
| DRAS-030-030 | 3/8" | 6" | 3/8" |
| DRAS-036-036 | 3/8" | 18" | 3/8" |
| DRAS-039-039 | 3/8" | 24" | 3/8" |
| DRAS-042-042 | 1/2" | 6" | 3/8" |
| DRAS-045-045 | 1/2" | 13" | 3/8" |
| DRAS-048-048 | 1/2" | 18" | 3/8" |
| DRAS-051-051 | 1/2" | 24" | 3/8" |
| DRAS-052-052 | 9/16" | 6" | 3/8" |
| DRAS-056-056 | 5/8" | 8" | 3/8" |
| DRAS-057-057 | 5/8" | 13" | 3/8" |
| DRAS-060-060 | 3/4" | 6" | 1/2" |
| DRAS-063-063 | 3/4" | 13" | 1/2" |
| DRAS-066-066 | 7/8" | 6" | 1/2" |
| DRAS-069-069 | 7/8" | 13" | 1/2" |
| DRAS-072-072 | 1" | 6" | 1/2" |

HT Drill Bits



| Part Number | Diameter | Overall Length |
|--------------|----------|----------------|
| DRHT-005-005 | 1/8" | 3" |
| DRHT-010-010 | 5/32" | 4" |
| DRHT-015-015 | 3/16" | 4" |
| DRHT-020-020 | 1/4" | 4" |
| DRHT-025-025 | 5/16" | 4 3/4" |
| DRHT-030-030 | 3/8" | 4 3/4" |
| DRHT-033-033 | 1/2" | 6" |

For Drilling Tile, Marble, Porcelain, Ceramics, etc.

SDS-Plus Chisels



Power Point | 6 1/4" | DRAG-600-600



Bull Point | 10" | DRAG-603-603



Twisted Bull Point | 10" | AG-602-602



Power Chisel | 6 1/4" | DRAG-604-604



Flat Chisel | 3/4 x 10" | DRAG-606-606



Channel Chisel | 9" | AG-612-612



Bent Chisel | 1 1/2" x 10" | DRAG-610-610



Wide Chisel | 1 1/2" x 10" | DRAG-609-609



Scaling Chisel | 4" x 9" | DRAG-615-395



4" Scraper Assembly | 4" x 11" | DRAG-650-040



8" Scraper Assembly | 8" x 11" | DRAG-650-080



Scraper Blade Only | 4" | AG-655-040



Scraper Blade Only | 8" | AG-655-080



Bushing Tool | Carbide Tipped | DRAG-690-371



SDS-Max Chisels



Bull Point | 11" | DRAG-230-203

Bull Point | 16" | DRAG-235-204



Flat Chisel | 11" | DRAG-240-205

Flat Chisel | 16" | DRAG-245-206



Scaling Chisel | 2" x 12" | DRAG-250-210

Scaling Chisel | 2" x 16" | DRAG-255-207

Scaling Chisel | 3" x 12" | DRAG-260-208



Bent Chisel | 3" x 12" | DRAG-261-211

Bent Chisel | 3" x 17-1/2" | AG-262-212



Slotting Tool | 1 1/4" x 12" | DRAG-265-209



Clay Spade | 4 1/2" x 5" x 19" | DRAG-270-215



Pointed Spade | 5" x 21" | DRAG-271-218



Asphalt Cutter | 5" x 5" x 19" | DRAG-275-220



Floor Scraper | 6" x 5" | DRAG-310-340



Floor Scraper Adapter | 14" x 16" | DRAG-285-341



Ground Rod Driver | 5/8" x 10" Adapter | DRAG-280-231

Ground Rod Driver | 3/4" x 10" Adapter | DRAG-280-232



Bushing Tool | 1 3/4" x 1 3/4" x 9" | DRAG-290-370



Bushing Tool Carbide | 1 3/4" x 1 3/4" x 9 3/4" | DRAG-290-371



Spline Chisels



Bull Point | 1" x 12" | DRAG-110-192

Bull Point | 1" x 16" | DRAG-115-193



Flat Chisel | 12" | DRAG-120-190

Flat Chisel | 16" | DRAG-125-191



Scaling Chisel | 2" x 12" | DRAG-130-195

Scaling Chisel | 3" x 12" | DRAG-135-198



Slotting Chisel | 1 1/2" x 12" | DRAG-140-209



Clay Spade | 4" x 5" x 19" | DRAG-145-215



Asphalt Cutter | 5" x 5" x 19" | DRAG-150-220



Floor Scraper | 6" x 5" | DRAG-310-340



Floor Scraper Adapter | 14" x 16" | DRAG-165-341



Ground Rod Driver | 3/4" x 10" | DRAG-160-232



Bushing Tool | 1 3/4" x 1 3/4" x 9" | DRAG-170-350

1 1/8" Chisels



Moil Point | 20" | DRAG-705-705



Flat Chisel | 20" | DRAG-715-715



3" Flat Chisel | 3" | DRAG-725-725



Asphalt Cutter | 4 1/2" x 5" | DRAG-735-735

(HSS) High Speed Steel Hand Taps

Machine Screw Ground Thread



| Part # | Machine Screw Thread | # of Flutes | Ground Thread Limit | OAL | Use Thread Length | Drill Size |
|--------------|----------------------|-------------|---------------------|--------|-------------------|------------|
| IT-263NC0006 | 6-32 NC | 3 | H2 | 2" | 11/16" | 35 |
| IT-263NC0008 | 8-32 NC | 4 | H3 | 2-1/8" | 3/4" | 29 |
| IT-263NC0010 | 10-24 NC | 4 | H3 | 2-3/8" | 7/8" | 25 |
| IT-263NF0010 | 10-32 NF | 4 | H3 | 2-3/8" | 7/8" | 21 |
| IT-263NC0012 | 12-24 NC | 4 | H3 | 2-3/8" | 15/16" | 16 |

(HSS) High Speed Steel Hand Taps

Fractional Ground Thread



| Part # | Machine Screw Thread | # of Flutes | Ground Thread Limit | OAL | Use Thread Length | Drill Size |
|--------------|----------------------|-------------|---------------------|--------|-------------------|------------|
| IT-266NC0310 | 1/4"-20 NC | 4 | H3 | 2-1/2" | 1" | 7 |

6" Long Spade Wood Drill



| Part # | Size | OAL | Qty |
|--------------|--------|-----|-----|
| IT-300SB2064 | 5/16" | 6" | 1 |
| IT-300SB2464 | 3/8" | 6" | 1 |
| IT-300SB2864 | 7/16" | 6" | 1 |
| IT-300SB3264 | 1/2" | 6" | 1 |
| IT-300SB3664 | 9/16" | 6" | 1 |
| IT-300SB4064 | 5/8" | 6" | 1 |
| IT-300SB4464 | 11/16" | 6" | 1 |
| IT-300SB4864 | 3/4" | 6" | 1 |
| IT-300SB5264 | 13/16" | 6" | 1 |
| IT-300SB5664 | 7/8" | 6" | 1 |
| IT-300SB6464 | 1" | 6" | 1 |
| IT-300SB7264 | 1-1/8" | 6" | 1 |
| IT-300SB8064 | 1-1/4" | 6" | 1 |
| IT-300SB8864 | 1-3/8" | 6" | 1 |
| IT-300SB9664 | 1-1/2" | 6" | 1 |

Features

- Cold Forge
- Rust Protection
- Individually
- Wing Tip Design
- Industrial Quality
- Machine Finish Cutting Groove
- 1/4" Hex Power Groove Shank
- Stamped w/ size
- Full Length Treated

Jobber Drills

General Purpose - Bright Finish M2 HSS



| Part # | Size | Dec. | OAL | Flute | Qty. |
|--------------|--------|--------|--------|----------|------|
| IT-250US0464 | 1/16" | 0.0625 | 1-7/8" | 7/8" | 12 |
| IT-250US0564 | 5/64" | 0.0781 | 2" | 1" | 12 |
| IT-250US0664 | 3/32" | 0.0938 | 2-1/4" | 1-1/4" | 12 |
| IT-250US0764 | 7/64" | 0.1094 | 2-5/8" | 1-1/2" | 12 |
| IT-250US0864 | 1/8" | 0.1250 | 2-3/4" | 1-5/8" | 12 |
| IT-250US0964 | 9/64" | 0.1406 | 2-7/8" | 1-3/4" | 12 |
| IT-250US1064 | 5/32" | 0.1562 | 3-1/8" | 2" | 12 |
| IT-250US1164 | 11/64" | 0.1719 | 3-1/4" | 2-1/8" | 12 |
| IT-250US1264 | 3/16" | 0.1875 | 3-1/2" | 2-5/16" | 12 |
| IT-250US1364 | 13/64" | 0.2031 | 3-5/8" | 2-7/16" | 12 |
| IT-250US1464 | 7/32" | 0.2188 | 3-3/4" | 2-1/2" | 12 |
| IT-250US1564 | 15/64" | 0.2344 | 3-7/8" | 2-5/8" | 12 |
| IT-250US1664 | 1/4" | 0.2500 | 4" | 2-3/4" | 12 |
| IT-250US1764 | 17/64" | 0.2656 | 4-1/8" | 2-7/8" | 12 |
| IT-250US1864 | 9/32" | 0.2812 | 4-1/4" | 2-15/16" | 12 |
| IT-250US1964 | 19/64" | 0.2969 | 4-3/8" | 3-1/16" | 12 |
| IT-250US2064 | 5/16" | 0.3125 | 4-1/2" | 3-3/16" | 12 |
| IT-250US2164 | 21/64" | 0.3281 | 4-5/8" | 3-5/16" | 6 |
| IT-250US2264 | 11/32" | 0.3483 | 4-3/4" | 3-7/16" | 6 |
| IT-250US2364 | 23/64" | 0.3594 | 4-7/8" | 3-1/2" | 6 |
| IT-250US2464 | 3/8" | 0.3750 | 5" | 3-5/8" | 6 |
| IT-250US2564 | 25/64" | 0.3906 | 5-1/8" | 3-3/4" | 6 |
| IT-250US2664 | 13/32" | 0.4062 | 5-1/4" | 3-1/8" | 6 |
| IT-250US2764 | 27/64" | 0.4219 | 5-3/8" | 3-15/16" | 6 |
| IT-250US2864 | 7/16" | 0.4375 | 5-1/2" | 4-1/16" | 6 |
| IT-250US2964 | 29/64" | 0.4531 | 5-5/8" | 4-3/16" | 6 |
| IT-250US3064 | 15/32" | 0.4688 | 5-3/4" | 4-5/16" | 6 |
| IT-250US3164 | 31/64" | 0.4844 | 5-7/8" | 4-3/8" | 6 |
| IT-250US3264 | 1/2" | 0.5000 | 6" | 4-1/2" | 6 |

Features

- Jobber Length
- 118 degree point
- General Purpose
- Ground Flute
- Straight Shank
- Bright Finish
- M2 HSS



1/4" Hex Extra Hard Phillips Insert



| Part # | Point Size | Overall Length |
|-----------|------------|----------------|
| VE-125P1A | 1 | 1" |
| VE-125P2A | 2 | 1" |
| VE-125P3A | 3 | 1" |
| VE-125P4A | 4 | 1" |

1/4" Hex Extra Hard Phillips Power Bits



| Part # | Point Size | Overall Length |
|------------|------------|----------------|
| VE-150P1A | 1 | 2" |
| VE-150P2A | 2 | 2" |
| VE-150P3A | 3 | 2" |
| VE-170P1A | 1 | 2-3/4" |
| VE-170P2A | 2 | 2-3/4" |
| VE-170P3A | 3 | 2-3/4" |
| VE-170P4A | 4 | 2-3/4" |
| VE-190P1A | 1 | 3-1/2" |
| VE-190P2A | 2 | 3-1/2" |
| VE-190P3A | 3 | 3-1/2" |
| VE-1150P1A | 1 | 6" |
| VE-1150P2A | 2 | 6" |
| VE-1150P3A | 3 | 6" |
| VE-1200P2A | 2 | 8" |
| VE-1250P2A | 2 | 10" |
| VE-1300P2A | 2 | 12" |

1/4" Hex Extra Hard Phillips Insert Bits

For Drywall Screws



| Part # | Point Size | Overall Length |
|-----------|------------|----------------|
| VE-125P1R | 1 | 1" |
| VE-125P2R | 2 | 1" |

1/4" Hex Phillips Drywall Indenter



| Part # | Point Size | Overall Length |
|-----------|------------|----------------|
| VE-125P2C | 2 | 1" |

1/4" Hex Extra Hard Torx Insert Bits



| Part # | Point Size | Overall Length |
|------------|------------|----------------|
| VE-125T10A | 10 | 1" |
| VE-125T15A | 15 | 1" |
| VE-125T20A | 20 | 1" |
| VE-125T25A | 25 | 1" |
| VE-125T27A | 27 | 1" |
| VE-125T30A | 30 | 1" |
| VE-125T40A | 40 | 1" |
| VE-125T50A | 50 | 1" |

1/4" Hex Extra Hard Torx Power Bits



| Part # | Point Size | Overall Length |
|-------------|------------|----------------|
| VE-150T10A | 10 | 2" |
| VE-150T15A | 15 | 2" |
| VE-150T20A | 20 | 2" |
| VE-150T25A | 25 | 2" |
| VE-150T27A | 27 | 2" |
| VE-150T30A | 30 | 2" |
| VE-150T40A | 40 | 2" |
| VE-170T10A | 10 | 2-3/4" |
| VE-170T15A | 15 | 2-3/4" |
| VE-170T20A | 20 | 2-3/4" |
| VE-170T25A | 25 | 2-3/4" |
| VE-170T30A | 30 | 2-3/4" |
| VE-170T40A | 40 | 2-3/4" |
| VE-190T10A | 10 | 3-1/2" |
| VE-190T15A | 15 | 3-1/2" |
| VE-190T20A | 20 | 3-1/2" |
| VE-190T25A | 25 | 3-1/2" |
| VE-190T27A | 27 | 3-1/2" |
| VE-190T30A | 30 | 3-1/2" |
| VE-190T40A | 40 | 3-1/2" |
| VE-1150T10A | 10 | 6" |
| VE-1150T15A | 15 | 6" |
| VE-1150T20A | 20 | 6" |
| VE-1150T25A | 25 | 6" |
| VE-1150T30A | 30 | 6" |
| VE-1150T40A | 40 | 6" |



Nutsetters

1/4" Standard Magnetic Nutsetter



| Part # | Broached Hex | Overall Length |
|---------------|--------------|----------------|
| VE-145MN416 | 1/4" | 1-3/4" |
| VE-145MN516 | 5/16" | 1-3/4" |
| VE-145MN616 | 3/8" | 1-3/4" |
| VE-145MN716 | 7/16" | 1-3/4" |
| VE-145MN816 | 1/2" | 1-3/4" |
| VE-165MN416 | 1/4" | 2-9/16" |
| VE-165MN516 | 5/16" | 2-9/16" |
| VE-165MN616 | 3/8" | 2-9/16" |
| VE-165MN716 | 7/16" | 2-9/16" |
| VE-165MN816 | 1/2" | 2-9/16" |
| VE-165MN916 | 9/16" | 2-9/16" |
| VE-1100MN416S | 1/4" | 4" |
| VE-1100MN516S | 5/16" | 4" |
| VE-1100MN616S | 3/8" | 4" |
| VE-1100MN716S | 7/16" | 4" |
| VE-1150MN416S | 1/4" | 6" |
| VE-1150MN516S | 5/16" | 6" |
| VE-1150MN616S | 3/8" | 6" |
| VE-1150MN716S | 7/16" | 6" |
| VE-1200MN416 | 1/4" | 8" |
| VE-1200MN516 | 5/16" | 8" |
| VE-1200MN616 | 3/8" | 8" |
| VE-1250MN416 | 1/4" | 10" |
| VE-1250MN516 | 5/16" | 10" |
| VE-1250MN616 | 3/8" | 10" |
| VE-1300MN416 | 1/4" | 12" |
| VE-1300MN516 | 5/16" | 12" |
| VE-1300MN616 | 3/8" | 12" |

Extra Hard Phillips Square-Driv® Acr®

1/4" Hex Insert Bits



| Part # | Point Size | Overall Length |
|-------------|------------|----------------|
| VE-125PSD22 | 2-2 | 1" |

1/4" Hex Phillips Square-Driv® Acr®



| Part # | Point Size | Overall Length |
|--------------|------------|----------------|
| VE-150PSD22 | 2-2 | 2" |
| VE-170PSD22 | 2-2 | 2-3/4" |
| VE-190PSD22 | 2-2 | 3-1/2" |
| VE-1150PSD22 | 2-2 | 6" |

Extra Hard Square Bits

1/4" Extra Hard Square Insert Bits



| Part # | Point Size | Overall Length |
|-----------|------------|----------------|
| VE-125R1A | 1 | 1" |
| VE-125R2A | 2 | 1" |
| VE-125R3A | 3 | 1" |

1/4" Extra Hard Square Power Bits



| Part # | Point Size | Overall Length |
|------------|------------|----------------|
| VE-150R1A | 1 | 2" |
| VE-150R2A | 2 | 2" |
| VE-150R3A | 3 | 2" |
| VE-170R1A | 1 | 2-3/4" |
| VE-170R2A | 2 | 2-3/4" |
| VE-170R3A | 3 | 2-3/4" |
| VE-190R1A | 1 | 3-1/2" |
| VE-190R2A | 2 | 3-1/2" |
| VE-190R3A | 3 | 3-1/2" |
| VE-1150R1A | 1 | 6" |
| VE-1150R2A | 2 | 6" |
| VE-1150R3A | 3 | 6" |

Special Driver

1/4" Eye Lag Screw Driver



| Part # | Hex Size | Overall Length |
|------------|----------|----------------|
| VE-168ELSD | 1/4" | 2-11/16" |




Bit Holders

Magnetic Bit Holder 1 Piece Construction



| Part # | Overall Length | ØD |
|-------------|----------------|--------|
| VE-175MH1CD | 3" | 0.433" |

Magnetic 1 Piece Quick Release Bit Holder - 1/4" Hex Drive



| Part # | Overall Length | ØD |
|--------------|----------------|--------|
| VE-150MH1QD | 2" | 0.433" |
| VE-160MH1QD | 2-3/8" | 0.433" |
| VE-175MH1QD | 3" | 0.433" |
| VE-1100MH1QD | 4" | 0.433" |
| VE-1150MH1QD | 6" | 0.433" |

Magnetic Screw Cap Holder with Rubber O-Ring - 1/4" Hex Drive



| Part # | Overall Length | ØD |
|-------------|----------------|--------|
| VE-175MH1CC | 3" | 0.433" |

Bit Kits

VE-V32-1P



| Contents | |
|--------------------------|--|
| Phillips | 0, 1, 2, 2R, 3 |
| Torx® | 10, 15, 20, 25, 27, 30, 40 |
| Slotted | 3-4, 4-5, 6-8, 8-10, 10-12 |
| Hex | 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 |
| Square | 1, 2, 3 |
| Socket | 1/4 X 1/4 |
| Quick Release Bit Holder | |

VE-V50-1P



| Contents | |
|-------------------|--|
| Phillips | 0, 1, 2, 3 |
| Phillips | 0, 1, 2, 3, (Acr) |
| Pozidriv® | 0, 1, 2, 3 |
| Torx® | 5, 6, 7, 8, 9, 10, 15, 20, 25, 27, 30 |
| Slotted | 3-4, 4-5, 5-6, 6-8, 8-10, 10-12, 12-14, 14-16 |
| Hex | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4, 5/16 |
| Square | 0, 1, 2, 3 |
| Adapter | 1/4 X 1/4 |
| Socket Bit Holder | |



VE-VHS100A 100 PC Master Bit Set

| Contents | |
|----------------|--|
| Phillips | 0, 1, 2, 2R, 3, 4 |
| Pozidriv® | 0, 1, 2, 3, 4 |
| Square | 0, 1, 2, 3, 4 |
| Torx® | 6, 7, 8, 9, 10, 15, 20, 25, 27, 30, 40, 45, 50 |
| Clutch | 1, 2, 3 |
| Hex | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4 |
| Slotted | 3-4, 4-5, 5-6, 6-8, 8-10, 10-12 |
| Phillips ACR® | Li 0, 1, 2R, 2, 3 |
| Pozidriv® ACR® | 1, 2, 3 |
| Spline | 4, 5, 6, 8 |
| Torq-Set® | 4, 5, 6, 8, 10, 1/4 |
| Spanner | 4, 6, 8, 10, 12 |
| Torx® Tamper | 6, 7, 8, 9, 10, 15, 20, 25, 27, 30, 40 |
| Hex Tamper® | 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4 |
| Tri-Wing | 1, 2, 3, 4, 5 |

*Adapter for 1/4" Socket 1/4" x 1", 1/4" x 2"

*Bit Holder for 1/4" Hex Bits 1/4" x 2.236"

*Y-Adapter for Hook Screws

*Socket for 1/4" Hex Bits

Albion Caulking Guns



| Part # | Description |
|-------------|---|
| ALB-B26 | 1/10 Gallon B-Line Manual Cartridge Gun w/ High Thrust 26:1 Drive |
| ALB-B26Q | 1 Quart B-Line Manual Cartridge Gun w/ High-Thrust 26:1 Drive |
| ALB-B26T825 | 750 x 75 ml B-Line Manual Multi-Component Cartridge Gun (10:1, 2:1) |

Orange Peels

Pre-moistened wipe with a powerful orange oil formula will quickly clean metals, laminates, fiberglass, machinery, concrete, and tools. Cuts through grease, oil, paints, sealants, tar, wax, and most graffiti. Contains lanolin and vitamin E so they are safe on skin. Dual texture: scrub clean with the textured side, then use the smooth side for a final wipe.



| Part # | Size | Packaging | Count |
|-----------|-----------|-----------|---------------------------|
| BRO-20216 | 10" x 12" | Tub | 70/wipes/tub; 6 tubs/case |

Asphalt Anchors


| Part Number | Description | Drill Bit Diameter | Pull Rated | Qty |
|---------------|---|--------------------|------------|--------|
| AAG-SP10-38* | 6" Asphalt Anchor w/ 3/8" Female | 7/8" | 1500 lbs | 6PACK |
| AAG-SP10-38S* | 6" Stainless Asphalt Anchor | 7/8" | 1500 lbs | 6PACK |
| AAG-SP12-38 | 12" Asphalt Anchor w/ 3/8" Female | 7/8" | 2000 lbs | 6PACK |
| AAG-SP12-38S | 12" Stainless Asphalt Anchor | 7/8" | 2000 lbs | 6PACK |
| AAG-SP18-716 | 12" Asphalt Anchor w/ 7/16" Female | 1" | 2500 lbs | 6PACK |
| AAG-SP18-716S | 12" Stainless Asphalt Anchor | 1" | 2500 lbs | 6 PACK |
| AAG-SP58-58 | 10" Asphalt Anchor w/ 5/8 Female | 1-1/2" | 5000 lbs | 6 PACK |
| AAG-SP58-58S | 10" Stainless Asphalt Anchor | 1-1/2" | 5000 lbs | 6 PACK |
| AAG-AM625 | 6" Polycarbonate Asphalt Anchor w/ 1/4" screw | 7/8" | 1500 lbs | 6 PACK |
| AAG-EPX2 | Anchor Concrete Grout to Hold | N/A | N/A | 6PACK |

*2 anchors to 1 bag of grout

Features

- Anchors are flush-mounted to the asphalt and provide a clean internal thread for attaching bolts to the anchors
- Installation requires drilling a hole and filling it with our inexpensive grout, then pushing the anchor in until it is flush w/ asphalt surface

For more informaton, visit www.asphaltanchors.com



Safety Supplies

Features

- 144/pr in a case
- 12/pr in a bundle

PIP-34-874 MaxiFlex Ultimate

Seamless Knit Nylon / Lycra Glove with Nitrile Coated MicroFoam Grip on Palm & Fingers and AD-APT® Technology

- Part #**
- PIP-34-874S*
- PIP-34-874M*
- PIP-34-874L*
- PIP-34-874XL*
- PIP-34-874XXL*
- PIP-34-874XXXL*



*Available tagged

PIP-34-8743 MaxiFlex Cut 3

Seamless Knit Engineered Yarn Glove with Premium Nitrile Coated MicroFoam Grip on Palm & Fingers

- Part #**
- PIP-34-8743L
- PIP-34-8743XL



PIP-41-1430 Gloves PowerGrab Thermo

Seamless Knit Nylon Glove with Hi-Vis Acrylic Liner and Latex MicroFinish Grip on Palm & Fingers

- Part #**
- PIP-41-1430M*
- PIP-41-1430L*
- PIP-41-1430XL*
- PIP-41-1430XXL*



*Available tagged

PIP-34-800 MaxiFoam Premium

Seamless Knit Nylon Glove with Nitrile Coated Foam Grip on Palm & Fingers

- Part #**
- PIP-34-800L
- PIP-34-800XL
- PIP-34-800XXL



PIP-39-C122

Seamless Knit Cotton / Polyester Glove with Latex Coated Smooth Grip on Palm & Fingers - Regular Grade

- Part #**
- PIP-39-C122L
- PIP-34-C122XL



PIP-16-PK-D622 Great White Cut 3

Seamless Knit Dyneema Diamond Blended Glove with Polyurethane Coated Smooth Grip on Palm & Fingers.

- Part #**
- PIP-16-PK-D622L*
- PIP-16-PK-D622XL*
- PIP-16-PK-D622XXL*

*Tagged



Safety Supplies

Zenon Z13™

Rimless Safety Glasses with Clear Temple, I/O Lens and Anti-Scratch Coating

Part #

PIP-250-06-0002



Anser™

Semi-Rimless Safety Glasses with Black Frame, Clear Lens and Anti-Scratch Coating

Part #

PIP-250-AN-10111



Zenon Z12™

Rimless Safety Glasses with Black Temple, Silver Mirror Lens and Anti-Scratch Coating

Part #

PIP-250-01-0005



Anser™

Semi-Rimless Safety Glasses with Black Frame, Gray Lens and Anti-Scratch Coating

Part #

PIP-250-AN-10112



Zenon Z13™

Rimless Safety Glasses with Light Blue Temple, Light Blue Lens and Anti-Scratch Coating

Part #

PIP-250-06-5503



Anser™

Semi-Rimless Safety Glasses with Camouflage Frame, Brown Lens and Anti-Scratch Coating

Part #

PIP-250-AN-10121



Zenon Z13™

Rimless Safety Glasses with Amber Temple, Amber Lens and Anti-Scratch Coating

Part #

PIP-250-06-5509



Cefiro™

Full Frame Safety Glasses with Black Frame, Rubber Foam Padding, Silver Mirror Lens and Anti-Scratch / Anti-Fog Coating

Part #

PIP-250-CE-10095




Features

- 12 in a box



One Minute E-Train is a Video Blog (Vlog), the purpose of which is to provide continual education in very short intervals at the time of your convenience and discretion. The content will be properties, applications, and techniques of construction fasteners, supplies, and equipment. It is our intention to bring you interesting information that will directly benefit you or provide a broader knowledge of the construction industry. For more information on One Minute E-Train, or to sign-up to receive our periodic videos via email, please mail us at info@oneminuteetrain.com

**Training In
Just One Minute!**

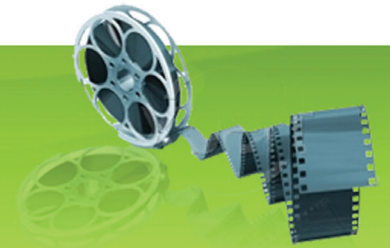

Specialty Tools & Fasteners Distributors Association is an educational trade association comprised of 2500 of the leading distributors, manufacturers, and manufacturers' representatives of light construction, industrial, and related products. Norfast, Inc. has been a member since 1980.

TRUFAST



TENRYU

TodoProducts

THE ORIGINAL GRIPCON
perma-grip[®]

Buildex
Tapcon[®]
*1 CHOICE OF PROFESSIONALS



SAMMYS[®]



TRAKFAST

SPAX[®]



TOGGLER[®]
HIGH-PERFORMANCE ANCHORS[®]

GRABBER.
CONSTRUCTION PRODUCTS



